

# **Water Year 2013**

## **Oregon Walla Walla Basin Aquifer Recharge Report**



**FINAL REPORT**

**February 2014**

# Oregon Walla Walla Basin Aquifer Recharge Report

**Written by:**

Steven Patten, Senior Environmental Scientist, WWBWC

**Reviewed by:**

Chris Augustine, RG, GSI Water Solutions, Inc.

Kevin Lindsey, PhD, GSI Water Solutions, Inc,



Expires 4-30-2014

Walla Walla Basin Watershed Council

In Cooperation with Hudson Bay District Improvement Company

2014

## EXECUTIVE SUMMARY

This report summarizes the results of the Water Year (WY) 2013 at the Johnson, Trumbull and Anspach Artificial Recharge (AR) sites. These projects were operated under two Limited Licenses (LL- 1189 & LL-1433) issued by Oregon Water Resources Department (OWRD) during WY 2013, and this report was prepared per Condition 11 of LL-1433 to present water quality, water level and operation of the AR sites.

Source water for these artificial recharge projects was diverted from the Walla Walla River at the Little Walla Walla Diversion in Milton-Freewater, OR. The water was delivered down the Hudson Bay District Improvement Company's irrigation system to each site's turnout. The recharge season started November 1<sup>st</sup>, 2013 and ended May 15<sup>th</sup>, 2013. The season was interrupted by the annual cleaning of the fish screens at the Little Walla Walla Diversion during the month of February. The total amount of water diverted under LL-1189 and LL-1433 for the WY 2013 was 5,826.35 acre-feet.

Water level and water quality data were collected according to the approved monitoring plan for LL-1189 and LL-1433. Monitoring wells in the vicinity of the recharge projects responded to recharge activities with groundwater levels rising and falling as recharge was started and ended. After recharge operations stopped May 15<sup>th</sup>, 2013, some of the monitoring wells showed declining water levels while other maintained or had increasing water levels due to increasing irrigation use (more water applied to the land and in the ditches/canals).

During the WY 2013 recharge season more water was infiltrated into the alluvial aquifer than in any previous year under LL-1189. With improved operations at the Johnson site and additional recharge sites becoming operational it is expected that the volume of water recharged will continue to increase in future years (assuming recharge activities are not hindered by low-flows).

# TABLE OF CONTENTS

|   |    |
|---|----|
| Executive Summary.....  | i  |
| Introduction.....   | 1  |
| Hydrologic Setting.....   | 2  |
| Aquifer Recharge Site Infrastructure Design and Operation ..... | 10 |
| Johnson Aquifer Recharge Site.....                              | 10 |
| Spreading Basins.....   | 12 |
| Infiltration Galleries.....                                     | 13 |
| Trumbull Aquifer Recharge Site.....                             | 15 |
| Anspach Aquifer Recharge Site.....                              | 17 |
| Modifications to AR Operations Under Limited License 1433 ..... | 18 |
| WY 2013 Recharge System Monitoring.....                         | 19 |
| Diversion System.....   | 19 |
| Johnson Recharge Site .....                                     | 20 |
| Alluvial Aquifer Well Responses.....                            | 22 |
| Trumbull Site.....  | 28 |
| Alluvial Aquifer Response .....                                 | 28 |
| Anspach Recharge Site .....                                     | 31 |
| Overview.....   | 31 |
| Alluvial Well Responses .....                                   | 32 |
| Water Quality Monitoring .....                                  | 34 |
| Source Water Quality During WY 2013 .....                       | 34 |
| Table 2. Source Water #1 – Zerba Weir.....                      | 35 |
| Table 3. Source Water #2 – Johnson Intake/Duff weir .....       | 35 |
| Table 4. Source Water #3 – Huffman-Richartz Split .....         | 36 |
| Groundwater Quality Monitoring .....                            | 36 |
| Table 6. GW_141 (PMW-2 in the Monitoring Plan) .....            | 37 |
| Table 7. GW_46 .....  | 38 |
| Table 8. GW_117 (PMW-3 in the Monitoring Plan) .....            | 38 |
| Table 9. GW_142 (PVM-3 in Monitoring Plan) .....                | 39 |
| Table 10. GW_119 .....  | 39 |
| Table 11. GW_144 (PMW-5 in Monitoring Plan).....                | 40 |

|  |    |
|--|----|
| Discussion of Results.....   | 41 |
| Proposed AR Program in WY 2013 .....   | 41 |
| References .....   | 43 |
| Appendix A – Limited License LL-1189   |    |
| Appendix B – Limited License LL-1433   |    |
| Appendix C – LL-1433 Source and Groundwater Monitoring Plan (without Appendices) |    |
| Appendix D – Recharge Site Designs   |    |
| Appendix E – Water Quality Results   |    |
| Appendix F – Well Logs for Monitoring Wells                                      |    |

## INTRODUCTION

This report describes groundwater level monitoring data, surface and groundwater quality sampling data and artificial recharge (AR) operations during WY 2013 performed by the Walla Walla Basin Watershed Council (WWBWC) in cooperation with the Hudson Bay District Improvement Company (HBDIC). The Walla Walla Basin AR program has been in existence since 2004. The first pilot project, the Hulette Johnson site, was started in Oregon in the spring of 2004. The program expanded in 2006 with the addition of the Hall-Wentland site just south of the Oregon-Washington state line. The first AR site in the Walla Walla watershed within Washington (Locher Road) was put into operation in 2007. For a more in-depth background to the AR program and the Walla Walla basin's hydrology and geology, please see the Walla Walla Basin Aquifer Recharge Strategic Plan (available at [www.wwbwc.org](http://www.wwbwc.org)).

In contrast to other AR projects being implemented nationally and internationally, the Walla Walla alluvial aquifer projects are not currently being implemented to store water that can later be recovered for beneficial use. Although some use of the stored water is likely occurring at existing water supply wells located hydraulically down gradient of the current AR sites, the primary purpose of AR in the Walla Walla Basin is to restore the watershed by enhancing groundwater contributions to instream flow for public and regional benefits. Increases in groundwater levels will not only enhance stream and river baseflow during periods of seasonally low flow, but will also result in multiple benefits including those for aquatic life and additional water for recreational, domestic, and irrigation uses.

During WY 2013, the project was operated under Limited Licenses (LL) 1189 (Appendix A) and LL-1433 (Appendix B) issued by OWRD. LL-1433 was issued on March 11, 2013 and supercedes LL-1189 for operations after the date of issuance. All AR operations, data collection and monitoring performed prior to March 11, 2013 complied with the conditions of AR testing under LL-1189. Source water for artificial recharge was diverted from the Walla Walla River at the Little Walla Walla Diversion in Milton-Freewater, Oregon at a maximum rate of 45 cubic feet per second (cfs) between November 1<sup>st</sup>, 2012 and May 15<sup>th</sup>, 2013, with a 28 day interruption during February to allow for annual cleaning of the Little Walla Walla Diversion fish screens. The water diverted for recharge was delivered down the Hudson Bay District Improvement Company's irrigation system to each AR site's turnout. The total amount of water diverted under LL-1189 and LL-1433 for the 2012-2013 was 5,826.35 acre-feet.

Per Condition 11 of LL- 1433, WWBWC is required to submit an annual report that provides detailed descriptions of the operations and observations during testing of AR in WY2012 at the Johnson AR (Johnson) site, the Trumbull AR (Trumbull) site and the Anspach AR (Anspach) site. The annual reports main goals are to 1) analyze the data to evaluate how AR operations are influencing groundwater quality and groundwater levels and 2) provide recommendations for modifications to the monitoring program and AR operations based on interpretation of the data. Diverted surface water volume, AR volumes and application rates, groundwater elevations, source

water quality and groundwater quality data were collected in general accordance with the approved monitoring plan for LL-1189 and LL-1433.

Presentation of the WY 2013 AR program operations and results are organized as follows in this report:

- Introduction
- Hydrologic Setting
- Aquifer Recharge Sites Design and Construction
- Modifications to AR Operations and Monitoring Under LL 1433
- WY 2013 AR System Operation and Monitoring
  - Source water diversion
  - Johnson Recharge Site
  - Trumbull Recharge Site
  - Anspach Recharge Site
- Water Quality Monitoring
  - Source Water Quality
  - Groundwater Quality
- Recommendations for WY 2014

Appendices are provided at the end of the report as well as a compact disc with water level data in the OWRD requested format.

## **HYDROLOGIC SETTING**

The Walla Walla River (River) system is a bi-state watershed located in northeast Oregon and southeast Washington (Figure 1). The River's headwaters are located in the Blue Mountains, the crest of which defines the eastern extent of the watershed. The mainstem Walla Walla River and its primary tributaries, Mill Creek and the Touchet River, are the three primary surface water channels of the system. They coalesce within the Walla Walla Valley from which the Walla Walla River then flows draining to the Columbia River (Figure 2). This report focuses on the portion of the River system that comprises the Walla Walla River mainstem and the distributary network, especially where they flow onto and across the area referred to in the balance of this report as the Walla Walla Valley.

The Walla Walla Valley receives between 10 (near Touchet WA) to 15 (near Milton-Freewater, OR) inches of precipitation on average (USGS and Washington Department of Ecology). During WY 2013, the basin received ~11.23 inches of precipitation near Milton-Freewater, OR, slightly lower than/near the lower end of the average precipitation range for the Walla Walla Valley.

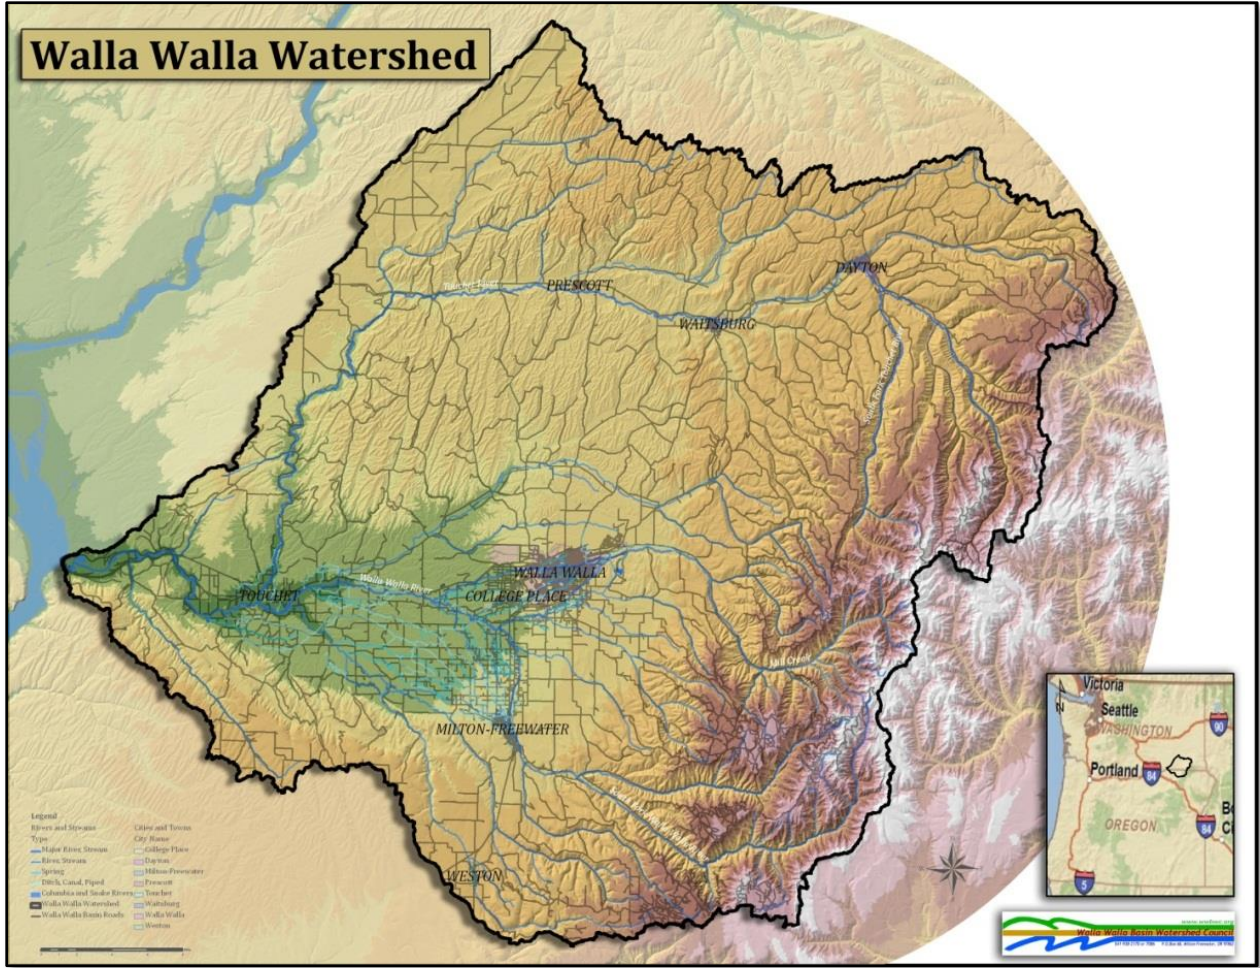


Figure 1 - The Walla Walla Watershed in Northeast Oregon and Southeast Washington.



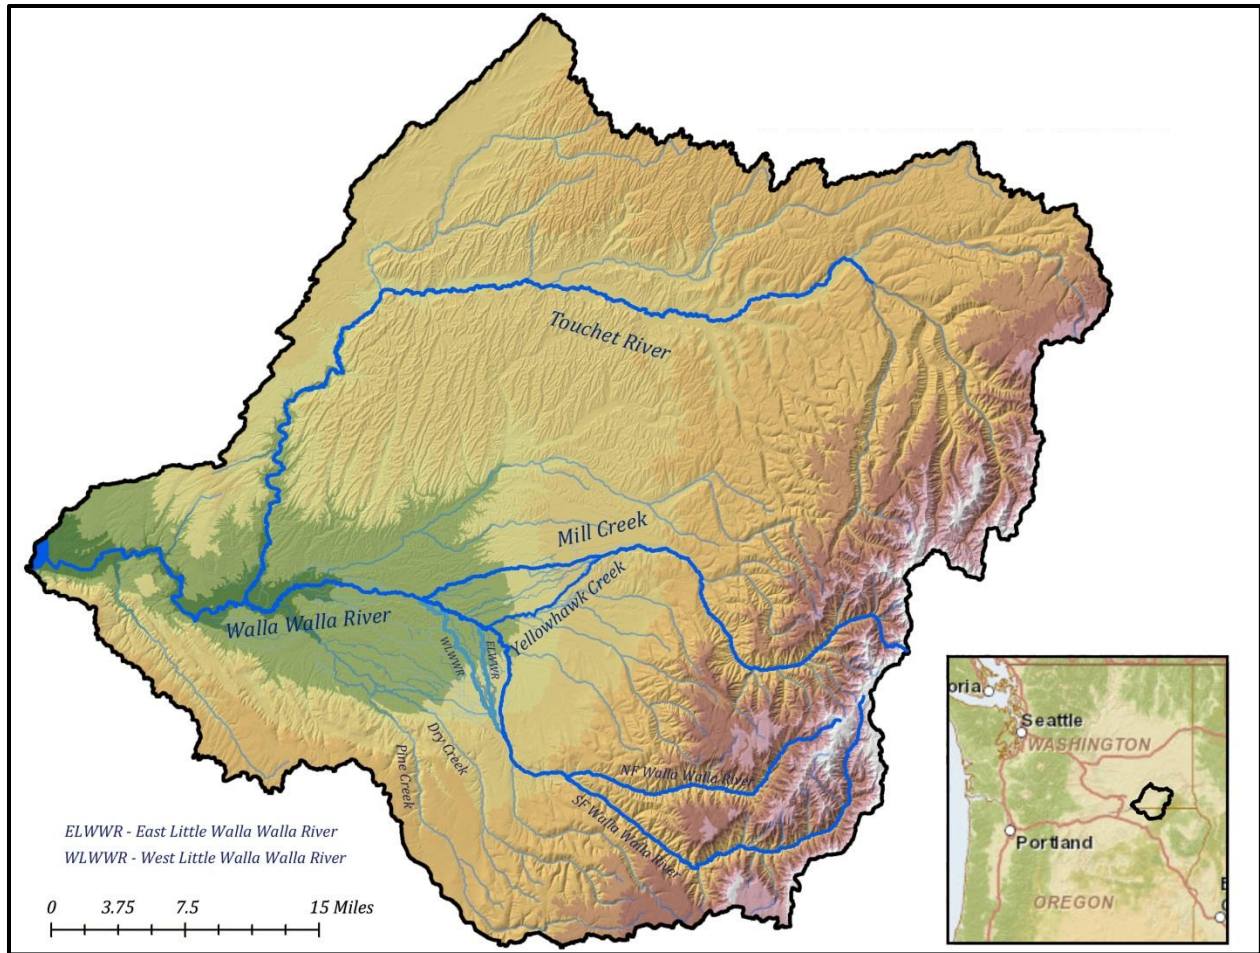


Figure 2 - The Walla Walla River and its major tributaries and distributaries.

Walla Walla Basin hydrology is largely defined by a distributary river system and an underlying alluvial aquifer system hosted by the sediments overlying basalt. Surface waters entering the Walla Walla Valley effectively change regime from steep sided canyons in the headwaters portion of the watershed to a system of distributary and coalescing streams on the central valley floor. With this, shallow groundwater systems see a regime change from localized, saturated valley deposits and confined basalt aquifers controlled by the geologic structure of the Columbia River basalt typical of the highland areas to the more widespread, thick alluvial aquifer system immediately underlying the valley floor. Depth to basalt beneath the base of the canyon floors in the highland areas upstream of the cities of Walla Walla and Milton-Freewater is typically less than 60 feet, with 30 feet more commonly observed. Beneath the central valley floor the top of basalt often is hundreds of feet deep below overlying alluvial sediments.

Groundwater in the Walla Walla Basin occurs in two principal aquifer systems: (1) the unconfined to confined suprabasalt sediment (alluvial) aquifer system and (2) the underlying confined basalt aquifer system (Newcomb, 1965). The basalt aquifer system is regional in character, having limited hydraulic connection to the Walla Walla River, primarily in the canyons of the Blue Mountains. The

alluvial aquifer system is the focus of the aquifer recharge program because of its high degree of hydraulic connection with streams on the valley floor.

The alluvial aquifer system, or alluvial aquifer, is found within a sequence of continental clastic sediments overlying the top of basalt (the Mio-Pliocene strata (upper coarse, fine and lower coarse units) and the Quaternary coarse unit). Beneath the Walla Walla Valley floor these sediments, and the alluvial aquifer system, is up to 800 feet thick. The majority of the productive portions of the alluvial aquifer system are hosted by the Mio-Pliocene coarse unit although, at least locally, it is hosted in the overlying Quaternary coarse unit. The alluvial aquifer is generally characterized as unconfined, but it does, at least locally, display evidence of confined conditions. Preferential groundwater flow within the gravel aquifer is inferred to largely reflect the distribution of coarse sedimentary strata. General groundwater flow direction is from west to east based on contoured groundwater elevations in the alluvial aquifer observed in October, 2009 (Figure 3).

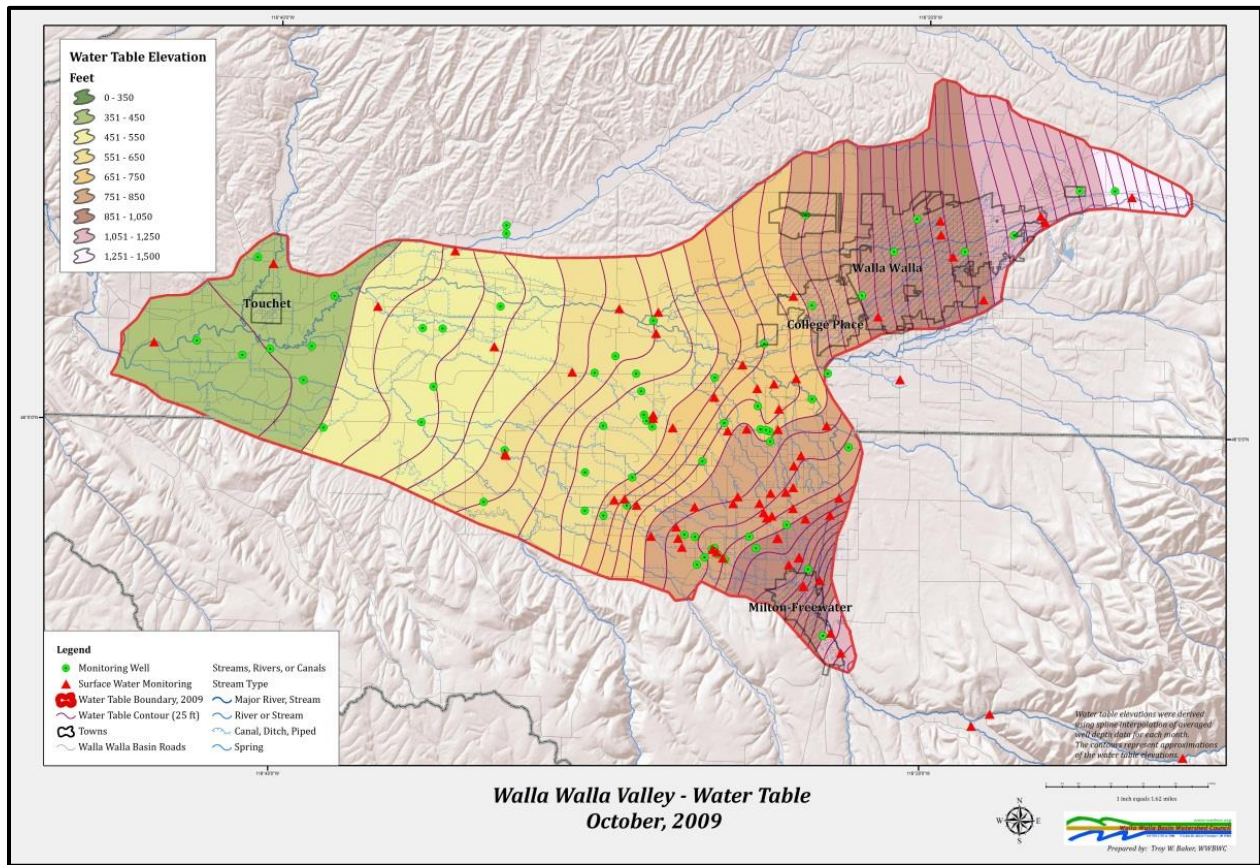


Figure 3 - Water table elevation contours for the alluvial aquifer system in October 2009.

The surficial hydrology of the Walla Walla Basin generally is defined by streams confined to steep-walled canyons in the foothills surrounding the valley, a distributary stream system as these streams exit the highlands and flow out onto the valley floor, and then, as the streams flow west, they coalesce into the main Walla Walla River channel. The distributary system formed as streams

leaving the highlands entered the valley, went from higher to lower gradient and, as a consequence, deposited coarse sediment loads and formed a series of low angle, coalescing alluvial fans. Upon the alluvial fans in and around the cities of Walla Walla and Milton-Freewater these natural distributary channels still exist in part or in whole to this day. These channels are known today as the East Little Walla Walla River, West Little Walla Walla River, Mud Creek, Yellowhawk Creek, and Garrison Creek. Prior to the development of water resources in the valley, these distributary channels, with other (un-named) channels, served as high water channels that conveyed high amounts of energy and water across the alluvial fan and away from the mainstem Walla Walla River and Mill Creek. The channels run for several miles, accumulating spring flow, before returning back to the River further down the valley (Figure 4).

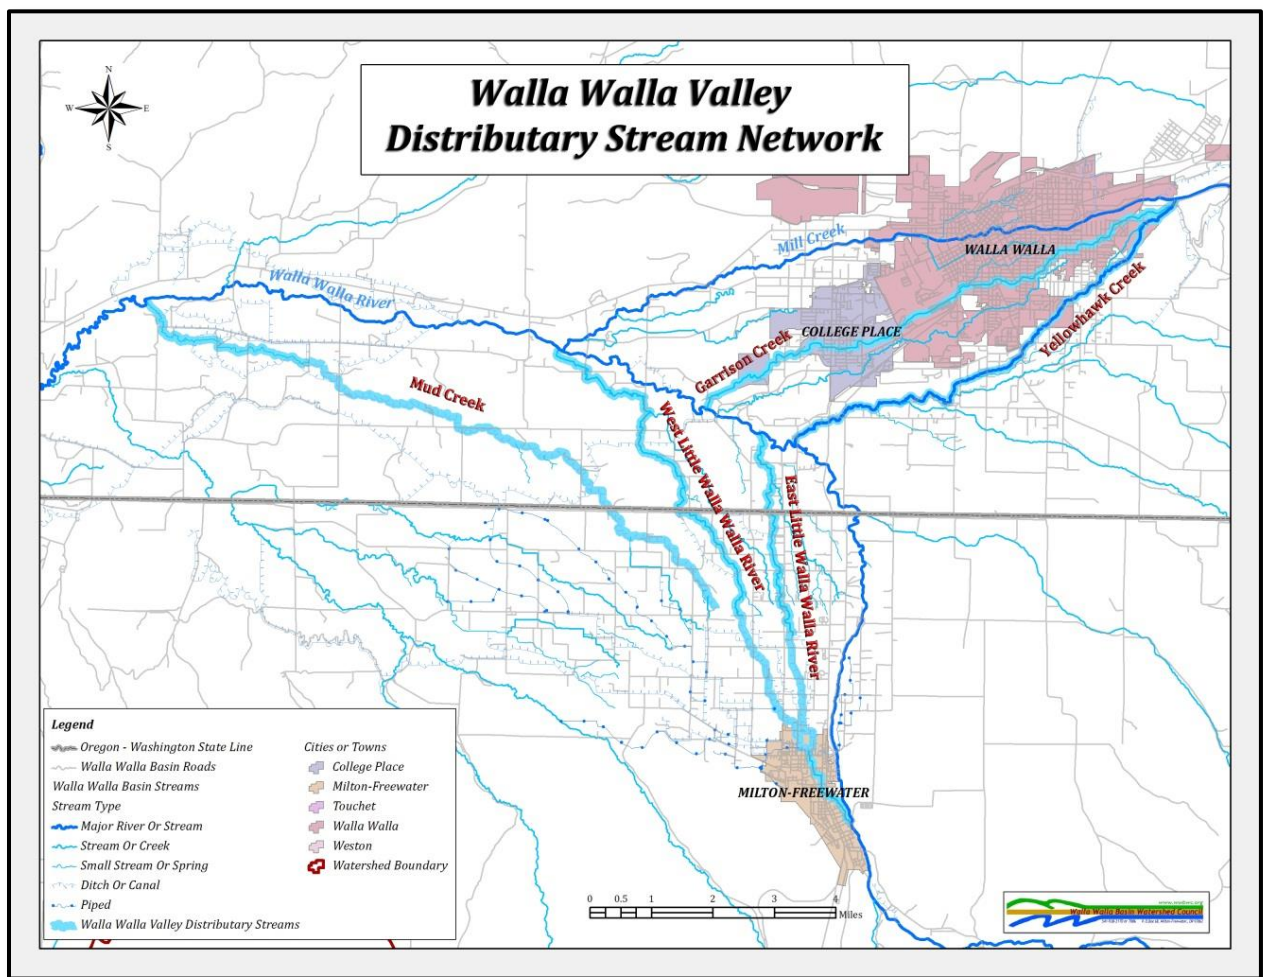


Figure 4 - Map of the distributary stream networks of the Walla Walla River and Mill Creek. Historically these stream networks conveyed winter and spring high flows across the valley’s alluvial fans allowing for reduced flood pressure on the mainstem rivers, provided off-channel habitat and provided recharge to the alluvial aquifer system.

Generally, the 'spreading out' of water across the alluvial fans via distributary channels and adjacent floodplains, coupled with the high hydraulic conductivity of the underlying coarse sediment, functions as a primary groundwater recharge mechanism for the entire alluvial aquifer. This seasonally recharged aquifer system in-turn feeds the valley's springs, spring creeks and larger streams. This cycling of surface water to groundwater recharge, followed by later discharge in springs and as stream base flow creates a delay in discharge of these waters from the valley. Depending on local conditions, this delay can range from days to months, and even years (Jiménez, 2012).

The management and development of surface water resources in the basin has led to installation of flow control devices (i.e. irrigation head gates) at the heads of the distributary channels. Over time, management of the flow within the distributary network has resulted in a less natural distribution of floodwaters during periods of high flow. Peak stream flows that would generally occur during the winter and spring no longer have free access to the distributary network and the adjacent floodplains that would provide recharge to the underlying alluvial aquifer. The current management of peak flows, the channelization of the valley's rivers and creeks and development of the alluvial aquifer as a groundwater resource has contributed substantially to declining groundwater levels in the alluvial aquifer.

The decline in alluvial aquifer water levels, coupled with the high hydraulic connectivity between surface water and alluvial groundwater, has created losing reaches along the streams and/or rivers where high seepage loss occurs and instream flow is decreased as significant volumes of surface water drain to the underlying alluvial aquifer (Figure 5).

In recent years, the listing of steelhead and bull trout as threatened under the Endangered Species Act and the reintroduction of spring chinook salmon within the Walla Walla watershed, has led to out-of-court agreements between irrigators and Federal fishery agencies to enhance instream flows. As a result of these agreements, local irrigators are leaving a portion of their legal water rights instream as bypass water year round. For example, per civil agreement, Hudson Bay District Improvement Company and Walla Walla River Irrigation District irrigators leave 25-27 cfs instream (bypass) throughout the year. However, depending on the water-year and a number of other factors, it is not unusual to have a significant portion (40-50%) of the bypass water seep into the underlying alluvial aquifer before it reaches the WA/OR border.

Creeks across the valley are sourced by springs discharging from the alluvial aquifer have also seen declines in flow since the earliest hydrogeologic studies were conducted by Piper (acting on behalf of the US Supreme Court) in the 1930s, Newcomb in the 1960s and Barker and MacNish in the 1970s. Water level declines in the alluvial aquifer since the 1930s and 1940s (Figures 6 & 7) are consistent with the general decline in discharge from the related springs (Figure 8). These trends lead one to conclude that over the past several decades there has been a general decrease in groundwater contributions to baseflow of the Walla Walla River and other surface bodies during critical low-flow periods. This loss of cooler groundwater baseflow to streams affects not only the amount of flow in the river but also leads to increased surface water temperature during the low-flow periods, affecting aquatic species and the stream ecosystem.

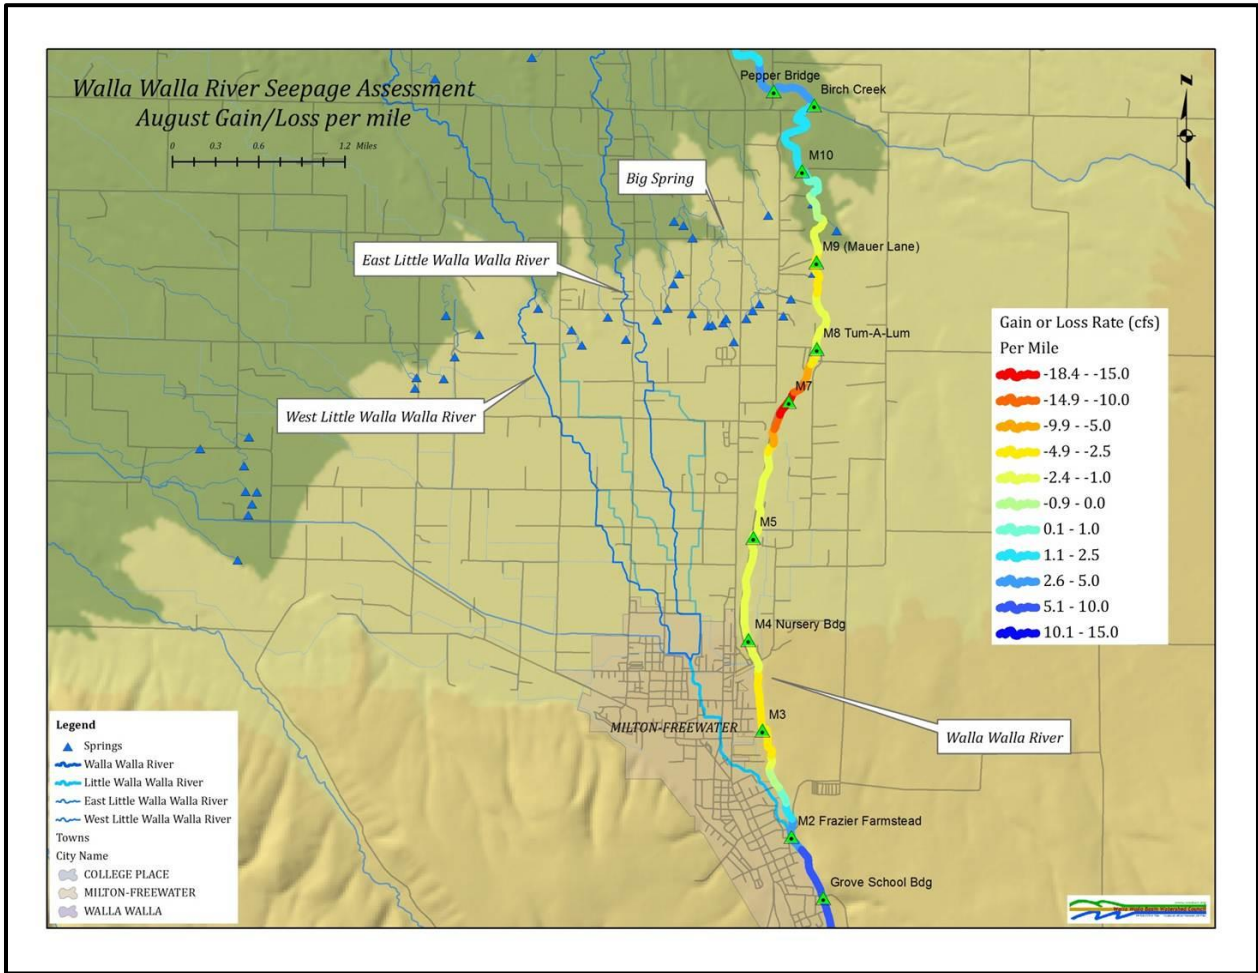


Figure 5 - Results from the water budget analysis of the Walla Walla River in August 2009. Color indicates a given reach as either gaining or losing. Gains (positive values) indicate groundwater discharging to the river and losses (negative values) indicate surface water seeping into the ground (see WWBWC, 2012 for details).

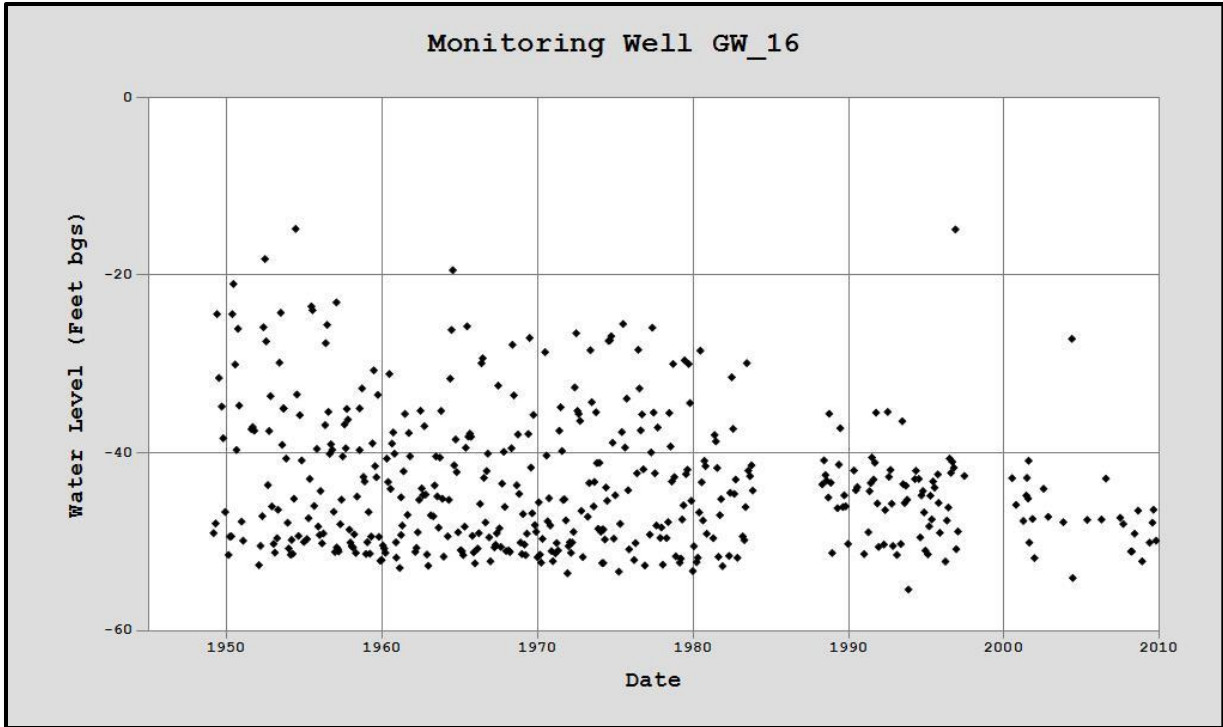


Figure 6 - Hydrograph for Monitoring Well GW\_16 showing the long-term decline in the alluvial aquifer system in the Walla Walla basin.

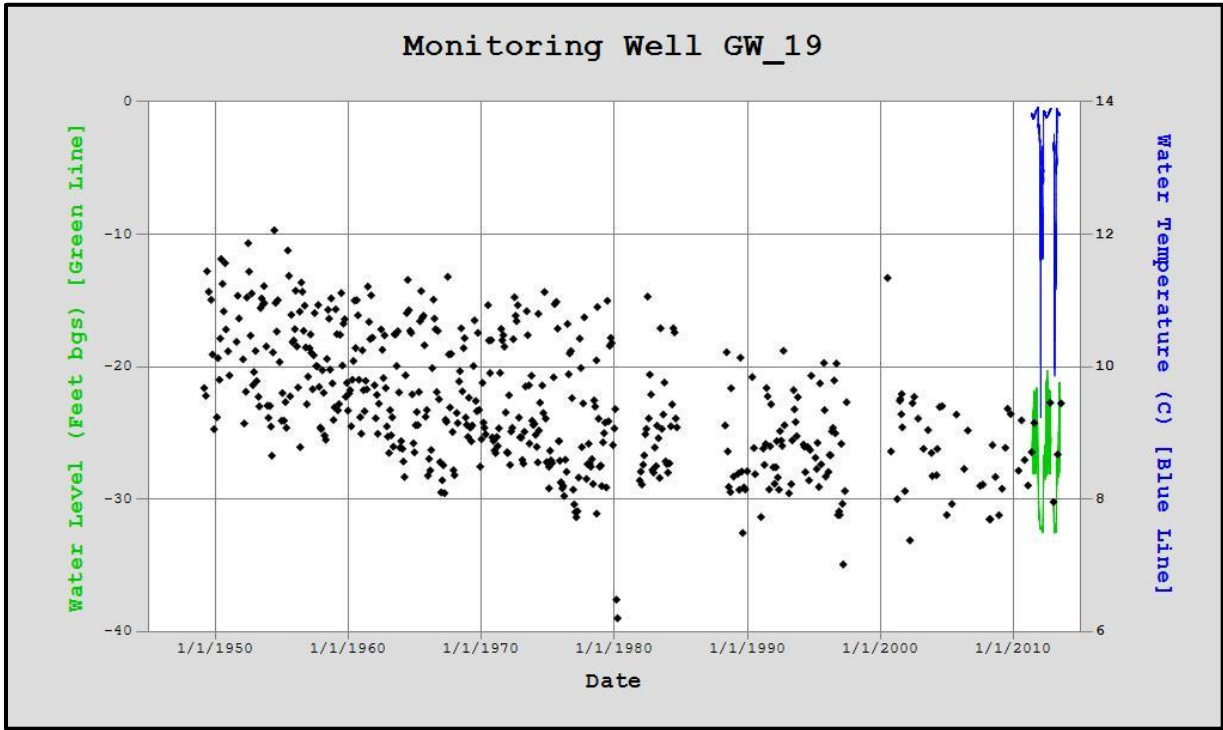


Figure 7 - Hydrograph for Monitoring Well GW\_19 showing the long-term decline in the alluvial aquifer system in the Walla Walla basin.

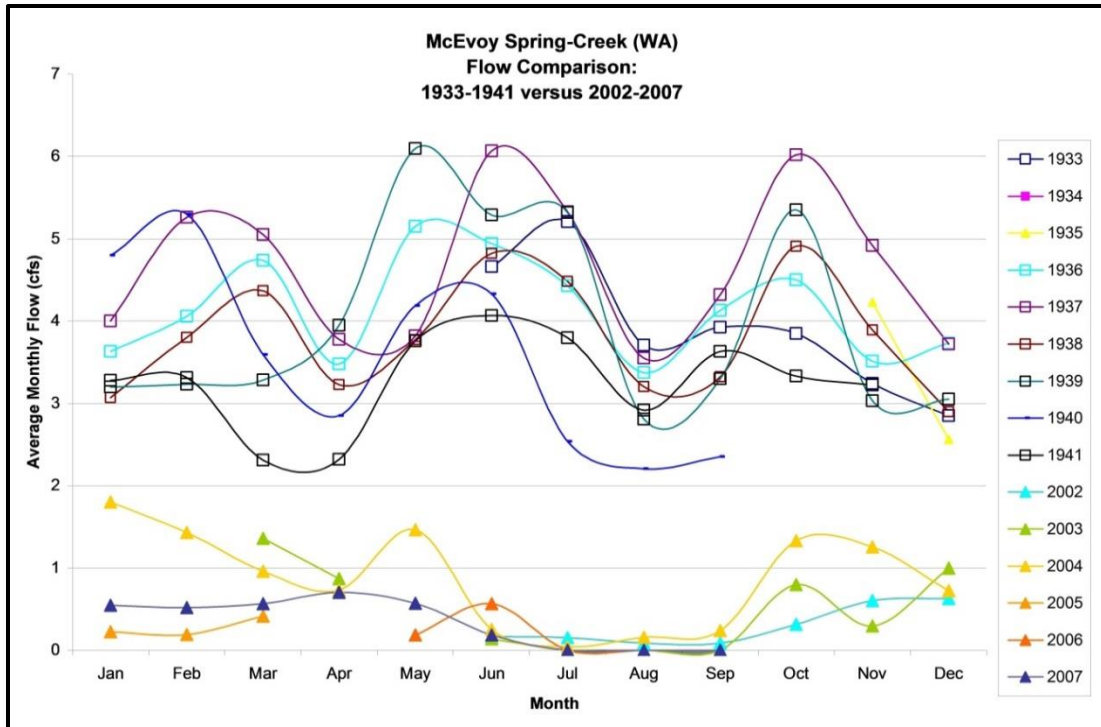


Figure 8 - Hydrograph for McEvoy Spring Creek located just north of the WA-OR state line. Hydrograph shows the decline in spring performance over the last 80 years.

## AQUIFER RECHARGE SITE INFRASTRUCTURE DESIGN AND OPERATION

Three AR sites were in operation during WY2012 as part of the WWBWC AR program. The Trumbull and Anspach AR sites were constructed in fall 2012 and operated for the first time in WY2012 (Figure 9). Each sites design, construction and operational capacity is provided below and design drawings for each site are included as Appendix D.

### JOHNSON AQUIFER RECHARGE SITE

The Johnson site (Figure 9), formerly known as the Hudson Bay site and/or the Hulette Johnson site, has been operating since 2004. The Johnson site has been developed in three phases since pilot testing operations began in 2004 (Figure 10). The initial 2 phases are described extensively in the final report for the first limited license (WWBWC, 2010). The site currently has the capacity for approximately 16 to 17 cfs of infiltration into approximately 3 acres of infiltration basins (spreading basins) and 3 infiltration galleries (Figure 11). For additional details on the Johnson site please see WWBWC, 2010.

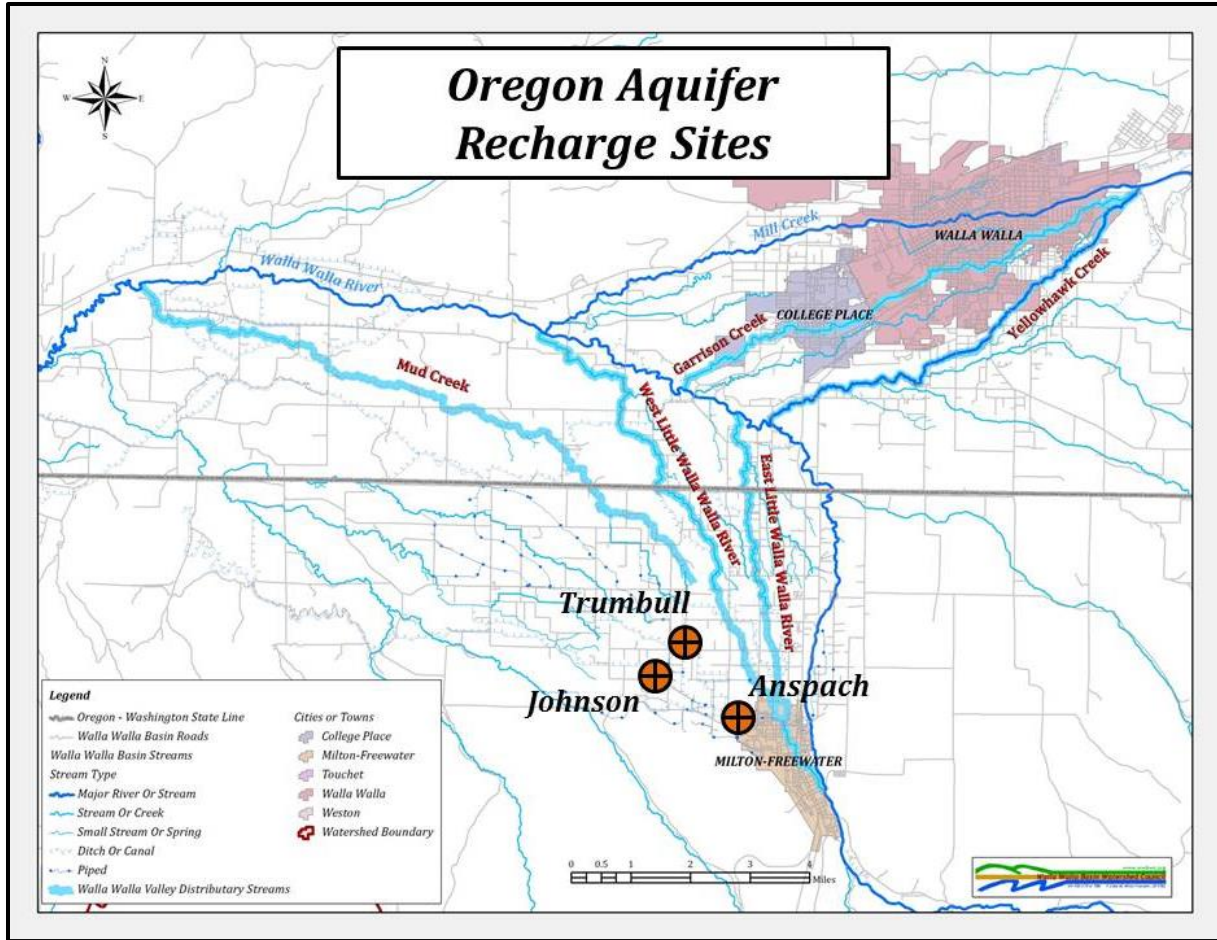


Figure 9 - Active aquifer recharge sites in the Oregon portion of the Walla Walla Basin.

Table 1. - Minimum instream flow values, measured below Milton-Freewater, OR that must be met before water can be diverted for OR aquifer recharge sites under Limited License LL-1189 & LL-1433.

| <b>Minimum Instream Flow Values for Limited License LL-1189 and LL-1433</b> |                       |                       |
|---|-----------------------|-----------------------|
| Nov 1st thru Nov 30th   | Dec 1st thru Jan 31st | Feb 1st thru May 15th |
| 64 cfs  | 95 cfs                | 150 cfs               |



## SPREADING BASINS

The Johnson site was originally constructed with three spreading basins (Figure 10). The three original basins were constructed in the winter/spring of 2004. These basins were increased in size during 2005 to almost triple their original area. Phase II included the addition of a hydraulically upgradient spreading basin in 2006 and four infiltration galleries in the winter of 2009. Water for the new up-gradient basin was fed through the original diversion with water being “pushed” into it from the first basin. Phase III included the addition of four additional basins on the lower end of the property, a new out-flow measurement weir, a new pipeline that feed water to each individual basin, a telemetry system to remotely monitor site operation and an alternate method to deliver water to the up-gradient basin. During construction of the downgradient spreading basins, the largest basin described in the preliminary design was modified because the southern half subsurface material consisted of finer-grained sand/silt while the northern half consisted of coarser gravel/cobbles. On the basis of the encountered heterogeneous conditions, it was decided to divide the downgradient basin into two basins based upon the sediment types (Figure 10).

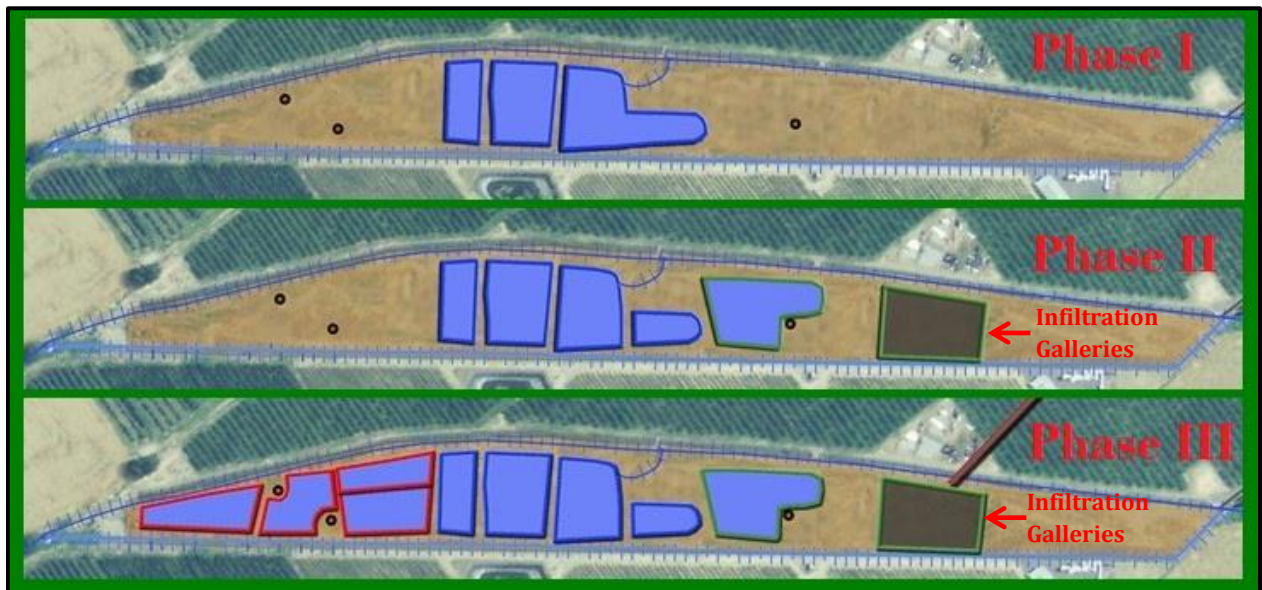


Figure 10 - The Johnson site's spreading basins showing the three phases of construction. Phase I was conducted in 2004-2005, Phase II in 2006-2009 and Phase III in 2010-2011. See Appendix D for as built designs.



Figure 11 - Aerial photo of the Johnson site from 2013 showing the current configuration of the site with 10 spreading basins and 3 active infiltration galleries (between the spreading basins and the pile of fill).

## INFILTRATION GALLERIES

During Phase II, four infiltration galleries (IG) were installed at the Johnson site for testing purposes. IG #1 was constructed of corrugated 4" perforated pipe, IG #2 was constructed of 4" drain field pipe, IG #3 was 4" drain field pipe inside Stormtech stormwater chambers and IG #4 was drain field pipe inside Atlantis stormwater devices. During the first season of testing IG #1 clogged up and has not been utilized since. IG #2, IG #3 and IG #4 have all continued to function and have been operated during each recharge season. The four different infiltration gallery designs were installed to create a cost-benefit analysis of the different design types and to determine each design's longevity.



Figure 12 - Photograph of infiltration gallery #2 (IG2) being installed at the Johnson Aquifer Recharge site. IG2 is 4" perforated drain field pipe installed over washed gravel and buried in ~1 foot of washed gravel with geo-textile fabric on top of the gravel. See Appendix D for designs.



Figure 13 - Photograph of infiltration gallery #3 (IG3) at the Johnson Aquifer Recharge site. IG3 is 4" perforated drain field pipe installed within Stormtech stormwater chambers (yellow covers) over washed gravel and buried in ~2 foot of washed gravel with geo-textile fabric on top of the gravel. See Appendix D for designs.

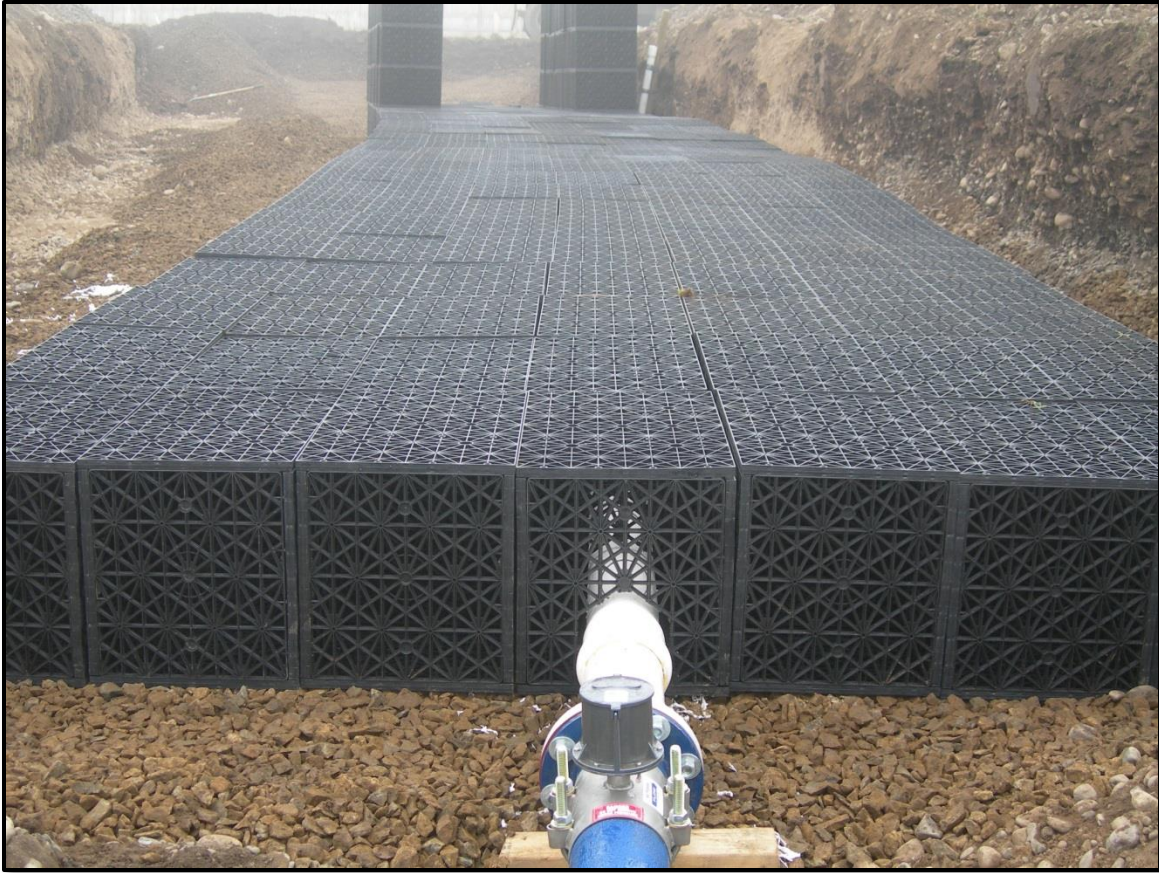


Figure 14 - Photograph of infiltration gallery #4 (IG4) at the Johnson AR site. IG4 is a single 4" perforated drain field pipe installed within Atlantis stormwater devices (black milk crates) over washed gravel and buried in ~2 foot of washed gravel with geo-textile fabric on top of the gravel. See Appendix D for designs.

### **TRUMBULL AQUIFER RECHARGE SITE**

The Trumbull AR site (Trumbull site) was constructed in October 2012 using a combination of Bonneville Power Administration (BPA) and Oregon Watershed Enhancement Board (OWEB) funding. The site consists of three 8" perforated pipes extending approximately 300 feet each in length from the source water discharge and inline flow meter (Figure 15). These pipes are buried 6 feet under the ground with approximately 1-2 foot of cleaned gravel under them and approximately 0.5-1 feet of cleaned gravel on top of them (See Appendix D for complete designs). Recharge water is delivered down the HBDIC system. The Trumbull site's water source is at the structure that splits the HBDIC canal into the Hyline pipeline and the Richardz ditch. The site has its own turnout and valve so it can operate independent of the ditch or pipeline. The site was designed to operate at a recharge rate of between 2 to 3 cfs. The site was operated for a short duration during the end of the 2012-2013 recharge season at an average rate of slightly more than 2 cfs.



Figure 15 - The Trumbull Aquifer Recharge site under construction in October 2012. This recharge site utilizes 8" perforated pipes instead of the 4" pipes used at the Johnson site. The site is approximately 300 feet long with three 8" pipes running the entire length. See Appendix D for designs.

### ANSPACH AQUIFER RECHARGE SITE

The Anspach AR site (Anspach site) was constructed in October 2012 using a combination of BPA and OWEB funding. The site consists of 10 4" perforated drain field pipes extending approximately 200 feet each from the source water manifold (Figure 16). These pipes are buried 6 to 7 feet under the ground with approximately 1 to 2 foot of cleaned gravel under them and approximately 0.5 to 1 feet of cleaned gravel on top of them (See Appendix D for complete designs). Water for this site is delivered down the HBDIC's White Ditch and then turned into a private pipeline/ditch. The Anspach site's turnout and valve are situated along this private ditch (Figure 17). The site was designed to operate at a recharge rate of approximately 1 cfs. The site was operated for a short duration during WY2012 near the end of water availability and approximately 0.50 cfs of recharge was applied. The lower than expected recharge rate was due to limitations in the delivery capacity of the private ditch to convey more water. In addition, the recharge site is located below other users on the private ditch/pipeline and is thus influenced by their usage.



Figure 16 - The Anspach Aquifer Recharge site during construction in October 2012. This recharge site utilizes 10 4" perforated pipes that run approximately 200 feet. See Appendix D for designs.



Figure 17 - The turnout structure for the Anspach Aquifer Recharge site. The structure was built by Custom Technology Co. Inc. based in Yakima, WA. The 8" pipe emerges from a flange on the far side of the structure after the water has passed through a 0.062" perforated punch screen. The screen is removable for cleaning purposes. See Appendix D for designs.

## **MODIFICATIONS TO AR OPERATIONS UNDER LIMITED LICENSE 1433**

With the proposed inclusion of additional AR sites within the Oregon portion of the Walla Walla Basin, a new Limited License was required in order to allow delivery of water for recharge to the proposed sites. As the new sites were being developed, the WWBWC worked with OWRD to discuss the development of new limited license(s). It was decided upon that instead of following the example of the Johnson site where each individual site had its own limited license the new sites (now a total of 7 seven sites) would be grouped together into a single limited license application.

By combining the AR sites under one Limited License, the WWBWC could combine the individual monitoring plans into one plan by looking at the multiple AR sites as a system. In addition to working with OWRD on this approach, WWBWC staff approached the Oregon Department of Environmental Quality (ODEQ) regarding a programmatic approach to water quality and water level monitoring under the new limited license. Previously, the monitoring plan for the Johnson site focused on source water, up-gradient groundwater and down-gradient groundwater. Given that the analytical lab costs and labor associated with sampling at three groundwater locations at each aquifer recharge site would become very expensive as the program grew, combining the sites under one plan and viewing them as a system was a reasonable approach.

A new programmatic approach was approved by OWRD and ODEQ that involves monitoring the aquifer recharge sites as a network of sites working together instead of individual sites operating independently. Thus, the new monitoring plan samples source water at three locations to ensure source water quality is not degraded as it moves through the HBDIC system, 1-2 up-gradient

groundwater locations (of the whole network), 4-5 groundwater locations along the groundwater flow path in the central portion of the project site and 1-2 down-gradient groundwater locations (See Appendices B & C for Limited License LL-1433 and monitoring plan details).

Similar to the LL-1189, the water for all of the sites included in the new limited license would be provided via the HBDIC diversion system. Under LL-1433 up to 45 cfs (less than the 50 cfs allowed under LL-1189) could be diverted from the Walla Walla River at Cemetery Bridge in Milton-Freewater, OR. The new limited license allows for flexibility in how the water is divided among the sites rather than restricting each site to a pre-determined amount of water. This new condition allows WWBWC staff to adaptively manage the recharge among the seven sites to maximize the amount of water recharged to the alluvial aquifer.

Specifically, the 45 cfs allowed can be distributed in a flexible manner to the 7 aquifer recharge sites (3 current and 4 proposed). For example, site A is designed to operate at 3 cfs and site B is designed to operate at 5 cfs. After sites A and B are constructed and operating we find out that site A actually can operate at 5 cfs but site B can only operate at 3 cfs. The limited license allows the flexibility to increase site A's rate and decrease site B's rate (assuming the total diverted rate is less than or equal to 45 cfs). This flexibility to fully utilize the 45 cfs of available source water optimizes the operation of the recharge basin network by preventing differences between estimated rates during aquifer recharge site design and actual site recharge capacities to limit an aquifer recharge site's operating rate.

## **WY 2013 RECHARGE SYSTEM MONITORING**

This section describes the monitoring of diversion system, individual site AR operations and water level monitoring conducted at each individual site. The total amount of water diverted into the HBDIC system during WY 2013 was 5,826.35 acre-feet. A total of 4,651.35 acre-feet were applied in total at the three sites. The individual operations at each site are discussed in detail below. Well logs for monitoring wells are included in Appendix F.

### **Diversion System**

LL- 1433 allows for up to 45 cubic feet per second to be diverted from the Walla Walla River for the purpose of testing artificial recharge. Per the Conditions of the LL-1189 and LL-1433, a minimum flow amount is required to remain in the Tum a Lum reach of the Walla Walla River depending on the time of year (Table 1). WWBWC coordinated with the OWRD District 5 watermaster to ensure that this condition of LL-1433 was met during recharge operations in WY 2013.

On the basis of observations WY 2013 operations, not all of the water diverted from the Walla Walla River at the HBDIC diversion reaches the aquifer recharge sites due to seepage through unlined portions of the HBDIC canal system and/or evaporative losses. To estimate the losses during diversion, total volumes at the Little Walla Walla Diversion stream gage (during periods when only recharge water was being diverted from the Walla Walla River) were compared to the volumes measured at the recharge sites. Ditch seepage was estimated by subtracting the water delivered to



the recharge sites from the water diverted from the Walla Walla River with the difference assumed to be the amount of ditch seepage. The WWBWC has calculated the amount of ditch seepage between November 1, 2012 to May 15, 2013 to be 1,175 acre-feet or approximately 7 acre-feet/day based on a 168 day recharge period in WY 2013.

A total of 4,651.35 acre-feet were applied in total at the three sites. The individual operations at each site are discussed in detail below.

### JOHNSON RECHARGE SITE

The Johnson site had its best year for recharge since it was constructed in 2004. The Johnson site ran for 168 days during the WY 2013 recharge season. The site started receiving recharge on November 1<sup>st</sup>, 2012 and continued to receive recharge until February 1<sup>st</sup>, 2013 when the Little Walla Walla Diversion was shut down for yearly maintenance on the fish screens. Recharge operations resumed on March 1<sup>st</sup>, 2013 and terminated May 15<sup>th</sup>, 2013, as required by LL-1433. The Johnson site received a total of 4,555.5 acre-feet for recharge in total at an average rate of 27 acre-feet per day (Figures 18-20). The total calculated volume includes the 10 spreading basins (3,972.1 acre-feet) and the 2 active infiltration galleries (583.4 acre-feet).

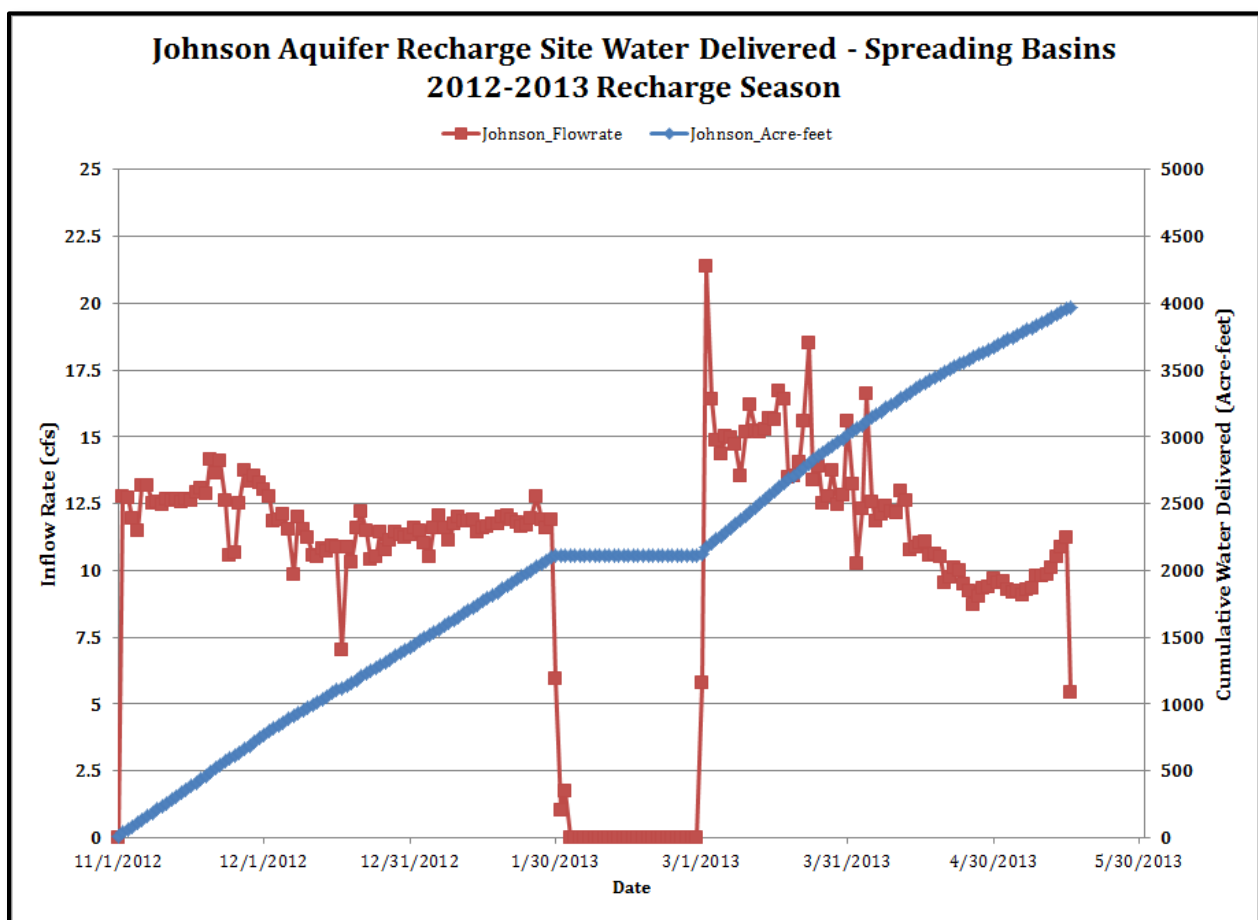


Figure 18 - Hydrograph for the Johnson site showing inflow rates and cumulative water delivered to the site's spreading basins.

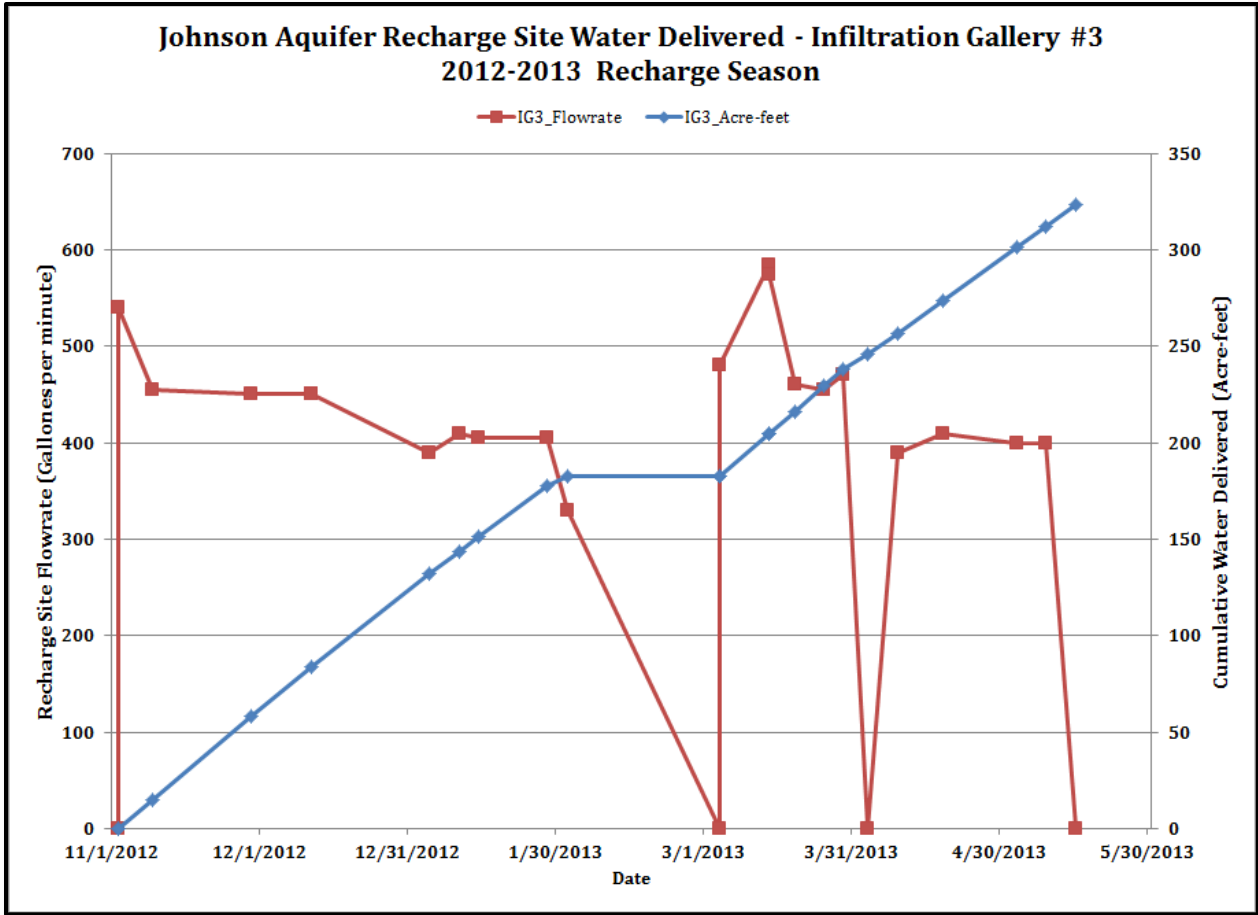


Figure 19 - Hydrograph for the Johnson site showing inflow rates and cumulative water delivered to infiltration gallery #3.

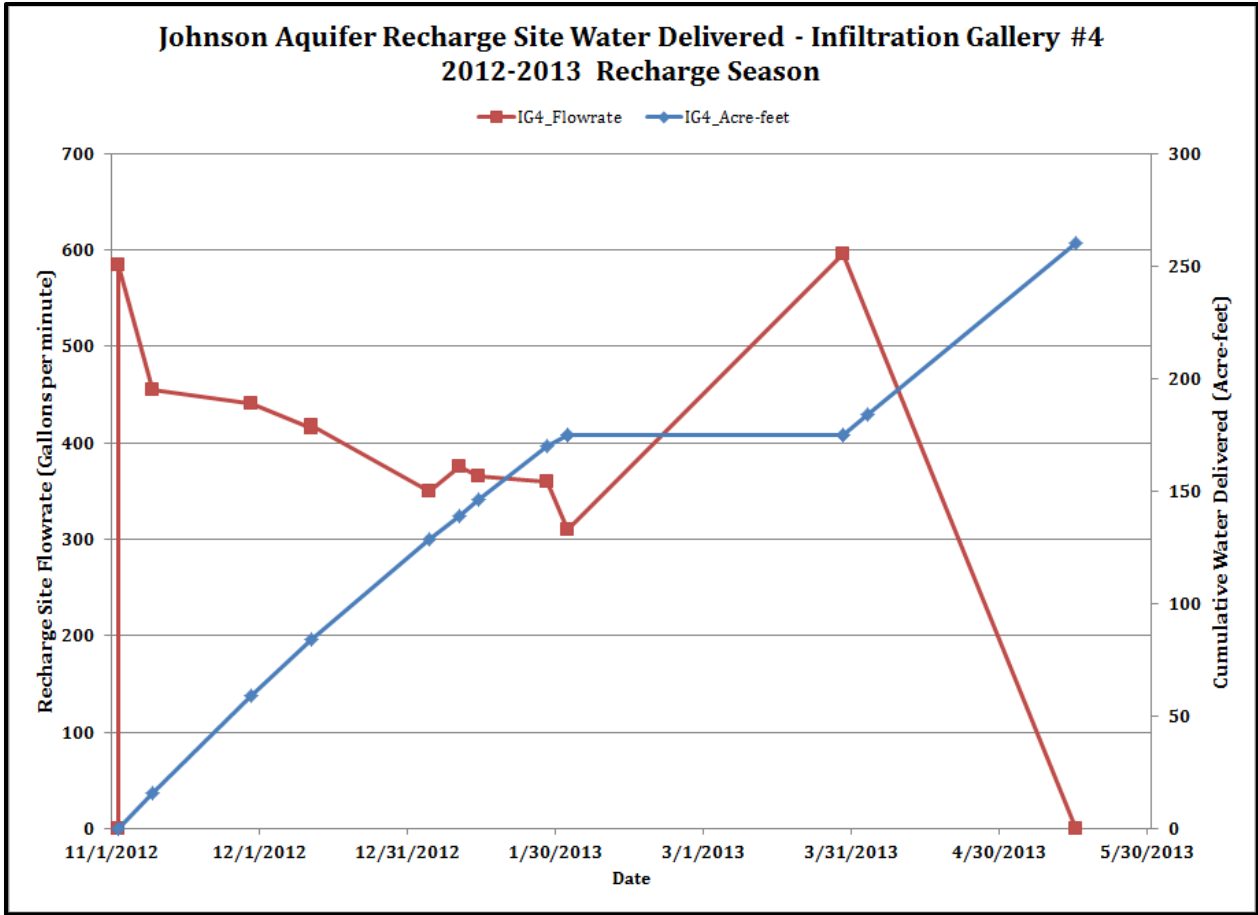


Figure 20 - Hydrograph for the Johnson Aquifer Recharge site showing inflow rates and cumulative water delivered to infiltration gallery #4.

**ALLUVIAL AQUIFER WELL RESPONSES**

Monitoring wells (Figure 21-28) near the Johnson site were all observed to have a distinct increase in water levels shortly after operations were begun at the site (green dotted lines). As would be expected, monitoring wells closer to the spreading basins and infiltration galleries (GW\_45-48) respond more rapidly and with greater magnitude increases and decreases in water levels than those located further down-gradient (GW\_35 & GW\_118). The up-gradient well, GW\_40, also showed a strong response to recharge operations with water levels increasing rapidly during recharge events and decreasing after recharge stops.

Water levels in GW\_45, GW\_46 and GW\_47 were observed to decrease approximately 30 feet after recharge was interrupted from February 1 to March 1, 2013. The rate of decrease was slow relative to the response of the wells at the beginning of recharge, suggesting that groundwater mounding was occurring beneath the site, which is consistent with the observed hydraulic response in the alluvial monitoring well network. Seasonal groundwater fluctuation at the site is typically 15 feet (or more), with the lowest groundwater levels occurring in March and October in a typical year. A

slight declining trend is still observed in the groundwater levels for wells GW\_40, GW\_45-48, and GW\_35 and GW118 during AR activities; however, the rate of decline is lower than that observed in previous years from November to March. The influence of the irrigation ditch operation and irrigation activities are apparent in the water level response at the Johnson site between March and October 2013 (Figures 21-28); however, the approximately 5 foot increase in water levels in alluvial aquifer wells between October 1, 2012 to October, 1 2013 suggest that additional water was stored in the alluvial aquifer in WY 2013.

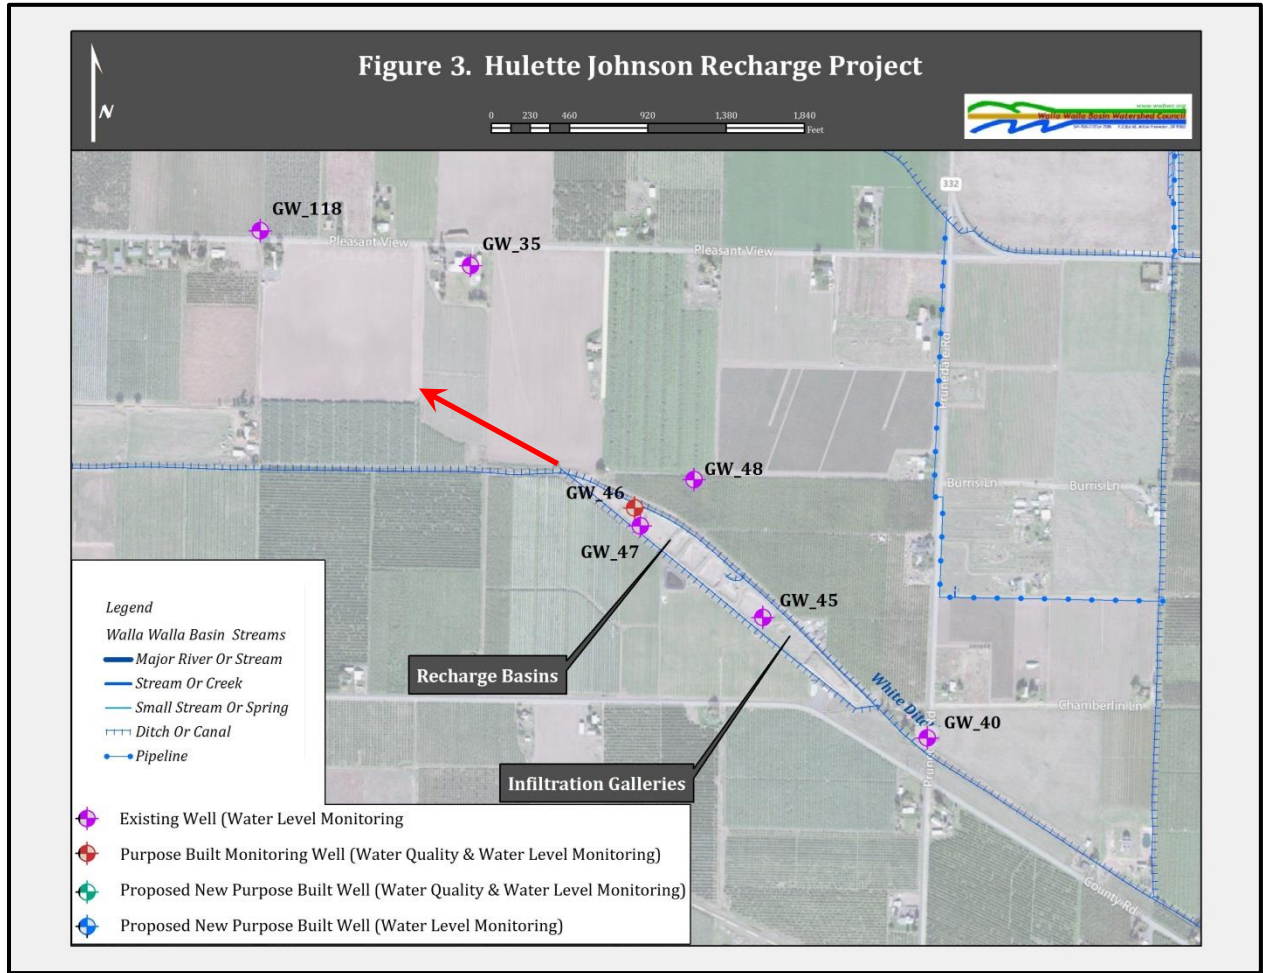


Figure 21 - Monitoring well locations for the Johnson Aquifer Recharge site. Red arrow indicates generalized groundwater flow direction.

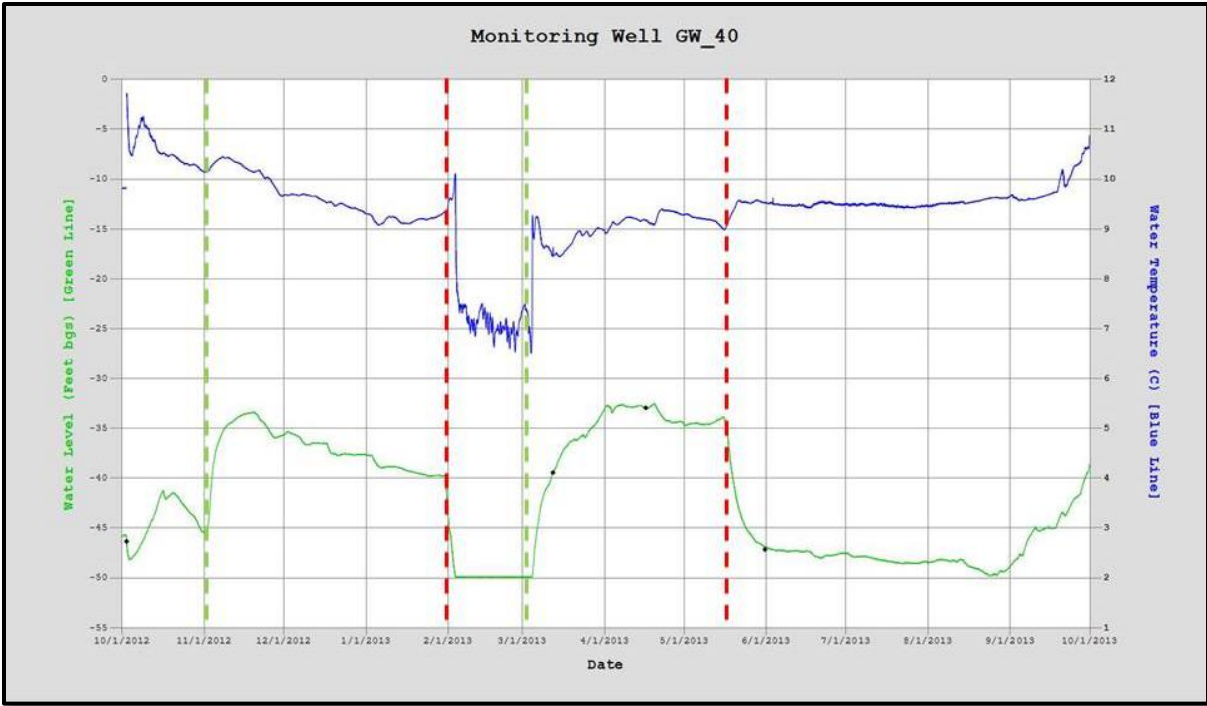


Figure 22 - Hydrograph for monitoring well GW\_40. Green dotted lines indicate start of recharge operations and red dotted lines indicate end of recharge operations.

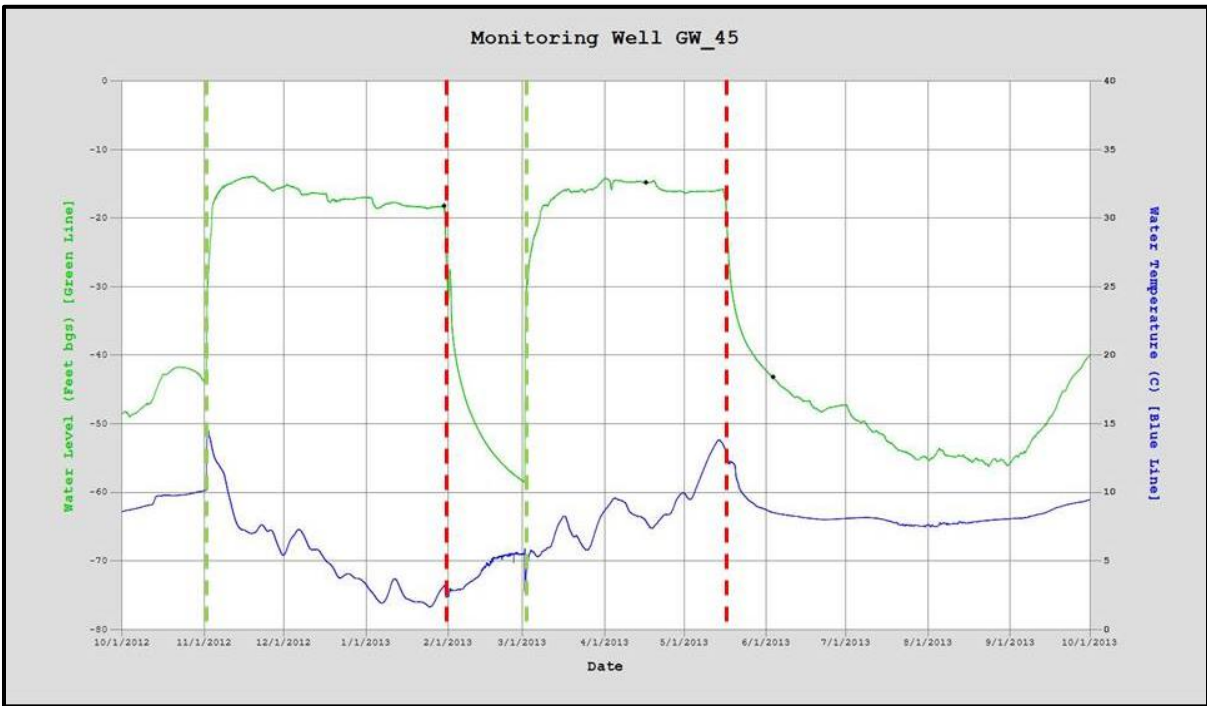


Figure 23 - Hydrograph for monitoring well GW\_45. Green dotted lines indicate start of recharge operations and red dotted lines indicate end of recharge operations.

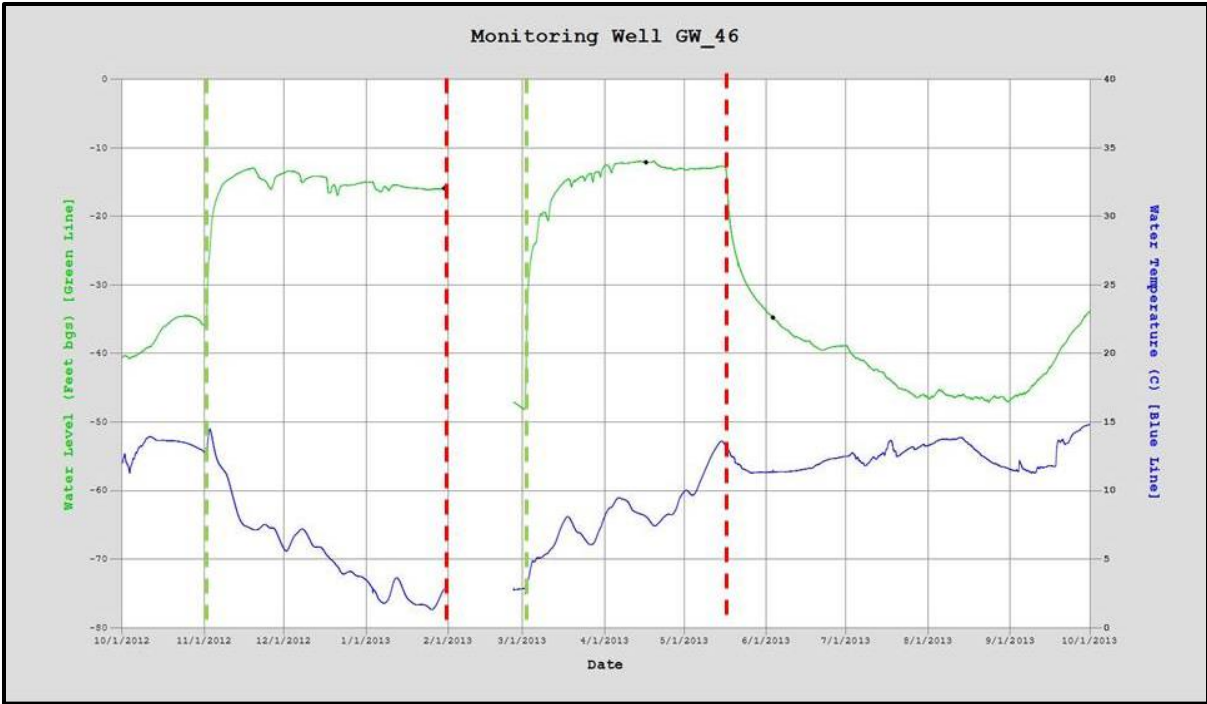


Figure 24 - Hydrograph for monitoring well GW\_46. Green dotted lines indicate start of recharge operations and red dotted lines indicate end of recharge operations.

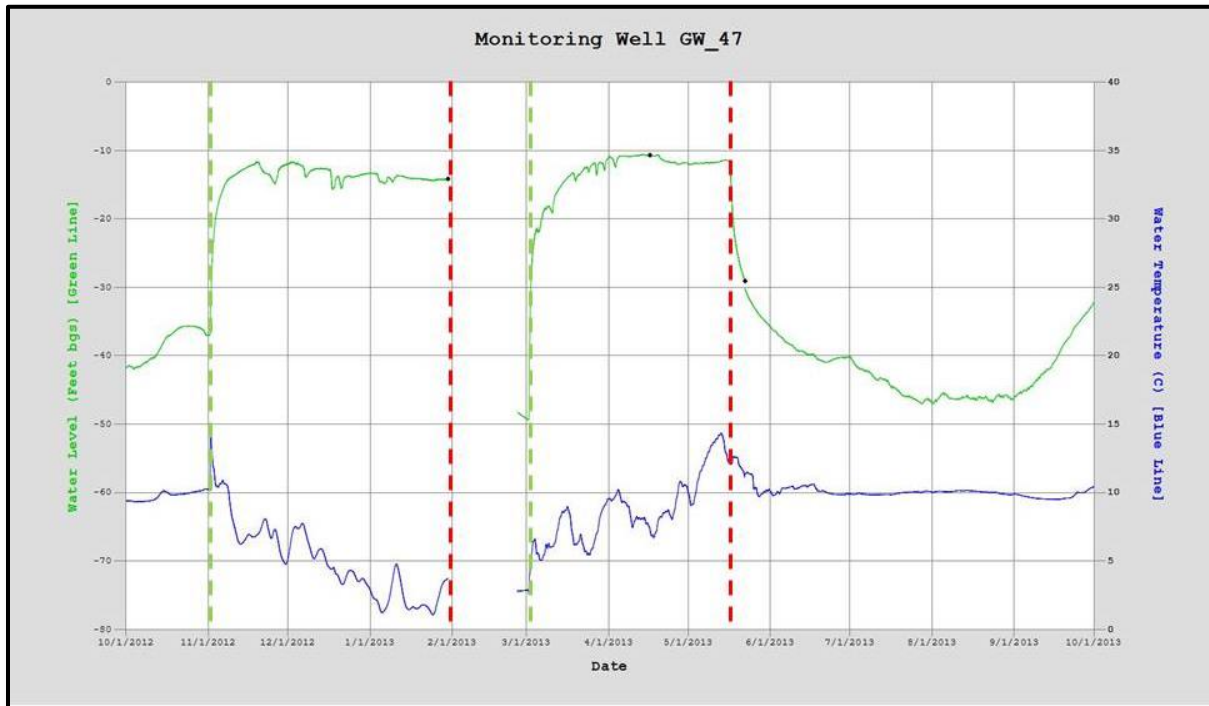


Figure 25 - Hydrograph for monitoring well GW\_47. Green dotted lines indicate start of recharge operations and red dotted lines indicate end of recharge operations.

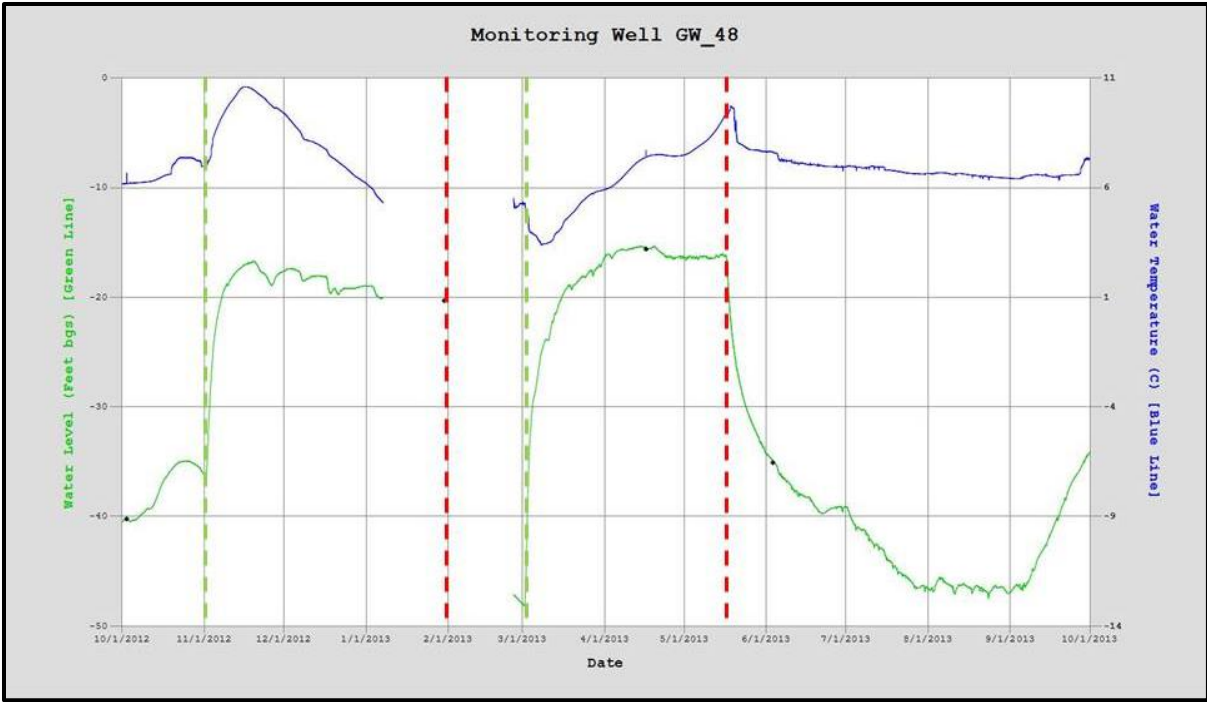


Figure 26 - Hydrograph for monitoring well GW\_48. Green dotted lines indicate start of recharge operations and red dotted lines indicate end of recharge operations.

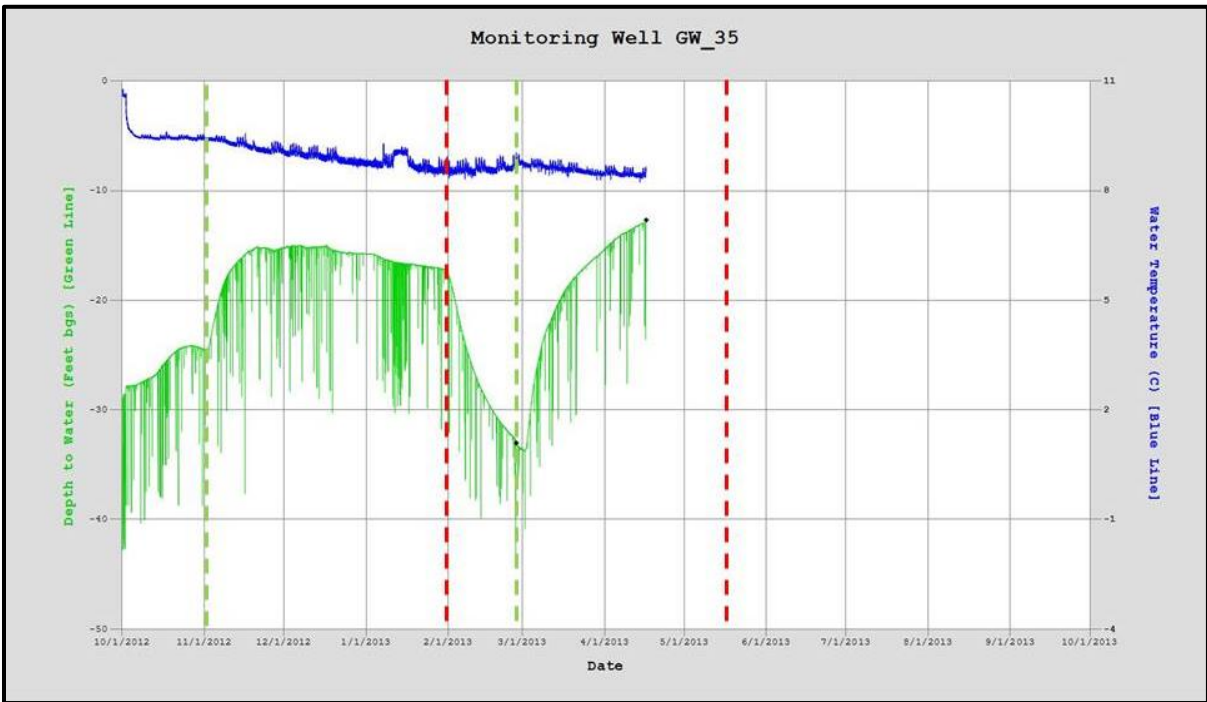


Figure 27 - Hydrograph for monitoring well GW\_35. Green dotted lines indicate start of recharge operations and red dotted lines indicate end of recharge operations. Logger batteries died in mid-April.



Figure 28 - Hydrograph for monitoring well GW\_118. Green dotted lines indicate start of recharge operations and red dotted lines indicate end of recharge operations.



## TRUMBULL SITE

The Trumbull site was constructed during the fall of 2012. The site was put into operation on April 25<sup>th</sup>, 2013, shortly after completion of 2 new monitoring wells in accordance with the approved monitoring plan and OWRD monitoring well construction standards (See Appendix C). The site was operated for 21 days at a maximum rate of approximately 970 gallons per minute and approximately 84.28 acre-feet (4.01 acre-feet/day) were recharged to the alluvial aquifer (Figure 29).

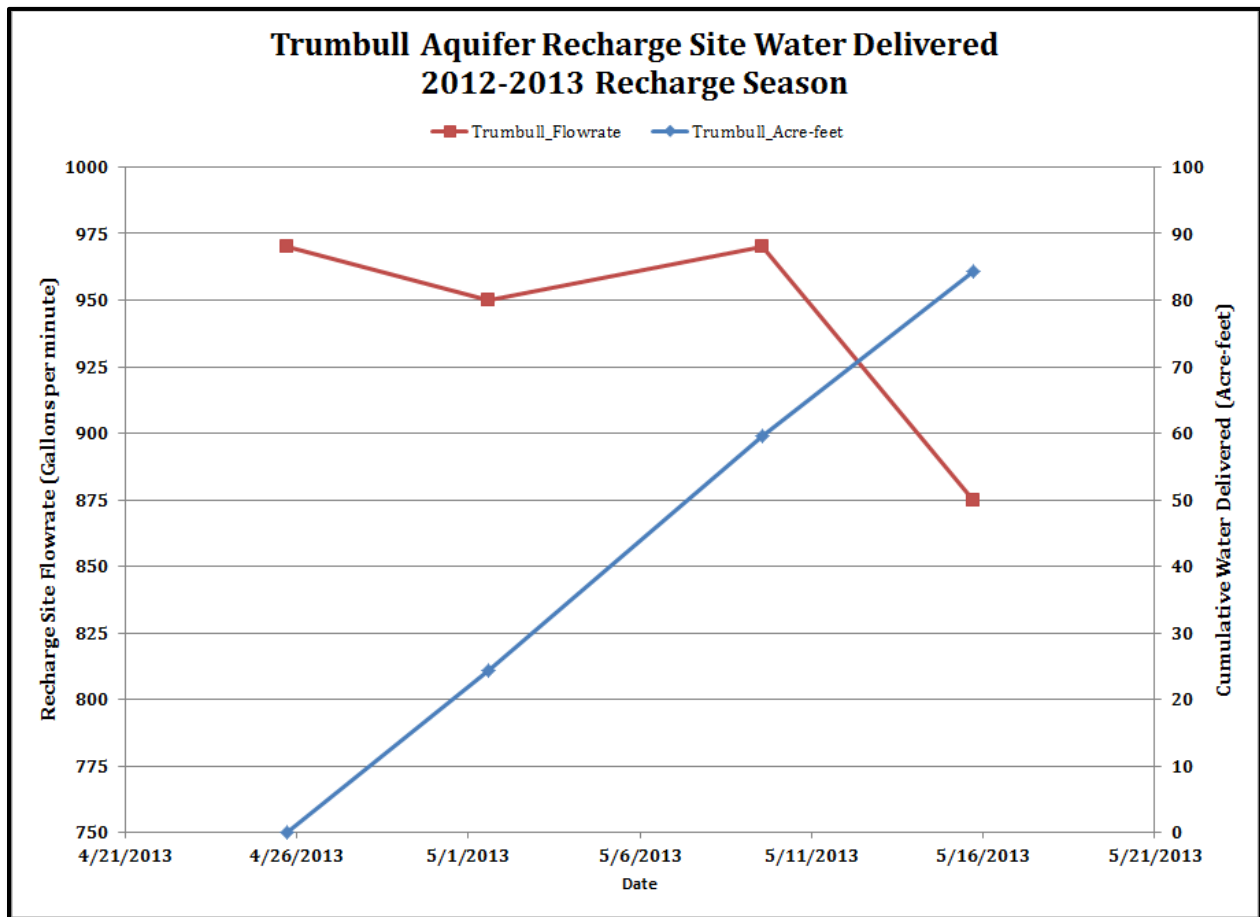


Figure 29 - Trumbull Aquifer Recharge site inflow rates and cumulative water delivered.

## ALLUVIAL AQUIFER RESPONSE

The up-gradient monitoring well, GW\_117, did not exhibit a distinct response to aquifer recharge operations while the down-gradient, GW\_142, monitoring well was observed to show a rise in water level interpreted to be a response to aquifer recharge operations (Figures 30-32). The up-gradient well was observed to respond to irrigation activities that start in early-mid March and continue through October. The down-gradient monitoring well GW\_142 was constructed just prior to the start of recharge operations at Trumbull; therefore, no pre-operation data are available for

this well. In July the water levels continued to drop until they drop below the screened interval of well GW-142.

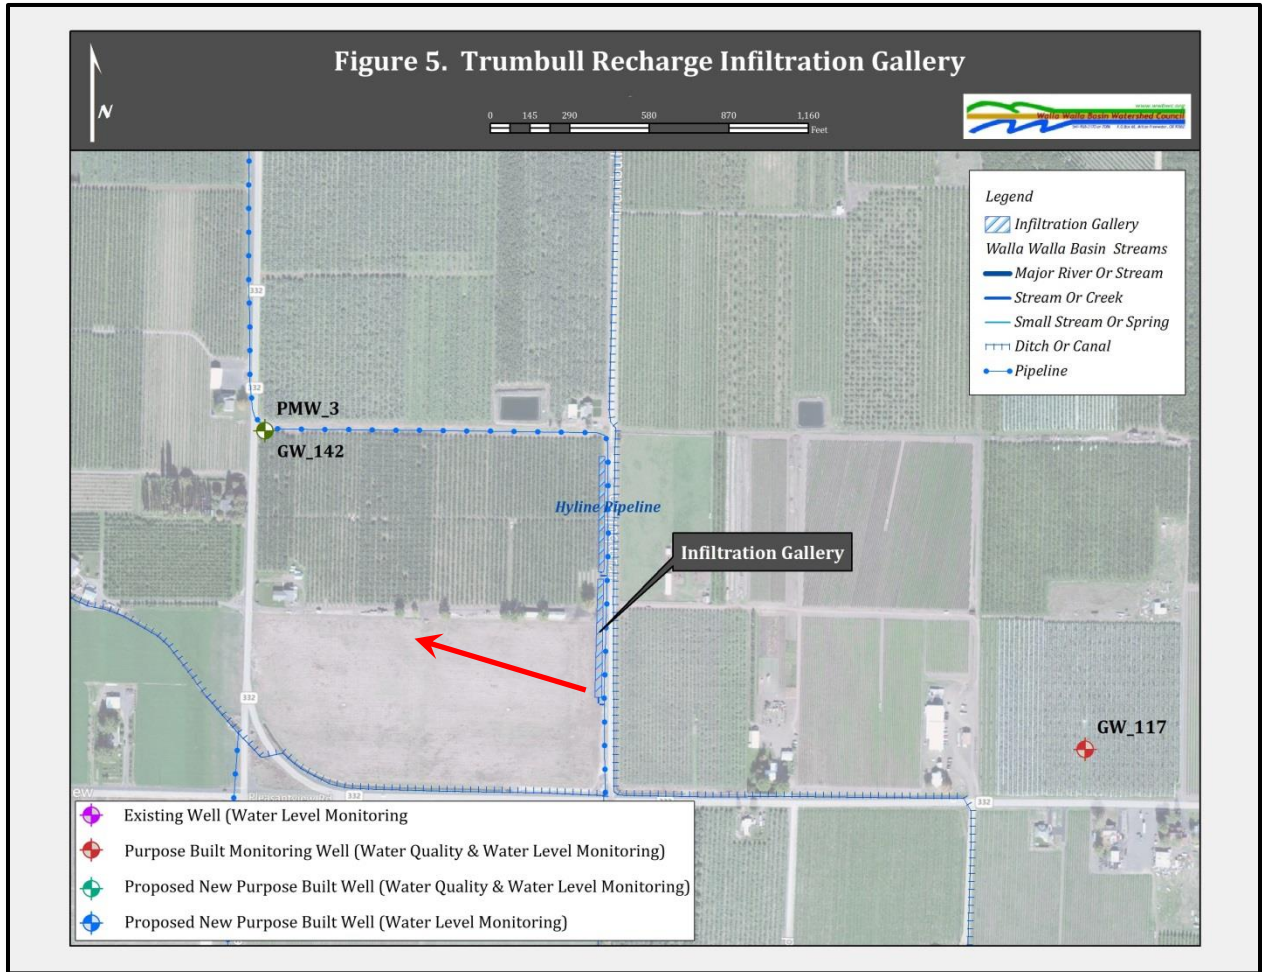


Figure 30 - Monitoring well locations for the Trumbull Aquifer Recharge site. Red arrow indicates generalized groundwater flow direction.

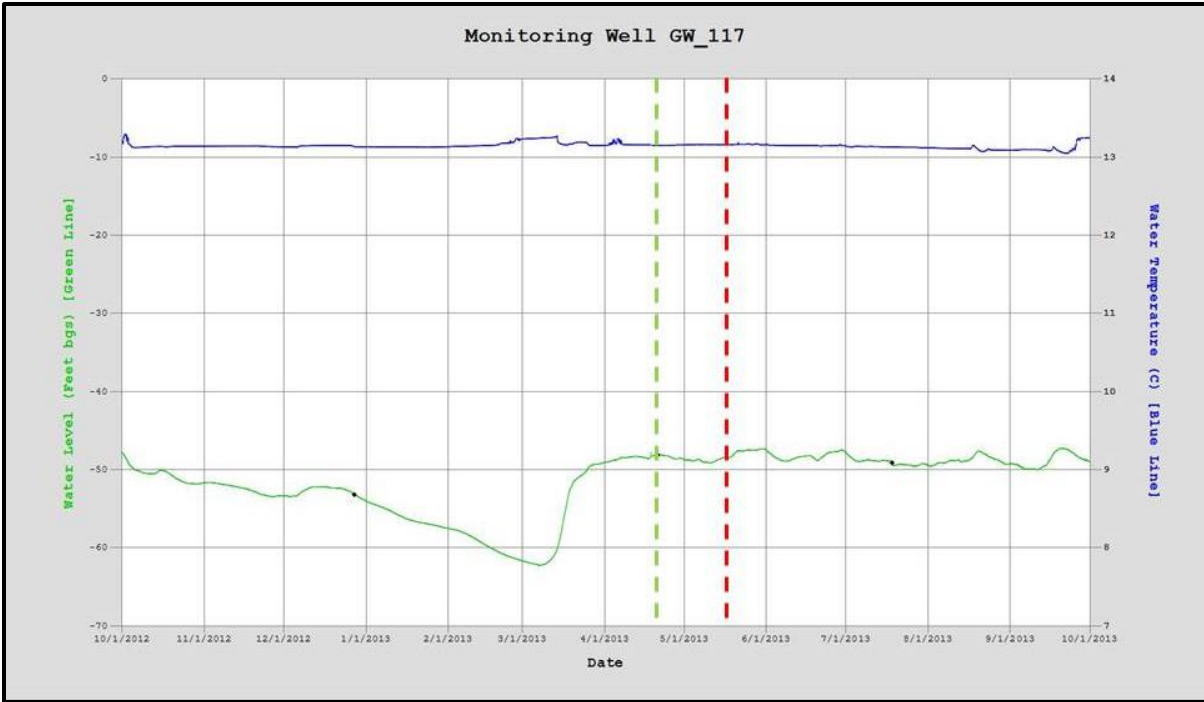


Figure 31 - Hydrograph for monitoring well GW\_117. Green dotted lines indicate start of recharge operations and red dotted lines indicate end of recharge operations.

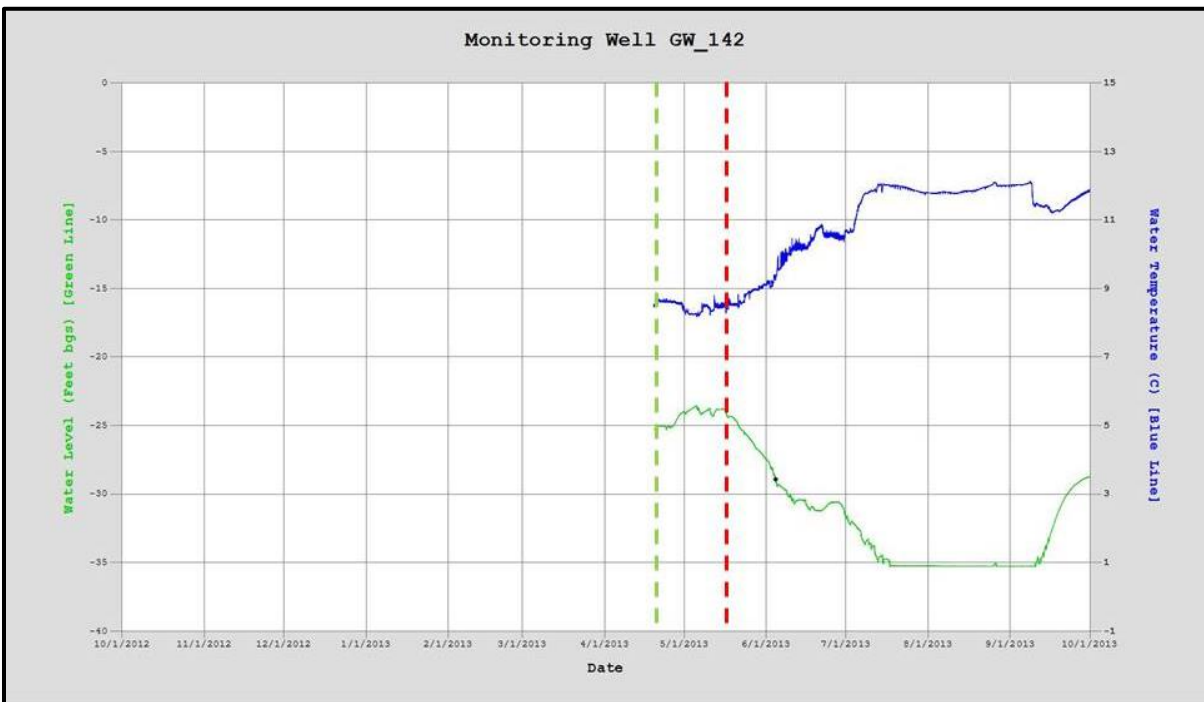


Figure 32 - Hydrograph for monitoring well GW\_142. Green dotted lines indicate start of recharge operations and red dotted lines indicate end of recharge operations.

## ANSPACH RECHARGE SITE

### OVERVIEW

The Anspach Aquifer Recharge site (Anspach site) was constructed during the fall of 2012. This site operates under Limited License 1433 that was issued on March 11<sup>th</sup>, 2013. The site was turned on April 25<sup>th</sup>, 2013 following the construction of the proposed monitoring well GW\_141 described in the Limited License's water quality and water level monitoring plan (see Appendix C). The site ran for 21 days and recharged 11.57 acre-feet (0.55 acre-feet/day) to the alluvial aquifer (Figure 31).

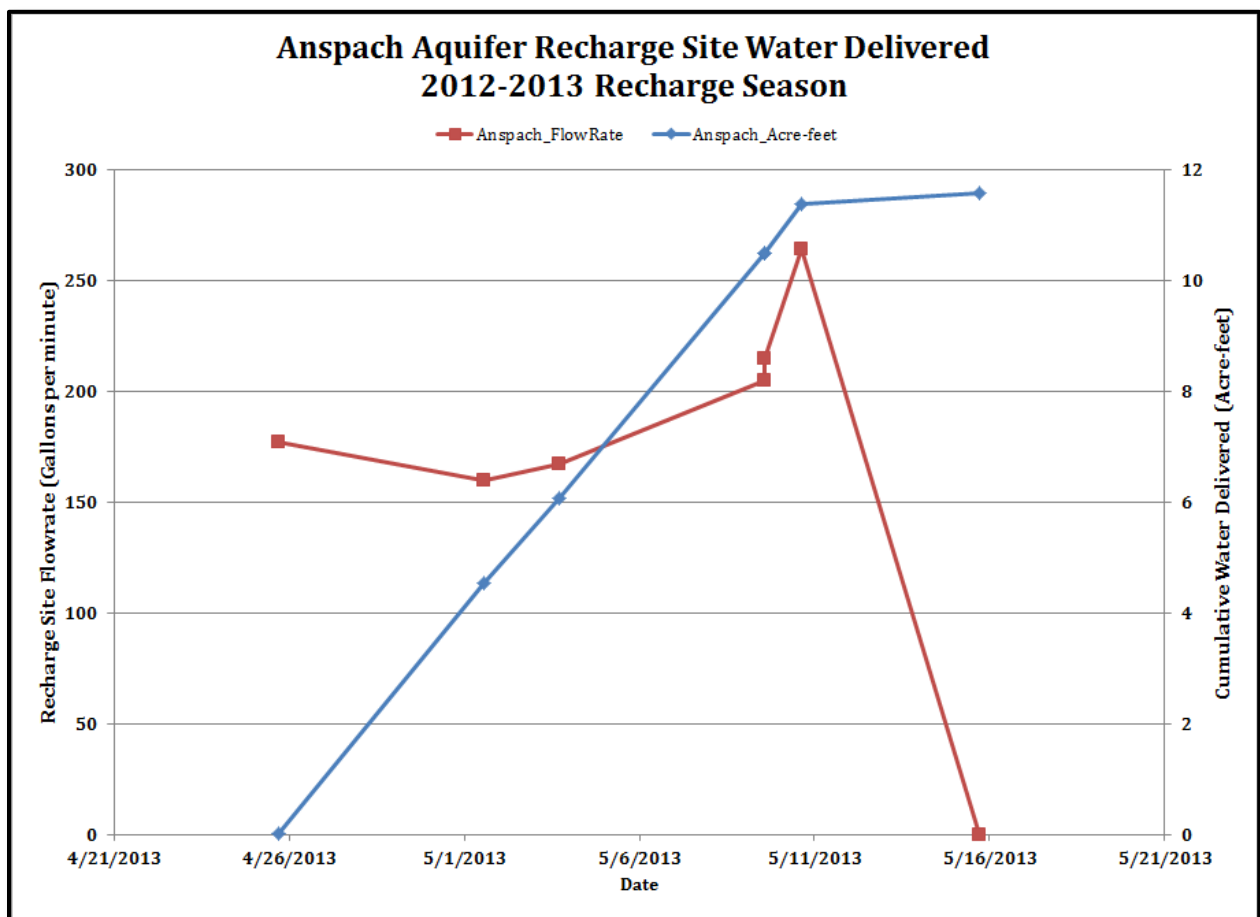


Figure 33 - Hydrograph for the Anspach Aquifer Recharge site showing inflow rates and cumulative water delivered.

### ALLUVIAL WELL RESPONSES

The two up-gradient wells, GW\_135 and GW\_141, do not show responses to recharge operations (Figures 34-36). GW\_135 only has quarterly static water level measurements. Water level increases in GW\_141 during the summer and fall are attributed to irrigation use and ditch seepage up-gradient of the wells. Quarterly static water levels were measured in the cross gradient well, GW\_23 (Figure 37). There are not enough data to indicate if the well responds to aquifer recharge operations.

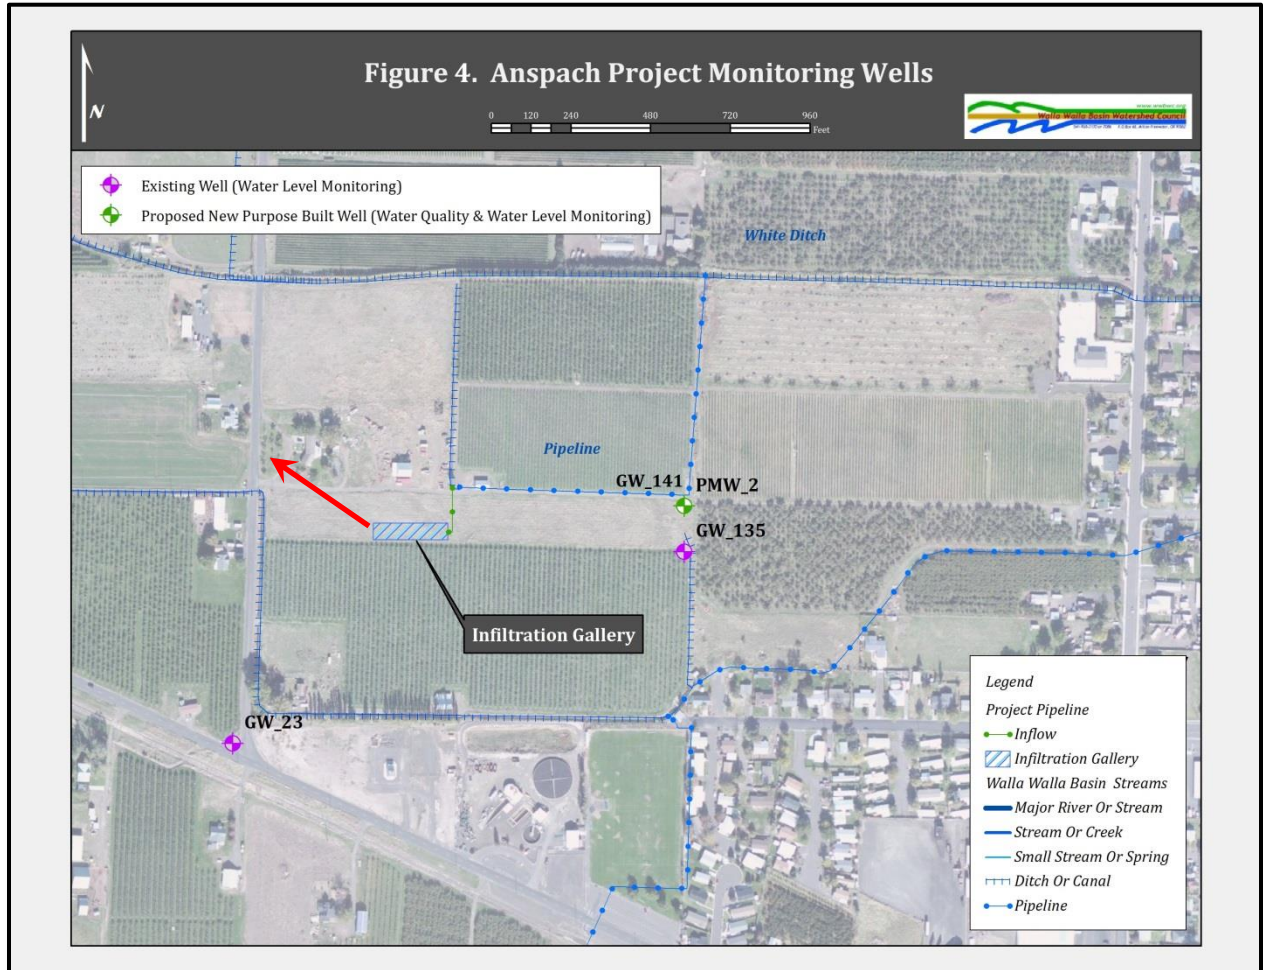


Figure 34 - Monitoring well locations for the Anspach Aquifer Recharge site. Red arrow indicates generalized groundwater flow direction.

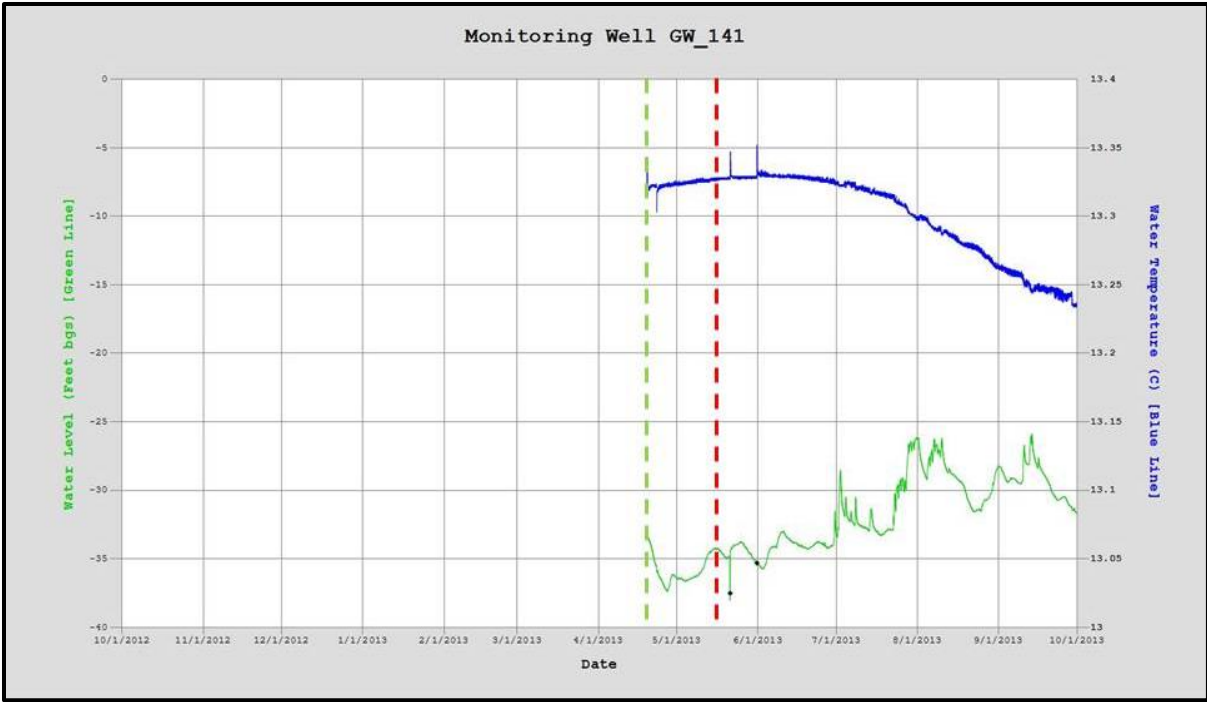


Figure 35 - Hydrograph for monitoring well GW\_141. Green dotted lines indicate start of recharge operations and red dotted lines indicate end of recharge operations.

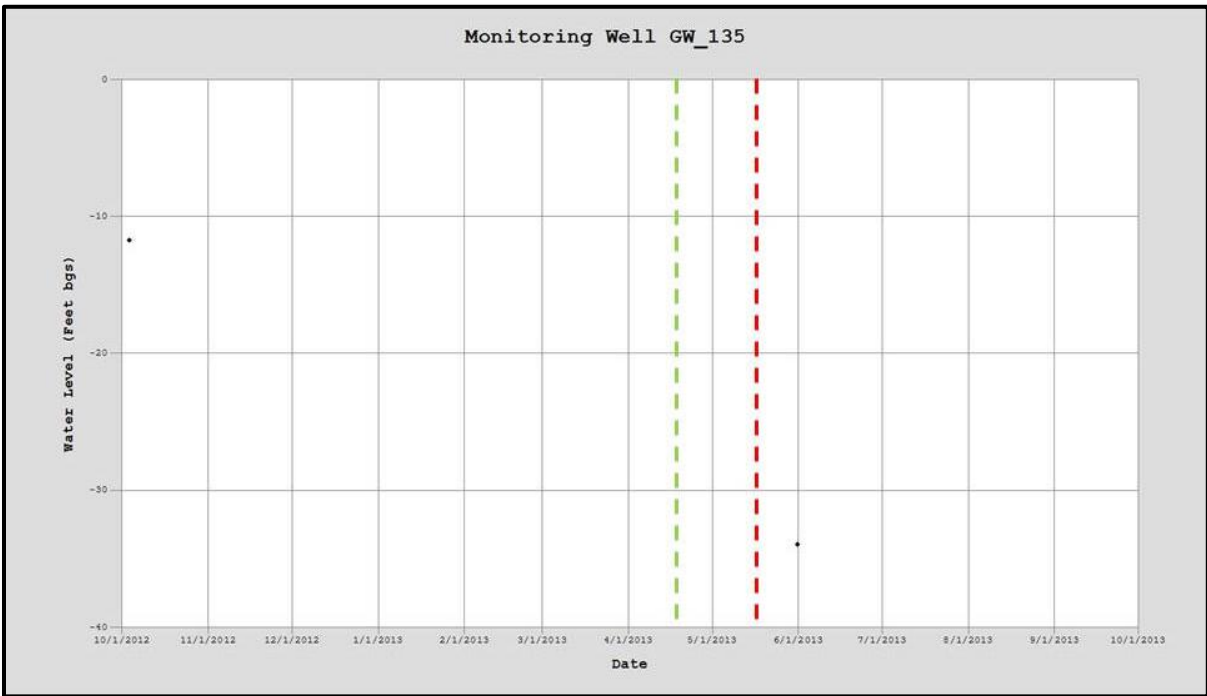


Figure 36 - Hydrograph for monitoring well GW\_135. Green dotted lines indicate start of recharge operations and red dotted lines indicate end of recharge operations.

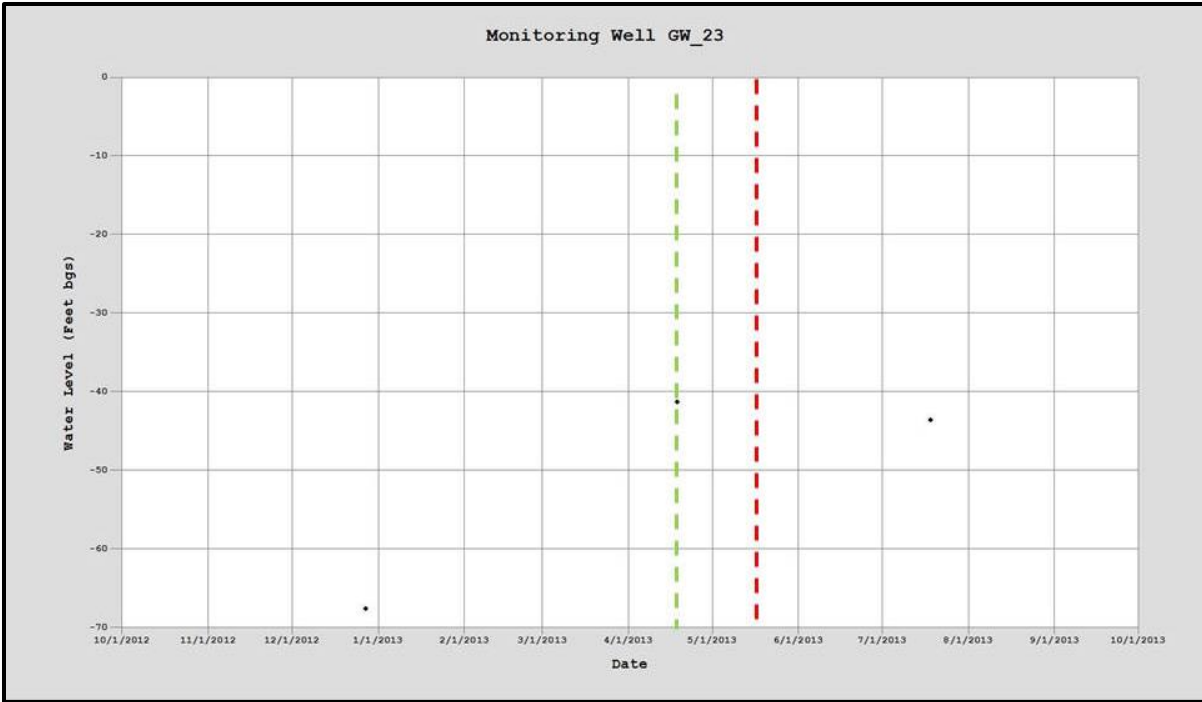


Figure 37 - Hydrograph for monitoring well GW\_23. Green dotted lines indicate start of recharge operations and red dotted lines indicate end of recharge operations.

### WATER QUALITY MONITORING

Water samples and field parameter measurements were collected in accordance with the approved monitoring plan(s). Three water quality sampling events occurred during the WY 2013 recharge season. A single sampling event was conducted at the Johnson site on December 17<sup>th</sup>, 2012 under the approved groundwater monitoring plan Limited License LL-1189. After approval of the new LL-1433 for all three sites and the completion of the new monitoring wells in April, 2013, a second sampling event was performed on April 23<sup>rd</sup>, 2013 with the final sampling event occurring on May 21<sup>st</sup>, 2013, approximately a week after the end of the recharge season. A summary of the results can be found in Tables 2-11 below. Analytical laboratory reports are included in Appendix E. Source water quality and groundwater quality at each site are discussed below.

### SOURCE WATER QUALITY DURING WY 2013

Source water samples were collected at three locations:

- Source Water #1 – Zerba Weir (4/23/2013; 5/21/2013)
- Source Water #2 – Johnson Intake/Duff Weir (12/17/2012; 4/23/2013; 5/21/2013)
- Source Water #3 – Huffman/Richartz Split(4/23/2013; 5/21/2013)

In general source water quality appears to be very good at the all three locations with nutrient contents being below the reporting limit (nitrate and Total Kjeldhal Nitrogen [TKN]) or extremely low concentrations present (i.e. orthophosphate). The source water is relatively dilute with low

concentrations of major cations (sodium, potassium, calcium and magnesium), major anions (sulfate and chloride), and low alkalinity.

**TABLE 2. SOURCE WATER #1 – ZERBA WEIR**

| Sample Parameter               | 12-17-2012 | 04-23-2013 | 05-21-2013 |
|--------------------------------|------------|------------|------------|
| pH                             | No Sample  | 7.23       | 7.59       |
| Conductivity (µohms/cm)        | No Sample  | 0.06       | 0.06       |
| Dissolved Oxygen (mg/L)        | No Sample  | 11.25      | 10.60      |
| Total Organic Carbon (mg/L)    | No Sample  | 2.05       | 0          |
| Nitrate-N(mg/L)                | No Sample  | 0          | 0          |
| Total Kjeldahl Nitrogen (mg/L) | No Sample  | ND         | ND         |
| Sulfate (mg/L)                 | No Sample  | 0.9        | 0.5        |
| Chloride (mg/L)                | No Sample  | 0          | 0          |
| Alkalinity (mg/L)              | No Sample  | 30.0       | 30.4       |
| Calcium (mg/L)                 | No Sample  | 5.1        | 5.0        |
| Orthophosphate (mg/L)          | No Sample  | 0.092      | 0.078      |
| Sodium (mg/L)                  | No Sample  | 2.9        | 3.2        |
| Potassium (mg/L)               | No Sample  | 1.7        | 1.8        |
| Magnesium (mg/L)               | No Sample  | 2.1        | 2.1        |
| Aluminum (mg/L)                | No Sample  | 0.46       | 0.30       |
| Iron (mg/L)                    | No Sample  | 0.565      | 0.472      |
| Manganese (mg/L)               | No Sample  | 0.007      | 0.006      |
| Chemical Oxygen Demand (mg/L)  | No Sample  | No Sample  | No Sample  |
| Total Dissolved Solids (mg/L)  | No Sample  | No Sample  | No Sample  |
| Total Coliform                 | No Sample  | No Sample  | No Sample  |

**TABLE 3. SOURCE WATER #2 – JOHNSON INTAKE/DUFF WEIR**

| Sample Parameter               | 12-17-2012 | 04-23-2013 | 05-21-2013 |
|--------------------------------|------------|------------|------------|
| pH                             | 7.21       | 7.17       | 7.06       |
| Conductivity (µmhos/cm)        | 0.06       | 0.06       | 0.06       |
| Dissolved Oxygen (mg/L)        | No Sample  | 11.53      | 10.5       |
| Total Organic Carbon (mg/L)    | No Sample  | 2.23       | 1.82       |
| Nitrate-N(mg/L)                | < 0.5      | 0          | 0          |
| Total Kjeldahl Nitrogen (mg/L) | ND         | ND         | ND         |
| Sulfate (mg/L)                 | No Sample  | 0.3        | 0.2        |
| Chloride (mg/L)                | ND         | 0          | 0          |
| Alkalinity (mg/L)              | No Sample  | 30.0       | 28.8       |
| Calcium (mg/L)                 | No Sample  | 4.9        | 4.8        |
| Orthophosphate (mg/L)          | ND         | 0.051      | 0.052      |
| Sodium (mg/L)                  | No Sample  | 2.9        | 2.9        |
| Potassium (mg/L)               | No Sample  | 1.9        | 2.0        |
| Magnesium (mg/L)               | No Sample  | 2.1        | 2.1        |
| Aluminum (mg/L)                | No Sample  | 0.440      | 0.410      |
| Iron (mg/L)                    | No Sample  | 0.556      | 0.503      |
| Manganese (mg/L)               | No Sample  | ND         | ND         |
| Chemical Oxygen Demand (mg/L)  | 3.00       | No Sample  | No Sample  |
| Total Dissolved Solids (mg/L)  | 8          | No Sample  | No Sample  |
| Total Coliform                 | Present    | No Sample  | No Sample  |



**TABLE 4. SOURCE WATER #3 – HUFFMAN-RICHARTZ SPLIT**

| <b>Sample Parameter</b>        | <b>12-17-2012</b> | <b>04-23-2013</b> | <b>05-21-2013</b> |
|--------------------------------|-------------------|-------------------|-------------------|
| pH                             | No Sample         | 7.63              | 7.78              |
| Conductivity (µohms/cm)        | No Sample         | 0.07              | 0.07              |
| Dissolved Oxygen (mg/L)        | No Sample         | 11.55             | 10.23             |
| Total Organic Carbon (mg/L)    | No Sample         | 1.28              | 1.11              |
| Nitrate-N(mg/L)                | No Sample         | 0.10              | 0                 |
| Total Kjeldahl Nitrogen (mg/L) | No Sample         | ND                | ND                |
| Sulfate (mg/L)                 | No Sample         | 1.3               | 1.2               |
| Chloride (mg/L)                | No Sample         | 0                 | 0                 |
| Alkalinity (mg/L)              | No Sample         | 34.0              | 33.6              |
| Calcium (mg/L)                 | No Sample         | 5.8               | 5.7               |
| Orthophosphate (mg/L)          | No Sample         | 0.046             | 0.041             |
| Sodium (mg/L)                  | No Sample         | 3.5               | 3.7               |
| Potassium (mg/L)               | No Sample         | 2.1               | 2.0               |
| Magnesium (mg/L)               | No Sample         | 2.4               | 2.4               |
| Aluminum (mg/L)                | No Sample         | 0.445             | 0.261             |
| Iron (mg/L)                    | No Sample         | 0.588             | 0.226             |
| Manganese (mg/L)               | No Sample         | ND                | ND                |
| Chemical Oxygen Demand (mg/L)  | No Sample         | No Sample         | No Sample         |
| Total Dissolved Solids (mg/L)  | No Sample         | No Sample         | No Sample         |
| Total Coliform                 | No Sample         | No Sample         | No Sample         |

### GROUNDWATER QUALITY MONITORING

Groundwater quality samples and field parameter data were collected at six locations (GW\_46, GW\_117, GW\_119, GW\_141, GW\_142, & GW\_144) near the three AR sites. The general rationale for each are listed below (and shown on Figure 2 of the monitoring plan in Appendix C).

- GW\_141 (previously PNW2): provides up gradient monitoring for the entire project and specifically for the Anspach and proposed Barrett sites.
- GW46: provides down gradient monitoring for the Hulette Johnson site.
- GW117: provides water quality information for the central region of the AR program, and up gradient monitoring for the Trumbull site.
- GW\_142 (previously PNW3): provides down gradient coverage for the Trumbull site.
- GW119: provides up gradient coverage for both the NW Umapine site and it would provide a programmatic monitoring location further down gradient than the aforementioned wells do.
- GW\_144 (previously PMW5): provides down gradient monitoring for the NW Umapine site and it provides the furthest down gradient monitoring point in the entire program.

Wells GW\_46 was sampled on December 17, 2012, per the previous sampling plan under LL-1189. All six wells were sampled on April 23, 2013 and May 21, 2013. In addition to the standard list of water quality parameters (Table 5), well GW\_144, a single alluvial groundwater sample was collected to analyze for the approved targeted list of herbicides and pesticides (see Appendix C). Analytical laboratory reports are included as Appendix E.

**Table 5. Analyte list, analytical methods, and method reporting limits for WY 2013 Water Quality Monitoring Program.**

| Analyte                         | Analytical method | Method reporting limit (mg/L) |
|---------------------------------|-------------------|-------------------------------|
| pH                              | -                 | -                             |
| Temperature (°C)                | -                 | -                             |
| Electrical conductivity (mS/cm) | -                 | -                             |
| Dissolved oxygen (mg/L)         | -                 | -                             |
| Total organic carbon            | SM 5310B          | 0.5                           |
| Nitrate-N (mg/L)                | EPA 300.0         | 0.1                           |
| TKN (mg/L)                      | SM 4500 N B       | 0.1                           |
| Sulfate (mg/L)                  | EPA 300.0         | 0.1                           |
| Chloride (mg/L)                 | EPA 300.0         | 0.1                           |
| Alkalinity (mg/L)               | SM2320B           | 5                             |
| Calcium (mg/L)                  | EPA 200.7         | 0.1                           |
| Ortho-phosphate (mg/L)          | EPA 300.0         | 0.1                           |
| Sodium (mg/L)                   | SPA 200.7         | 0.1                           |
| Potassium (mg/L)                | EPA 200.7         | 0.1                           |
| Magnesium (mg/L)                | EPA 200.7         | 0.1                           |
| Aluminum (mg/L)                 | EPA 200.7         | 0.01                          |
| Iron (dissolved) (mg/L)         | EPA 200.7         | 0.01                          |
| Manganese (dissolved) (mg/L)    | EPA 200.7         | 0.05                          |

**TABLE 6. GW\_141 (PMW-2 IN THE MONITORING PLAN)**

| Sample Parameter               | 12-17-2012 | 04-23-2013 | 05-21-2013 |
|--------------------------------|------------|------------|------------|
| pH                             | No Sample  | 6.90       | 7.58       |
| Conductivity (µohms/cm)        | No Sample  | 0.22       | 0.27       |
| Dissolved Oxygen (mg/L)        | No Sample  | 10.16      | 7.54       |
| Total Organic Carbon (mg/L)    | No Sample  | 1.06       | 0          |
| Nitrate-N(mg/L)                | No Sample  | 2.50       | 2.80       |
| Total Kjeldahl Nitrogen (mg/L) | No Sample  | 0.32       | 0.30       |
| Sulfate (mg/L)                 | No Sample  | 12.6       | 13.5       |
| Chloride (mg/L)                | No Sample  | 4.5        | 43.1       |
| Alkalinity (mg/L)              | No Sample  | 88.1       | 84.9       |
| Calcium (mg/L)                 | No Sample  | 19.3       | 18.8       |
| Orthophosphate (mg/L)          | No Sample  | 0.068      | 0.071      |
| Sodium (mg/L)                  | No Sample  | 9.8        | 11.4       |
| Potassium (mg/L)               | No Sample  | 5.3        | 5.2        |
| Magnesium (mg/L)               | No Sample  | 9.2        | 9.0        |
| Aluminum (mg/L)                | No Sample  | 0.842      | 0.755      |
| Iron (mg/L)                    | No Sample  | 0.994      | 1.012      |
| Manganese (mg/L)               | No Sample  | 0.032      | 0.033      |
| Chemical Oxygen Demand (mg/L)  | No Sample  | No Sample  | No Sample  |
| Total Dissolved Solids (mg/L)  | No Sample  | No Sample  | No Sample  |
| Total Coliform                 | No Sample  | No Sample  | No Sample  |

**TABLE 7. GW\_46**

| <b>Sample Parameter</b>        | <b>12-17-2012</b> | <b>04-23-2013</b> | <b>05-21-2013</b> |
|--------------------------------|-------------------|-------------------|-------------------|
| pH                             | 7.20              | 7.10              | 7.06              |
| Conductivity (µmhos/cm)        | 0.06              | 0.06              | 0.06              |
| Dissolved Oxygen (mg/L)        | No Sample         | 10.57             | 9.02              |
| Total Organic Carbon (mg/L)    | No Sample         | 2.36              | 0.87              |
| Nitrate-N(mg/L)                | < 0.5             | 0                 | 0                 |
| Total Kjeldahl Nitrogen (mg/L) | ND                | ND                | ND                |
| Sulfate (mg/L)                 | No Sample         | 1.0               | 0.5               |
| Chloride (mg/L)                | ND                | 0                 | 0                 |
| Alkalinity (mg/L)              | No Sample         | 32.0              | 32.0              |
| Calcium (mg/L)                 | No Sample         | 5.2               | 5.1               |
| Orthophosphate (mg/L)          | ND                | 0.056             | 0.053             |
| Sodium (mg/L)                  | No Sample         | 3.0               | 3.1               |
| Potassium (mg/L)               | No Sample         | 2.4               | 2.4               |
| Magnesium (mg/L)               | No Sample         | 2.3               | 2.3               |
| Aluminum (mg/L)                | No Sample         | 0.244             | 0.228             |
| Iron (mg/L)                    | No Sample         | 0.306             | 0.310             |
| Manganese (mg/L)               | No Sample         | ND                | ND                |
| Chemical Oxygen Demand (mg/L)  | 2.00              | No Sample         | No Sample         |
| Total Dissolved Solids (mg/L)  | 8.20              | No Sample         | No Sample         |
| Total Coliform                 | Present           | No Sample         | No Sample         |

**TABLE 8. GW\_117 (PMW-3 IN THE MONITORING PLAN)**

| <b>Sample Parameter</b>        | <b>12-17-2012</b> | <b>04-23-2013</b> | <b>05-21-2013</b> |
|--------------------------------|-------------------|-------------------|-------------------|
| pH                             | No Sample         | 6.50              | 6.88              |
| Conductivity (µohms/cm)        | No Sample         | 0.26              | 0.19              |
| Dissolved Oxygen (mg/L)        | No Sample         | 8.45              | 7.77              |
| Total Organic Carbon (mg/L)    | No Sample         | 0.40              | 0.97              |
| Nitrate-N(mg/L)                | No Sample         | 0.50              | 1.10              |
| Total Kjeldahl Nitrogen (mg/L) | No Sample         | 0.36              | 0.28              |
| Sulfate (mg/L)                 | No Sample         | 14.0              | 12.0              |
| Chloride (mg/L)                | No Sample         | 16.6              | 12.5              |
| Alkalinity (mg/L)              | No Sample         | 84.1              | 78.1              |
| Calcium (mg/L)                 | No Sample         | 20.4              | 17.6              |
| Orthophosphate (mg/L)          | No Sample         | 0.055             | 0.058             |
| Sodium (mg/L)                  | No Sample         | 7.3               | 7.8               |
| Potassium (mg/L)               | No Sample         | 20.0              | 16.4              |
| Magnesium (mg/L)               | No Sample         | 8.7               | 8.0               |
| Aluminum (mg/L)                | No Sample         | 0.025             | 0.021             |
| Iron (mg/L)                    | No Sample         | 0.041             | 0.046             |
| Manganese (mg/L)               | No Sample         | 0.007             | 0.006             |
| Chemical Oxygen Demand (mg/L)  | No Sample         | No Sample         | No Sample         |
| Total Dissolved Solids (mg/L)  | No Sample         | No Sample         | No Sample         |
| Total Coliform                 | No Sample         | No Sample         | No Sample         |

**TABLE 9. GW\_142 (PWM-3 IN MONITORING PLAN)**

| <b>Sample Parameter</b>        | <b>12-17-2012</b> | <b>04-23-2013</b> | <b>05-21-2013</b> |
|--------------------------------|-------------------|-------------------|-------------------|
| pH                             | No Sample         | 6.81              | 7.50              |
| Conductivity (µohms/cm)        | No Sample         | 0.10              | 0.14              |
| Dissolved Oxygen (mg/L)        | No Sample         | 10.14             | 8.13              |
| Total Organic Carbon (mg/L)    | No Sample         | 4.70              | 0.95              |
| Nitrate-N(mg/L)                | No Sample         | 0.40              | 0.10              |
| Total Kjeldahl Nitrogen (mg/L) | No Sample         | ND                | ND                |
| Sulfate (mg/L)                 | No Sample         | 3.0               | 2.4               |
| Chloride (mg/L)                | No Sample         | 0                 | 0                 |
| Alkalinity (mg/L)              | No Sample         | 48.0              | 51.2              |
| Calcium (mg/L)                 | No Sample         | 8.4               | 8.0               |
| Orthophosphate (mg/L)          | No Sample         | 0.057             | 0.036             |
| Sodium (mg/L)                  | No Sample         | 7.5               | 9.1               |
| Potassium (mg/L)               | No Sample         | 1.0               | 0.8               |
| Magnesium (mg/L)               | No Sample         | 3.6               | 3.4               |
| Aluminum (mg/L)                | No Sample         | 2.490             | 1.520             |
| Iron (mg/L)                    | No Sample         | 1.342             | 0.975             |
| Manganese (mg/L)               | No Sample         | 0.026             | 0.021             |
| Chemical Oxygen Demand (mg/L)  | No Sample         | No Sample         | No Sample         |
| Total Dissolved Solids (mg/L)  | No Sample         | No Sample         | No Sample         |
| Total Coliform                 | No Sample         | No Sample         | No Sample         |

**TABLE 10. GW\_119**

| <b>Sample Parameter</b>        | <b>12-17-2012</b> | <b>04-23-2013</b> | <b>05-21-2013</b> |
|--------------------------------|-------------------|-------------------|-------------------|
| pH                             | No Sample         | 7.11              | 7.14              |
| Conductivity (µohms/cm)        | No Sample         | 0.39              | 0.38              |
| Dissolved Oxygen (mg/L)        | No Sample         | 10.21             | 9.05              |
| Total Organic Carbon (mg/L)    | No Sample         | 1.22              | 1.37              |
| Nitrate-N(mg/L)                | No Sample         | 6.50              | 5.90              |
| Total Kjeldahl Nitrogen (mg/L) | No Sample         | 1.44              | 1.42              |
| Sulfate (mg/L)                 | No Sample         | 17.4              | 17.7              |
| Chloride (mg/L)                | No Sample         | 3.2               | 3.6               |
| Alkalinity (mg/L)              | No Sample         | 148.1             | 147.7             |
| Calcium (mg/L)                 | No Sample         | 32.9              | 32.5              |
| Orthophosphate (mg/L)          | No Sample         | 0.097             | 0.099             |
| Sodium (mg/L)                  | No Sample         | 20.2              | 20.4              |
| Potassium (mg/L)               | No Sample         | 8.5               | 8.6               |
| Magnesium (mg/L)               | No Sample         | 14.4              | 14.2              |
| Aluminum (mg/L)                | No Sample         | 0.015             | 0.015             |
| Iron (mg/L)                    | No Sample         | 0.007             | 0.006             |
| Manganese (mg/L)               | No Sample         | ND                | ND                |
| Chemical Oxygen Demand (mg/L)  | No Sample         | No Sample         | No Sample         |
| Total Dissolved Solids (mg/L)  | No Sample         | No Sample         | No Sample         |
| Total Coliform                 | No Sample         | No Sample         | No Sample         |

**TABLE 11. GW\_144 (PMW-5 IN MONITORING PLAN)**

| <b>Sample Parameter</b>        | <b>12-17-2012</b> | <b>04-23-2013</b> | <b>05-21-2013</b> |
|--------------------------------|-------------------|-------------------|-------------------|
| pH                             | No Sample         | 6.99              | 6.80              |
| Conductivity ( $\mu$ ohms/cm)  | No Sample         | 0.65              | 0.68              |
| Dissolved Oxygen (mg/L)        | No Sample         | 8.77              | 6.52              |
| Total Organic Carbon (mg/L)    | No Sample         | 2.14              | 3.86              |
| Nitrate-N(mg/L)                | No Sample         | 18.80             | 19.90             |
| Total Kjeldahl Nitrogen (mg/L) | No Sample         | 3.70              | 3.67              |
| Sulfate (mg/L)                 | No Sample         | 30.3              | 30.9              |
| Chloride (mg/L)                | No Sample         | 23.0              | 22.3              |
| Alkalinity (mg/L)              | No Sample         | 146.1             | 147.1             |
| Calcium (mg/L)                 | No Sample         | 51.5              | 53.4              |
| Orthophosphate (mg/L)          | No Sample         | 0.103             | 0.109             |
| Sodium (mg/L)                  | No Sample         | 24.6              | 25.0              |
| Potassium (mg/L)               | No Sample         | 10.3              | 10.4              |
| Magnesium (mg/L)               | No Sample         | 20.6              | 20.5              |
| Aluminum (mg/L)                | No Sample         | 0.210             | 0.215             |
| Iron (mg/L)                    | No Sample         | 0.322             | 0.031             |
| Manganese (mg/L)               | No Sample         | 0.022             | 0.021             |
| Chemical Oxygen Demand (mg/L)  | No Sample         | No Sample         | No Sample         |
| Total Dissolved Solids (mg/L)  | No Sample         | No Sample         | No Sample         |
| Total Coliform                 | No Sample         | No Sample         | No Sample         |

Intra-well variations between the sampling events during recharge (December and April) and post recharge (May) appears to be relatively subtle, with some wells showing increases in concentrations after recharge was completed in analytes that would have been diluted by surface water (i.e. Nitrate, Alkalinity, major anions and cations). In general, wells that were clearly influenced by recharge operations at the three sites (specifically GW\_46 and GW\_142) were observed to have concentrations of indicator parameters (Table 5) that were more closely associated with source water (Tables 2-4, 7 & 9).

On an inter-well basis some substantial differences in groundwater quality were apparent. Upgradient well GW\_141 was observed to have Nitrate (as Nitrogen) values between 2.50 and 2.80 mg/L and Alkalinity between 88.1 and 88.49 mg/L in WY 2102 (Table X). Respectively, these concentrations were greater than those observed at wells GW\_46, GW\_117 and GW\_142 during WY 2013, all of these locations are located near AR sites. Wells located further downgradient (GW\_119 and GW\_144) were observed to have higher concentrations of Nitrate (as Nitrogen) and Alkalinity, relative to water quality monitoring wells located upgradient and nearest the 3 AR sites. This likely reflects the influence of agricultural activities resulting in infiltration of nutrients below the root zone.

Based on the interpretation of hydraulic response and observed leakage in the unlined canal systems in the Walla Walla basin, it would appear that groundwater quality at some of the “upgradient” locations is influenced by surface water contributions; however, when comparing upgradient and downgradient monitoring locations at the Trumbull (GW\_117 and GW\_142) and

Johnson (GW\_141 and GW\_46) sites, it would appear that groundwater quality improvements are occurring based on substantial decreases in Nitrate (as Nitrogen), Alkalinity and major anion and cation concentrations.

## **DISCUSSION OF RESULTS**

During the WY 2013 recharge season 5,826.35 acre-feet (1,898,521,973.85 gallons) of water was recharged into the alluvial aquifer northwest of Milton-Freewater, OR. Water levels in downgradient alluvial aquifer monitoring wells showed rapid response to recharge, resulting in increases in water levels in the alluvial aquifer near the sites. In many of these wells a year to year positive (i.e. increasing) trend in alluvial aquifer water levels suggests that water is being stored within the alluvial aquifer, potentially due to aquifer recharge activities; however, continued monitoring and recharge operations will likely be needed to establish a strong correlation.

The increase in water levels between October 1, 2012 and October 2013 at the Johnson site, suggest that the AR program performed in 2012-2013 simulated floodplain function and processes that have been lost due to irrigation development and channelization of the river and stream channels for flood control and other uses. With continued AR activities and increases in the total volume of recharge under fully operational conditions at all three current sites, increased alluvial aquifer water levels would be anticipated which should lead to further spring flow and/or base flow to the Walla Walla river system similar to those observed in previous pilot testing operations at the Johnson site (WWBWC, 2010).

As in previous recharge seasons, groundwater and surface water quality data collected during aquifer recharge activities do not suggest that potential water quality concerns or that AR activities are degrading groundwater quality per Condition 5 of LL-1433. In some cases, groundwater quality parameters improve over the recharge season, while at other locations a clear improvement cannot be delineated based on the period of observation. Source water quality being delivered to the aquifer recharge sites continues to be of acceptable quality and would not be anticipated to degrade groundwater quality.

## **PROPOSED AR PROGRAM IN WY 2014**

The AR program will be expanded for the WY 2014 recharge season. At least two additional sites will be active (the Barrett and NW Umapipe sites) under LL 1433. Also, the Trumbull and Anspach sites are expected to operate for a longer period during WY 2014 recharge operations assuming water is available. Operating the new sites for a longer duration should help to identify their influence on the alluvial aquifer in up and down gradient wells.

Maintenance for WY 2014 will include scraping the spreading basins at the Johnson site to remove sediment accumulated during WY 2013 recharge operations. A new flowmeter will be installed for infiltration gallery #2 at the Johnson recharge site to replace an older malfunctioning flowmeter. Infiltration gallery #2 was not operated during WY 2013 because the flowmeter's totalizer was malfunctioning. No maintenance is planned for any of the infiltration galleries (Trumbull, Anspach, & Johnson) before WY 2014 recharge operations.

Monitoring will continue to be performed per the plan approved under LL-1433. A report summarizing the water level monitoring, water quality monitoring and AR operations performed in 2013 and 2014 (WY 2013) will be submitted to OWRD by February 15, 2015.

## REFERENCES

- Barker, R.A., and MacNish, R.D., 1976. Digital Model of the Gravel Aquifer, Walla Walla River Basin, Washington and Oregon. Washington Department of Ecology. Water Supply Bulletin 45, 56 p, 1 plate.
- GSI, 2012. Review of Previously Collected Source Water and Groundwater Quality Data from Alluvial Aquifer Recharge Projects in the Walla Walla Basin, Washington and Oregon. Consulting Report for the Walla Walla Basin Watershed Council, 70 p.
- Jiménez, A. C.P., 2012. Managed Artificial Aquifer Recharge and Hydrological Studies in the Walla Walla Basin to Improve River and Aquifer Conditions. Oregon State University: Water Resources Engineering, Ph.D. Dissertation.
- Newcomb, R.C., 1965. Geology and ground-water resources of the Walla Walla River Basin, Washington and Oregon: Washington Department of Conservation, Division of Water Resources. Water Supply Bulletin 21, 151 p, 3 plates.
- Piper, A. R. (1933). *Groundwater in the Walla Walla Basin, Oregon-Washington-Part I*. Department of the Interior, U.S. Geological Survey. 99p.
- Piper, A. R. (1933). *Groundwater in the Walla Walla Basin, Oregon-Washington-Part 2*. Department of the Interior, U.S. Geological Survey. 176p.
- WWBWC, 2010. Aquifer recharge as a water management tool – Hudson Bay recharge testing site report (2004-2009). Report for Hudson Bay District Improvement Company and Oregon Water Resources Department.
- WWBWC, 2012. 2012 Walla Walla Basin Seasonal Seepage Assessments Report – Walla Walla River, Mill Creek, Touchet River, and Yellowhawk Creek.
- WWBWC, 2013. Walla Walla Basin Aquifer Recharge Strategic Plan, January 2013.



**APPENDIX A – LIMITED LICENSE LL-1189**

# Oregon Water Resources Department



## **Final Order Limited License Application LL-1189**

### ***Appeal Rights***

This is a final order in other than a contested case. This order is subject to judicial review under ORS 183.484. Any petition for judicial review must be filed within the 60-day time period specified by ORS 183.484(2). Pursuant to ORS 536.075 and OAR 137-004-0080 you may either petition for judicial review or petition the Director for reconsideration of this order. A petition for reconsideration may be granted or denied by the Director, and if no action is taken within 60 days following the date, the petition was filed, the petition shall be deemed denied.

### ***Requested Water Use***

On January 30, 2009, the Water Resources Department received completed application **LL-1189** from Hudson Bay District Improvement Company for the use of 50 cubic feet per second from the Walla Walla River, located in the SE  $\frac{1}{4}$ , NE  $\frac{1}{4}$ , Section 2, and the SW  $\frac{1}{4}$ , NE  $\frac{1}{4}$ , Section 12, Township 6 North, Range 35 East, W.M., for ground water recharge use, for the period of February 19, 2009, through February 18, 2014.

### ***Authorities***

The Department may approve a limited license pursuant to its authority under ORS 537.143, 537.144 and OAR 690-340-0030.

ORS 537.143(2) authorizes the Director to revoke the right to use water under a limited license if it causes injury to any water right or a minimum perennial streamflow.

A limited license will not be issued for more than five consecutive years for the same use, as directed by ORS 537.143(8).

### ***Findings of Fact***

1. The forms, fees, and map have been submitted, as required by OAR 690-340-0030(1).
2. The Department provided public notice of the application, on February 3, 2009, as required by OAR 690-340-0030(2).
3. This limited license request is limited to an area within a single drainage basin as required by OAR 690-340-0030(3).
4. The Department has determined that there is water available for the requested use.
5. The Department has determined that the proposed source has not been withdrawn from further appropriation.

6. Because this use is from surface water and has the potential to impact fish, the Department finds that fish screening is required to protect the public interest.
7. Because the use requested is longer than 120 days and because the use is in an area that has sensitive, threatened or endangered fish species, the use is subject to the Department's rules under OAR 690-33. These rules aid the Department in determining whether a proposed use will impair or be detrimental to the public interest with regard to sensitive, threatened, or endangered fish species.
8. The Department has received comments related to the possible issuance of the limited license from the Confederated Tribes of the Umatilla Indian Reservation (CTUIR) in support of the project and requesting measured and reported data and results from the previous 5 years and annual reporting of results to CTUIR and basin water managers. Oregon Department of Environmental Quality (ODEQ) notified the Department that it had no comments, since the water quality monitoring plan for the previous Limited License was acceptable, and did not change for this application. The comments did cause the Department to add additional conditions or limitations. The licensee shall work with CTUIR to provide data as requested. The authorization of limited license **LL-1189**, as conditioned below, will satisfactorily address the issues raised in those comments.
9. Pursuant to OAR 690-340-0030(4)(5), conditions have been added with regard to notice and water-use measurement.

### *Conclusions of Law*

The proposed water use will not impair or be detrimental to the public interest pursuant to OAR 690-340-0030(2), as limited in the order below.

### *Order*


Therefore, pursuant to ORS 537.143, ORS 537.144, and OAR 690-340-0030, application **LL-1189** is approved as conditioned below.

1. The period and rate of use for **LL-1189** shall be from February 23, 2009, through February 18, 2014, for the use of 50 cfs of water from the Walla Walla River, for the purpose of groundwater recharge testing during the period November 1 through May 15 each year.
2. The licensee shall give notice to the Watermaster in the district where use is to occur not less than 15 days or more than 60 days in advance of using the water under the limited license. The notice shall include the location of the diversion, the quantity of water to be diverted and the intended use and place of use. In the case of this application, this order serves as the notice described above.

3. When water is diverted under this Limited License, the use is limited to times when the following minimum streamflows are met in the Tum A Lum reach of the Walla Walla River, between the Little Walla Walla River diversion and Nursery Bridge Dam and flowing past Nursery Bridge Dam: November – 64 cfs, December and January – 95 cfs, February to May 15 – 150 cfs. Nursery Bridge Dam is located just downstream of Nursery Bridge and is downstream of the Little Walla Walla diversion. The District 5 Watermaster, based on gage and/or streamflow measurements, shall make the determination that the above described streamflows are flowing past Nursery Bridge Dam. Diversion under this Limited License shall cease when said streamflows are unmet.
4. The Licensee shall follow the same operations, monitoring and reporting plan that was developed with ODEQ for the water quality plan followed in LL-758.
5. Based on a review of water quality information generated during the term of this Limited License, or from other sources, ODEQ may require the licensee to terminate the diversion of water into the recharge area. In addition, if monitoring data or other information result in identification of potential water quality concerns, ODEQ may require modifications to the existing Limited License and/or require a permit to address the water quality concerns prior to resumption of artificial groundwater recharge.
6. Before water use may begin under this license, the licensee shall install a totalizing flow meter at each point of diversion. The totalizing flow meter must be installed and maintained in good working order. In addition the licensee shall maintain a record of all water use, including the total number of hours of pumping, the total quantity pumped, and the categories of beneficial use to which the water is applied. During the period of the limited license, the record of use shall be submitted to the Department annually, and shall be submitted to the Watermaster upon request.
7. The Director may revoke the right to use water for any reason described in ORS 537.143(2), and OAR 690-340-0030(6). Such revocation may be prompted by field regulatory activities or by any other information.
8. Use of water under a limited license shall not have priority over any water right exercised according to a permit or certificate, and shall be subordinate to all other authorized uses, including Limited Licenses issued prior to this one, that rely upon the same source.
9. The licensee shall install, maintain and operate fish screening and by-pass devices as required by the Oregon Department of Fish and Wildlife to prevent fish from entering the proposed diversion. See copy of enclosed fish screening criteria for information.
10. The licensee shall provide the Confederated Tribes of the Umatilla Indian Reservation the data, results, and analysis that were sought by letter dated February 17, 2009.
11. A copy of this limited license shall be kept at the place of use, and be available for inspection by the Watermaster or other state authority.

NOTE: This water-use authorization is temporary. Applicants are advised that issuance of this final order does not guarantee that any permit for the authorized use will be issued in the future; any investments should be made with that in mind.

Issued March 5, 2009

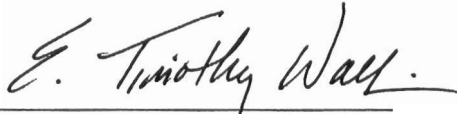

E. Timothy Wallin, Water Rights Program Manager, *for*  
Phillip C. Ward, Director  
Water Resources Department

Enclosures - limited license, fish screen criteria

cc: Tony Justus, District 5 Watermaster  
Bill Duke, ODFW  
Phil Richerson, DEQ  
Eric Quaempts, CTUIR  
Hydrographics  
File

If you need further assistance, please contact the Water Rights Section at the address, phone number, or fax number below. When contacting the Department, be sure to reference your limited license number for fastest service.

Remember, this limited license does not provide a secure source of water. Water use can be revoked at any time. Such revocation may be prompted by field regulatory activities or many other reasons.

Water Rights Section  
Oregon Water Resources Department  
725 Summer Street NE, Suite A  
Salem OR 97301-1271  
Phone: (503) 986-0817      Fax: (503) 986-0901

**APPENDIX B – LIMITED LICENSE LL-1433**

---

# Oregon Water Resources Department



**Final Order  
Limited License Application LL-1433  
Hudson Bay District Improvement  
Company**

## ***Appeal Rights***

This is a final order in other than a contested case. This order is subject to judicial review under ORS 183.484. Any petition for judicial review must be filed within the 60-day time period specified by ORS 183.484(2). Pursuant to ORS 536.075 and OAR 137-004-0080 you may either petition for judicial review or petition the Director for reconsideration of this order. A petition for reconsideration may be granted or denied by the Director, and if no action is taken within 60 days following the date the petition was filed, the petition shall be deemed denied.

## ***Requested Water Use***

On August 31, 2012, the Water Resources Department received completed Limited License request **1433** from Hudson Bay District Improvement Company for the use of up to 45 cubic feet per second from the Walla Walla River, located in the SW ¼, NE ¼, Section 12, Township 5 North, Range 35 East, W.M., for the purpose of artificial groundwater recharge testing, for the period of November 1, 2012 through December 31, 2017.

## ***Authorities***

The Department may approve a limited license pursuant to its authority under ORS 537.143, 537.144 and OAR 690-340-0030.

ORS 537.143(2) authorizes the Director to revoke the right to use water under a limited license if it causes injury to any other water right or a minimum perennial streamflow.

A limited license will not be issued for more than five consecutive years for the same use, as directed by ORS 537.143(8).

## ***Findings of Fact***

1. The forms, fees and map have been submitted, as required by OAR 690-340-0030(1).
2. The Department provided public notice of the application, on September 11, 2012 as required by OAR 690-340-0030(2).
3. This limited license request is limited to an area within a single drainage basin as required by OAR 690-340-0030(3).
4. The Department has determined that there is water available for the requested use.

5. The Department has determined that the proposed source has not been withdrawn from further appropriation.
6. Because this use is from surface water and has the potential to impact fish, the Department finds that fish screening is required to protect the public interest.
7. Because the use requested is longer than 120 days and because the use is in an area that has sensitive, threatened or endangered fish species, the use is subject to the Department's rules under OAR 690-33. These rules aid the Department in determining whether a proposed use will impair or be detrimental to the public interest with regard to sensitive, threatened, or endangered fish species.
8. The Department has determined that the use is not subject to its rules under OAR 690-350. However, artificial groundwater recharge testing must be done in a manner that provides a test with results and supplemental information for the user's artificial groundwater recharge permit application. Consistent with this intent, the Department has added conditions pertaining to testing, monitoring, reporting and coordination with Oregon Department of Environmental Quality (ODEQ), Oregon Department of Fish and Wildlife (ODFW) and this Department.
9. The Department has received comments related to the possible issuance of the limited license from ODEQ requesting changes to the proposed monitoring plan. These changes pertained to sampling and reporting. The water quality monitoring plan was revised and approved by ODEQ on November 28, 2012. The Department has received comments from ODFW in support of this license and recommending conditions related to instream water rights and bypass flows. The Department's Groundwater Section determined the testing and water quantity monitoring plan submitted as an addendum to the application on January 3, 2013 is sufficient for artificial groundwater recharge testing. The authorization of Limited License **1433** is conditioned to satisfactorily address issues raised in those comments.
10. Pursuant to OAR 690-340-0030(4)(5), conditions have been added with regard to notice and water-use measurement.

### ***Conclusions of Law***

The proposed water use will not impair or be detrimental to the public interest pursuant to OAR 690-340-0030(2), as limited in the order below.

### ***Order***

Therefore, pursuant to ORS 537.143, ORS 537.144, and OAR 690-340-0030, application for Limited License **1433** is approved as conditioned below.

1. The period and rate of use for Limited License **1433** shall be from March 7, 2013, through December 31, 2017 for the use of up to 45 cubic feet per second from the Walla Walla River, for the purpose of artificial groundwater recharge testing. The season of use is limited to November 1 through May 15. This limited License **1433** replaces and supersedes LL-1189 which is of no further force or effect.



2. The licensee shall give notice to the Watermaster in the district where use is to occur not less than 15 days or more than 60 days in advance of using the water under this license. The notice shall include the location of the diversion, and the volume of water to be diverted and the intended use and place of use.
3. When water is diverted under this license, the use is limited to times when the following minimum streamflows are met in the Tum A Lum reach of the Walla Walla River, between the Little Walla Walla River diversion and Nursery Bridge Dam and flowing past Nursery Bridge Dam: November – 64 cfs, December and January – 95 cfs, February to May 15 – 150 cfs. Nursery Bridge Dam is located just downstream of Nursery Bridge and is downstream of the Little Walla Wall diversion. The District 5 Watermaster, based on gage and/or flow measurements, shall make the determination that the above described streamflows are flowing past Nursery Bridge Dam. Diversion under this license shall cease when said streamflows are unmet.
4. The Licensee shall follow the operation, water quality and water level monitoring plans described in the document entitled “Hydrogeologic Setting and Source Water and Groundwater Monitoring and Reporting Plan for the Hudson Bay District Improvement Company Multi-Site Alluvial Aquifer Limited License Application **LL-1433**, Umatilla County, Oregon” and dated January 3, 2013. This plan may be modified after review and approval of changes by the Department.
5. The licensee shall comply with all ODEQ water-quality requirements. If monitoring data or other information result in identification of potential water-quality concerns, ODEQ may seek modifications to the monitoring and test plan and/or require a permit of its own to address the water-quality concerns prior to resumption of artificial groundwater recharge testing.
6. Before water use may begin under this license, the licensee shall install a totalizing flow meter at each point of diversion and at the entry point to each recharge test site. The totalizing flow meters must be maintained in good working order. In addition the licensee shall maintain a record of all water use, including the total number of hours of diversion, the total volume diverted, and the categories of beneficial use to which the water is applied. During the period of the limited license, the record of use shall be available for review by the Department upon request, and shall be submitted to the Department annually and to Watermaster upon request. This record shall include the amount of water diverted from the Walla Walla River, and the amount delivered to each recharge area.
7. The Director may revoke the right to use water for any reason described in ORS 537.143(2), and OAR 690-340-0030(6). Such revocation may be prompted by field regulatory activities or by any other reason.
8. Use of water under a limited license shall not have priority over any water right exercised according to a permit or certificate, and shall be subordinate to all other authorized uses that rely upon the same source.
9. The licensee shall install, maintain and operate fish screening and by-pass devices as required by the Oregon Department of Fish and Wildlife to prevent fish from entering the proposed diversion. See copy of enclosed fish screening criteria for information.

10. In supporting this license, ODFW retains the prerogative to pursue a future instream water right for the Walla Walla River.
11. The licensee is required to provide a written annual report by February 15th of each year. This report will detail recharge testing. Reporting shall include, but is not limited to, the results of testing efforts that relate to water quality, water quantity, and operations. Water level data shall be submitted in a Department-specified digital format. The licensee shall consult with ODEQ and OWRD to identify additional specific reporting elements. The first report is due in February 2014. The annual report shall be sealed and signed by a professional(s) registered or allowed, under Oregon law, to practice geology.

NOTE: This water-use authorization is temporary. Applicants are advised that issuance of this final order does not guarantee that any permit for the authorized use will be issued in the future; any investments should be made with that in mind.

Issued March 11 2013



E. Timothy Wallin, Water Rights Program Manager, *for*  
Phillip C. Ward, Director

Enclosures - limited license

cc: Tony Justus, District 5 Watermaster  
Bill Duke, ODFW  
Phil Richerson, ODEQ  
File

If you need further assistance, please contact the Water Rights Section at the address, phone number, or fax number below. When contacting the Department, be sure to reference your limited license number for better service.

Remember, the use of water under the terms of this limited license is not a secure source of water. Water use can be revoked at any time. Such revocation may be prompted by field regulatory activities or many other reasons.

Water Rights Section  
Oregon Water Resources Department  
725 Summer Street NE, Suite A  
Salem OR 97301-1271  
Phone: (503) 986-0817      Fax: (503) 986-0901

# FISH SCREENING CRITERIA FOR WATER DIVERSIONS

This summary describes ODFW fish screening criteria for all fish species.

**Screen material openings for ditch (gravity) and pump screens** must provide a minimum of 27% open area:

**Perforated plate:** Openings shall not exceed 3/32 or 0.0938 inches (2.38 mm).

**Mesh/Woven wire screen:** Square openings shall not exceed 3/32 or 0.0938 inches (2.38 mm) in the narrow direction, e.g., 3/32 inch x 3/32 inch open mesh.

**Profile bar screen/Wedge wire:** Openings shall not exceed 0.0689 inches (1.75 mm) in the narrow direction.

**Screen area** must be large enough to prevent fish impact. Wetted screen area depends on the water flow rate and the approach velocity.

**Approach velocity:** The water velocity perpendicular to and approximately three inches in front of the screen face.

**Sweeping velocity:** The water velocity parallel to the screen face.

**Bypass system:** Any pipe, flume, open channel or other means of conveyance that transports fish back to the body of water from which the fish were diverted.

**Active pump screen:** Self cleaning screen that has a proven cleaning system.

**Passive pump screen:** Screen that has no cleaning system other than periodic manual cleaning.

**Screen approach velocity for ditch and active pump screens** shall not exceed 0.4 fps (feet per second) or 0.12 mps (meters per second). The wetted screen area in square feet is calculated by dividing the maximum water flow rate in cubic feet per second (1 cfs = 449 gpm) by 0.4 fps.

**Screen sweeping velocity for ditch screens** shall exceed the approach velocity. Screens greater than 4 feet in length must be angled at 45 degrees or less relative to flow. An adequate bypass system must be provided for ditch screens to safely and rapidly collect and transport fish back to the stream.

**Screen approach velocity for passive pump screens** shall not exceed 0.2 fps or 0.06 mps. The wetted screen area in square feet is calculated by dividing the maximum water flow rate by 0.2 fps. Pump rate should be less than 1 cfs.

*For further information please contact:*

Bernie Kepshire  
Oregon Department of Fish and Wildlife  
7118 NE Vandenberg Avenue  
Corvallis, OR 97330-9446  
(541)757-4186 x255  
bernard.m.kepshire@state.or.us

**APPENDIX C – LL-1433 SOURCE AND GROUNDWATER MONITORING PLAN  
(WITHOUT APPENDICES)**

---

**Hydrogeologic Setting and  
Source Water and Groundwater  
Monitoring and Reporting Plan for the  
Hudson Bay District Improvement Company  
Multi-Site Alluvial Aquifer Limited License Application LL1433,  
Umatilla County, Oregon**



**Prepared for:**

**Walla Walla Basin Watershed Council and Hudson Bay District Improvement Company**

**Prepared by:**

**GSI Water Solutions, Inc.**


**Draft Plan – January, 3rd 2013**

**Hydrogeologic Setting and  
Source Water and Groundwater  
Monitoring and Reporting Plan for the  
Hudson Bay District Improvement Company  
Multi-Site Alluvial Aquifer Limited License Application LL1433,  
Umatilla County, Oregon**

**Walla Walla Basin Watershed Council  
810 S. Main St., Milton-Freewater, OR 97862**

**And**

**GSI Water Solutions, Inc.  
8019 W. Quinault Ave., Suite 201  
Kennewick, WA 99336**

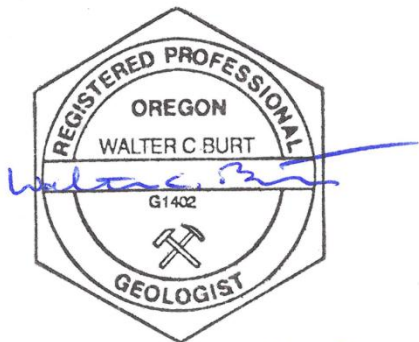

*Expires 05/31/2013*

## Contents

|  |    |
|--|----|
| Introduction.....  | 1  |
| Aquifer Recharge Sites and Project Goals .....   | 2  |
| Project Goals.....   | 2  |
| Hulette Johnson.....   | 2  |
| Anspach .....  | 2  |
| Trumbull .....   | 3  |
| NW Umapine .....   | 3  |
| Barrett .....  | 3  |
| Dugger .....   | 4  |
| ODOT .....   | 4  |
| Walla Walla Basin Hydrogeologic Setting.....   | 4  |
| Hydrostratigraphy .....  | 4  |
| Quaternary Units .....   | 4  |
| Mio-Pliocene Strata .....  | 5  |
| Top of Basalt .....  | 6  |
| Alluvial Aquifer Hydrogeology.....   | 6  |
| Aquifer Properties .....   | 7  |
| Groundwater Level and Flow Direction.....  | 7  |
| Aquifer Recharge and Discharge .....   | 8  |
| Alluvial Aquifer Water Quality.....  | 8  |
| Recharge Site Hydrogeology .....   | 9  |
| Hulette Johnson.....   | 9  |
| Anspach .....  | 10 |
| Trumbull .....   | 10 |
| NW Umapine .....   | 11 |
| Barrett .....  | 11 |
| Dugger .....   | 12 |
| ODOT .....   | 12 |
| Proposed Monitoring Plan.....  | 12 |
| Water Quality Monitoring .....   | 13 |
| Water Sample Collection and Analysis for Field Parameters, Cation/Anions, and Metals ..... | 13 |
| SOC Sample Collection and Analysis.....  | 14 |
| Source Water Quality Monitoring Locations .....  | 14 |
| Groundwater Quality Monitoring Locations .....   | 15 |

|  |    |
|--|----|
| Flow and Water Level Monitoring.....   | 15 |
| Surface Flow Monitoring .....  | 15 |
| Groundwater Level Monitoring.....  | 16 |
| Sampling and Analysis procedures.....  | 16 |
| Water Level Measurements .....   | 16 |
| Water Sampling Equipment .....   | 16 |
| Decontamination.....   | 17 |
| Water Quality Sampling Procedures .....  | 17 |
| Low Flow Sampling Protocol .....   | 17 |
| Sample Collection.....   | 18 |
| Sample Preservation and Holding Time .....   | 18 |
| Resampling .....   | 18 |
| Chain of Custody and Sample Handling.....  | 18 |
| Quality Assurance and Quality Control (QA/QC).....   | 19 |
| Reporting.....   | 19 |
| References cited.....  | 19 |
| Figures .....  | 21 |
| Appendix A – Review of Previously Collected Source Water and Groundwater Quality Data from Alluvial<br>Aquifer Recharge Projects in the Walla Walla Basin, Washington and Oregon |    |
| Appendix B – Surface Water Monitoring in the Walla Walla Basin 2010-2011   |    |
| Appendix C – Shallow Aquifer Monitoring in the Walla Walla Basin 2010-2011   |    |
| Appendix D – Shallow Aquifer Well Information  |    |
| Appendix E – Aquifer Recharge as a Water Management Tool: Hudson Bay Recharge Testing Site Report<br>(2004-2009)   |    |
| Appendix F – Application and Supporting Documents for Limited License LL-1189  |    |
| Appendix G –WWBWC Watershed Monitoring Program Standard Operating Procedures (DRAFT)   |    |



## INTRODUCTION

This document was prepared to fulfill certain requirements in Oregon Administrative Rules (OAR) 690-350-0110 through 0130 in support of the application for artificial recharge (AR) Limited License LL1433. The Hudson Bay District Improvement Company (HBDIC) is the owner of the project, which will be jointly managed with the Walla Walla Basin Watershed Council (WWBWC). The application for Limited License LL1433 was submitted to the Oregon Water Resources Department (OWRD) in September 2012. The HBDIC project includes up to seven recharge facilities located at different sites. Because of the unique nature of this project with distributed recharge facilities, as well as the availability of a body of information from other related or nearby recharge projects, OWRD staff requested that the applicant provide a summary compilation of the hydrogeologic information relevant to the overall project area and specific recharge sites, as well as a monitoring plan for the AR project. This document has been prepared in response to OWRD's request.

The objectives of the document are three-fold: (1) summarize the hydrogeologic setting of the recharge sites listed in the application for LL1433, (2) present a proposed source water and groundwater monitoring plan and (3) present a proposed water level monitoring plan (groundwater and surface water). All of these document elements were prepared in support of the Limited License application. The project described in this document and to be permitted under LL1433 is a multi-site aquifer recharge (AR) project. The recharge sites included in this project are referred to as Anspach, Trumbull, Hulette Johnson, NW Umapine, Dugger, Barrett, and ODOT (Figure 1). At this time only one of these sites, Hulette Johnson, is active. Pilot testing at the other sites will be initiated as the HBDIC and WWBWC are able to complete infrastructure improvements necessary to operate the sites. Current information regarding each of the seven sites, including recharge facilities, local hydrogeologic conditions and proposed monitoring, are summarized in this report.

Water quality data collected from three active sites (Hewlett-Johnson, Stiller Pond and Locher Road) and one inactive site (Hall-Wentland) in the greater Walla Walla Basin have shown that AR activities conducted to-date in the Walla Walla Basin have not lead to degradation of the alluvial groundwater system (GSI, 2009a, 2009b; WWBWC, 2010). Given this, the dispersed nature of the individual AR sites, and the common source water for this proposed program, the monitoring approach described herein focused on evaluating the effects of each recharge season on water quality using a dispersed, but integrated, monitoring network.

The balance of this document includes the following:

1. A summary of AR sites to be covered under LL1433 and project goals.
2. A description of alluvial aquifer hydrogeology in the project area and immediate vicinity of each site.
3. The scope of the proposed monitoring effort, including:
  - a. Proposed number, locations, and physical characteristics of monitoring points.
  - b. Constituents to be monitored for.
  - c. Sample collection frequency.
4. Quality assurance and quality control (QA/QC) elements.
5. Reporting.

## **AQUIFER RECHARGE SITES AND PROJECT GOALS**

### **Project Goals**

The overarching goal of the proposed aquifer recharge projects is to restore and maintain the shallow alluvial aquifer for the benefit of people, the environment and wildlife. Specific goals of the projects include: (1) stopping and reversing the declines seen in the shallow alluvial aquifer system throughout the Walla Walla Valley, (2) reducing the hydraulic gradient away from streams and creeks in the valley to reduce surface water seepage, especially during dry summer months, and (3) restoring flows to springs that have either dried up or have reduced flow. .

Recharge planned to be conducted under Limited License LL1433 will occur at seven separate sites shown in Figure 1. Of the seven sites listed under LL1433, one is currently active. The active site, Hulette Johnson (also commonly referred to in the past as the Hudson Bay site) has been actively monitored for several years while operating under limited license LL1189, which is still in effect. This section summarizes the basic physical layout and planned sequencing of construction and operation of each of the seven sites.

### **Hulette Johnson**

The Hulette Johnson site is an operational recharge site consisting of a combination of infiltration basins and infiltration galleries. The recharge capacity of the site ranges between 15 to 18 cubic feet per second (cfs). The site is located between County Road 650 and Hogden Road in SE ¼, SW ¼, Sec. 33, T6N, R35E, northwest of Milton-Freewater, OR (Figures 1, 2 and 3). There are 7 wells on or very near the site, including: 3 up-gradient wells (GW40, GW39 and GW41), one mid-site well (GW45), and 5 down-gradient wells (GW35, GW46, GW47, GW48, and GW118). Wells GW45, GW46, GW47, and GW48 are purpose-built monitoring wells which were drilled and constructed as a part of the original operation of the site several years ago. These wells have been used at various times for water quality monitoring and as part of the basin-wide WWBWC water level monitoring network. The other wells noted here also have been used in the basin-wide water level monitoring network. The Hulette Johnson site will be operated during the 2012/2013 recharge season under the existing limited license LL1189 until issuance of LL1433.

Recharge source water is delivered to the site from the White Ditch. Water delivery and infiltration basin operation is managed by HBDIC. The infiltration galleries are managed by the WWBWC.

### **Anspach**

The Anspach site is currently under construction and will be brought into use in late 2012, pending issuance of the new limited license. The Anspach site is planned to consist of an approximately 5 cfs infiltration gallery located east of Winesap Road in NW ¼, NW ¼, Sec. 30, T6N, R35E, just outside of Milton-Freewater, OR (Figures 1, 2, and 4). There is an existing well (GW135) located at the up-gradient, southeastern corner of the proposed site. A second existing well (GW23) is located generally down gradient of, and west southwest of, the proposed site. These are water wells that have been adapted for use in the basin-wide water level monitoring network. A purpose-built monitoring well, designated PMW2, is currently proposed for the east side of the proposed site.

Recharge source water will be delivered by diverting from the HBDIC canal just west of where it crosses Old Milton Highway/Lamb Street. Water will flow through a pipeline either along the north or south

edge of the property to the south of the canal and then turn south to deliver water to the project property. HBDIC will be in charge of diverting recharge water to the site from the canal.

## **Trumbull**

The Trumbull site will consist of a 3 to 5 cfs infiltration gallery, which will be located between the Umapine Highway and Trumbull Road in NW ¼, SW ¼, Sec. 27, T6N, R34E northwest of Milton-Freewater, OR (Figures 1, 2, and 5). The Trumbull site will be brought into use in late 2012, pending issuance of the limited license. There are no existing monitoring wells located at the site. However, an existing purpose-built monitoring well (GW117) used in the basin-wide water level monitoring program is located approximately 0.3 to 0.4 miles east and up-gradient of the site. Two proposed purpose built wells, PMW3 and PMW4, currently are planned for locations generally 0.3 to 0.4 miles to the west and northwest of the Trumbull site (Figure 5). These locations are generally down gradient of the proposed site, and tentatively planned for installation in the autumn of 2012.

Recharge source water would be delivered to the site from the North Lateral into an infiltration gallery. HBDIC will be responsible for diverting water to the site.

## **NW Umapine**

The NW Umapine site is planned to consist of a 5 cfs infiltration basin located north of the Umapine-Stateline Road and west of State Road 332 in SW ¼, SE ¼, T6N, R34E just northwest of Umapine, OR (Figures 1, 2 and 6). The NW Umapine facility is anticipated to be brought on line in late 2012/early 2013, pending issuance of the limited license. The infiltration basin will be built in a previously excavated pit that exists on the site. Only a portion of the pit will be used as an infiltration basin. There are no monitoring wells or observation wells present on the site. Existing wells in the general area of the site include GW34, GW36, GW63, and GW119, all of which are part of the basin-wide water level monitoring network. GW119 is a purpose built monitoring well which the others are water wells which have been adapted for use in the water level monitoring network. Two new purpose built wells are proposed for the area of this site, PMW1 located to the south-southeast and PMW5 located just to the west.

Recharge source water would be diverted from the Richartz pipeline to the basin. HBDIC will manage water to the site by a turn out from the Richartz pipeline.

## **Barrett**

The proposed Barrett recharge facility will be located at a site between County Road 517 and Chuckhole Lane in SW ¼, SE ¼, Sec. 34, T6N, R35E, between the Anspach and Hewlett-Johnson sites (Figures 1, 2, and 7). The recharge facility is currently planned to consist of an infiltration gallery capable of 3 cfs of recharge, and is planned to be brought online in late 2012/early 2013. Only one well is in the immediate vicinity of this site, well GW62, which is located up gradient of the facility. This well is a water well adapted for use in the basin-wide water level monitoring program.

Recharge source water will be delivered from the Barrett pipeline into the currently proposed infiltration gallery. HBDIC will be responsible for operating the diversion into the site.

## **Dugger**

This proposed recharge facility will be located at a site between Phillips Road and Ringer Road in NW ¼, SE ¼, Sec. 30, T6N, R35E (Figures 1, 2, and 8). The site is planned to be brought into operation in late 2013/early 2014, and the final design of the site has not yet been determined. There are two existing monitoring wells near the site, both part of the basin-wide water level monitoring network. Well GW36 (a water well) is located just north of the proposed site, and likely transverse to the groundwater flow direction in the area. This well, and a more distal, existing, purpose-built monitoring well, GW119, also located transverse to the anticipated groundwater flow direction, would at a minimum have utility in tracking water level changes in the area of the proposed site. On new purpose built monitoring well is proposed for the site. It (PMW1) would be located just west of the proposed recharge facility.

Water will be diverted off the White Ditch to feed the project. HBDIC will manage water to the site by a turn out from the ditch.

## **ODOT**

The ODOT site is located SW ¼, NW ¼, Sec. 34, T6N, R35E (Figures 1, 2, and 9). The site is planned to be brought into operation in late 2013/early 2014. The facility is tentatively planned to consist of an infiltration basin. Water will be delivered to the site from the White Ditch, upstream of the Hulette Johnson site. Once the design for the site is finalized and planned monitoring points have been established, this monitoring plan will be amended to incorporate the updated information for the site.

## **WALLA WALLA BASIN HYDROGEOLOGIC SETTING**

The goal of this section is to present a summary of alluvial aquifer hydrogeologic conditions regionally and within area of the HBDIC multi-site AR project. This summary is intended to provide the physical framework, or context, for the planned monitoring. It is not intended to provide detailed information about the groundwater system of the Walla Walla Valley. In addition, it does not include a discussion or summary of the deeper basalt aquifer systems underlying the area. For more details of area hydrogeology, the reader is referred to Newcomb (1965), Barker and McNish (1976), GSI (2007, 2009a, 2009b) and WWBWC (2010) and other citations as presented herein.

## **Hydrostratigraphy**

Five alluvial sediment hydrostratigraphic units are mapped in the project area, including: (1) Quaternary fine unit, (2) Quaternary coarse unit, (3) Mio-Pliocene upper coarse unit, (4) Mio-Pliocene fine unit, and (5) Mio-Pliocene lower coarse unit. Figure 10 illustrates the stratigraphic relationships between the 5 mapped units and top of basalt. The following sections describe the basic physical characteristics of each suprabasalt sediment unit and top of basalt.

### **Quaternary Units**

#### ***Quaternary Fine Unit***

Newcomb (1965) and several subsequent investigators (Fecht and others, 1987; Busacca and MacDonald, 1994; Waitt and others, 1994) described a variety of Quaternary aged fine (clay/silt/fine sand dominated) units in the area of the Walla Walla Basin. Above elevations of approximately 1150 to 1200 feet above mean sea level (msl), these strata consist predominantly of loess. Isolated hills found on the valley floor and much of the upland area north of the Walla Walla River consist predominantly of Missoula flood deposited silt and sand referred to as the Touchet Beds. Reworked flood deposits and

loess form local accumulations of fine strata across the valley floor near major streams. These strata are grouped into a single unit referred to as the Quaternary fine unit. The thickness of this unit varies greatly, depending on local topography, depth of stream incision, and original depositional patterns.

Variation in unit thickness and its absence locally, especially along modern stream courses, likely reflects both depositional factors and post-deposition erosion. For example, the wide distribution of the Quaternary fine unit around the northern edge of the Basin primarily reflects widespread deposition followed by localized deep erosion along relatively, ephemeral stream courses. Conversely, the fact that the unit is thin to absent along major stream courses (notably the Touchet River, Walla Walla River, and Mill Creek) likely reflects, at least in large part, the erosive effects of these major streams incising into and removing Pleistocene Cataclysmic Flood deposits and eolian deposited fines.

### ***Quaternary Coarse Unit***

Uncemented and nonindurated sandy to gravelly strata is found in the shallow subsurface beneath much of the Basin. These gravelly deposits are basaltic, moderately to well bedded, have a silty to sandy matrix, and contain thin, local silt interbeds. These uncemented and nonindurated basaltic gravels generally are equivalent to Newcomb's (1965) younger alluvial sand and gravel and are referred to currently as the Quaternary coarse unit. This sequence of uncemented gravel is interpreted to record stream deposition in the Walla Walla Basin by streams draining off the adjacent Blue Mountains. These streams are inferred to include the ancestral courses of the modern stream drainage. Based on stratigraphic relationships the Quaternary coarse unit predates, is contemporaneous with, and post-dates Missoula flood deposits. Given this, the Quaternary coarse unit probably ranges in age from a few years old to as old as 1 million years or more.

Both depositional and erosional mechanisms can explain Quaternary coarse unit distribution. Its planar-tabular distribution in the Milton-Freewater area and the area beneath and east of Walla Walla probably reflects deposition in shallow, braided channel complexes on an active (or recently active) braid plain. To the west, elongate patterns may reflect gravel deposition down the topographically low axis of the Basin as it has existed in the recent geologic past (last 1 to 2 million years). The elongate areas where the unit is absent potentially reflect areas of non-deposition because of the absence of channels and/or post-depositional erosion. The highs and lows apparent in the top of this unit along the base of the Horse Heaven Hills are interpreted to be related to the deformation and uplift of these hills. During that uplift, the surface of the unit has been deformed, in some areas uplifted, in other areas, down-dropped.

### ***Mio-Pliocene Strata***

The primary basin-filling alluvial strata in the Basin include a sequence of indurated sand, gravel, siltstone, and claystone generally equivalent to Newcomb's (1965) old gravel and clay. Based on lithologic and stratigraphic relationships these indurated suprabasalt sediments are inferred to have a Miocene to late Pliocene age (10+ to ~3 million years old). These strata are subdivided into three mappable units – Mio-Pliocene upper coarse unit, Mio-Pliocene fine unit, and Mio-Pliocene basalt coarse unit.

### ***Mio-Pliocene Upper Coarse Unit***

The Mio-Pliocene upper coarse unit consists of a sequence of variably cemented sandy gravel, with a muddy to sandy, silicic to calcic matrix. This unit underlies much of the Walla Walla Basin. Field reconnaissance reveals thin, localized, discontinuous caliche at the top of these strata at some locations. Based on physical characteristics displayed by analogous strata in rare outcrops, field reconnaissance, and a small number of borehole log descriptions these strata are predominantly basaltic in composition and typically have a slightly too well developed red, red brown, and yellow brown color. The Mio-

Pliocene upper coarse unit generally is continuous beneath the entire Basin, being absent only in a few, relatively small areas.

Isopach data for this unit shows that it varies greatly in thickness, ranging from just a few feet thick to over 500 feet thick. The thickest accumulations of the unit tend to be along the southern edge of the Basin adjacent to the base of the Horse Heaven Hills where it generally ranges from 200 to more than 500 feet thick, and along the eastern edge of the Basin. The unit is interpreted to have been deposited predominantly in a braided stream system by the ancestral Walla Walla River, Mill Creek, and larger tributaries. These streams delivered large volumes of coarse detritus onto the basin floor as it subsided and the bounding uplands were uplifted. Generally, these streams merged into a single, main Walla Walla River ancestral stream that generally flowed to the west, much like the modern stream. In addition, faulting may also have played a role in unit distribution.

### ***Mio-Pliocene Fine Unit***

The Mio-Pliocene upper coarse unit generally is underlain by fine deposits variously described as silt, clay, sandy clay, and sandy mud having blue, green, gray, brown, and yellow colors. These strata are designated the Mio-Pliocene fine unit. This unit is thickest in the northeastern, north, central, and western Basin where it can range between 300 and 500 feet thick. These areas generally are located north and west of areas of thickest accumulation of the overlying Mio-Pliocene upper coarse unit. Depositional, erosional, and structural factors similar to those that are interpreted to affect the overlying unit also are interpreted to have had a role in controlling Mio-Pliocene fine unit distribution.

### ***Mio-Pliocene Basal Coarse Unit***

The basal coarse unit consists of arkosic-micaceous sand and silt in the basal portion of the Mio-Pliocene section directly overlying basalt. These strata form an interval several tens of feet to over 100 feet thick. This unit, with its distinctive arkosic mineralogy, is very different petrographically from other strata comprising the Mio-Pliocene sequence in the Basin. Because of this distinctive mineralogy, this unit is inferred to have been deposited by the ancestral Salmon-Clearwater River, which entered the Basin from the north.

### **Top of Basalt**

The alluvial sequence overlies the Columbia River Basalt Group (CRBG) beneath the entire basin area. The top of the CRBG, while irregular, forms the base of the alluvial sequence, and it generally appears to dip downwards off the highlands surrounding the Basin, in to the center of the Basin. Given this, the top of basalt in the Basin ranges from the ground surface around the basin margins, to a depth of over 800 feet near the center of the basin.

### **Alluvial Aquifer Hydrogeology**

Groundwater in the Walla Walla Basin region occurs in two principal aquifer systems: (1) the unconfined to confined suprabasalt sediment (“alluvial”) aquifer system which is primarily hosted by Mio-Pliocene conglomerate and Quaternary Coarse Unit, and (2) the underlying confined CRBG aquifer system (Newcomb, 1965).

The majority of the alluvial aquifer is hosted by Mio-Pliocene strata, although the uppermost part of the aquifer is found, at least locally, in the overlying Quaternary coarse unit. The alluvial aquifer is generally characterized as unconfined, but it does, at least locally, display evidence of confined conditions. Variation between confined and unconfined conditions within the aquifer system is probably controlled by sediment lithology (e.g., facies – coarse versus fine) and induration (e.g., cementation, compaction). Groundwater movement into, and through, the suprabasalt aquifer also is inferred to be controlled by

sediment lithology and induration. Generally, the deeper portions of the alluvial aquifer unit are more likely to exhibit confined conditions relative to the shallower portions of the aquifer.

### **Aquifer Properties**

Given the physical properties of the Quaternary coarse unit (non-indurated sand and gravel) versus those of the Mio-Pliocene upper coarse unit (e.g., finer matrix and the presence of naturally occurring cement), the Mio-Pliocene upper coarse unit probably has generally lower permeability and porosity than the Quaternary coarse unit. Consequently, suprabasalt aquifer groundwater flow velocities are inferred to be less where the water table lies within the Mio-Pliocene strata and/or the gradients are higher than where it lies within the younger, more permeable Quaternary strata. In addition, where the Quaternary coarse unit is saturated, this uncemented, high permeability gravel and sand may form preferred pathways for groundwater movement and areas of increased infiltration capacity in the shallow parts of the suprabasalt aquifer system.

Very little hydraulic property information is available for the alluvial aquifer system. Newcomb (1965) reports average effective porosity of 5 percent in his old gravel (i.e., the Mio-Pliocene upper coarse unit). Given the physical characteristics of the overlying Quaternary coarse unit, we suspect its average effective porosity is higher.

Basin-wide estimates of the hydraulic properties of alluvial aquifer system were made by Barker and Mac Nish (1976) as part of their effort to produce a digital model of this aquifer system. This modeling work used estimated hydraulic conductivity of  $1.5 \times 10^{-4}$  feet/second to  $7.6 \times 10^{-3}$  feet/second and transmissivity of 10,000 feet<sup>2</sup>/day to 60,000 feet<sup>2</sup>/day for the entire alluvial aquifer system. As with Newcomb's (1965) effective porosity estimate, we suspect hydraulic conductivity and transmissivity would be higher in saturated Quaternary coarse unit strata than in the saturated Mio-Pliocene upper coarse unit.

### **Groundwater Level and Flow Direction**

Recent efforts by the WWBWC have begun to build a picture of alluvial aquifer water level conditions in the eastern and southern Walla Walla Basin. This data is compiled and available online at WWBWC website at <http://www.wwbwc.org>. Figure 11 is a water table map for the basin built from these data. Based on these data, and earlier investigations the following basic observations relative to alluvial aquifer water level and flow direction can be made:

- Groundwater flow in the alluvial aquifer system generally is from east to west. Locally this flow may converge towards the Walla Walla River and other streams where the alluvial aquifer water table is higher than the stream. Where this occurs, streams are, in part, fed by groundwater discharge. However, along many reaches of the Walla Walla River and other streams in the Basin, the alluvial water table may at least locally be below the bed of the stream during some or all of the year. When and where this occurs, such stream reaches probably lose water to the alluvial aquifer, thus acting as a recharge source for groundwater.
- Water level within the alluvial aquifer varies seasonally. Barker and MacNish (1976, p. 25) determined that the month of January was the time of year when this aquifer is under the smallest amount of pumping stress and that water table most reflect unmodified conditions. In some portions of the Basin, seasonal changes in the water table elevation can be as great as 50 feet (Newcomb, 1965; Pacific Groundwater Group, 1995).

- Groundwater level declines have been ongoing for a number of years, although recent AR efforts have reversed these trends at least locally near existing sites, in particular the Hulette Johnson site (WWBWC, 2010 – attached as Appendix E).

### **Aquifer Recharge and Discharge**

Recharge to the alluvial aquifer is derived from infiltration of surface waters (e.g., where streams enter the basin), leakage from irrigation ditches, applied irrigation water, direct precipitation, and to a lesser extent leakage from the CRBG aquifer system (Newcomb, 1965; Barker and MacNish, 1976; Pacific Groundwater Group, 1995). The majority of this recharge probably occurs in the spring when streams flowing into the Basin reach peak discharges. Precipitation on parts of the Basin floor where the Quaternary coarse unit and older the Miocene-Pliocene upper coarse unit lie at, or near, the surface may also provide some natural recharge. Evaluation of these various sources of recharge to the alluvial aquifer suggests that direct precipitation and applied irrigation water are the dominant sources of recharge (Bauer and Vaccaro, 1990; Pacific Groundwater Group, 1995; WWBWC, 2010). With flood control and channelization of the Walla Walla River and smaller streams, natural recharge via infiltration from surface waters has probably decreased with continued development.

Artificial recharge of the alluvial aquifer from agricultural practices and water conveyance systems has become an important component of the Basin's hydrologic system since the 1920's and 1930's. This recharge is thought to have historically contributed water to at least some shallow water wells and springs (Newcomb, 1965; WWBWC, 2010). Artificial recharge probably occurs through irrigation ditch leakage and infiltration past the root zone in irrigated fields. With the advent of ditch/channel lining and reduction in the practice of flood irrigation, this type of recharge has probably decreased. Reduced natural and artificial recharge and pumping account for decreased alluvial aquifer water table levels. Decline in water table levels in-turn probably account for reduced spring flows and base level discharge to the Walla Walla River.

Discharge from the alluvial aquifer occurs in a number of ways, including direct discharge to streams, springs and seeps, pumped water wells, evapotranspiration, and localized leakage to the CRBG aquifer system (Newcomb, 1965; Barker and Mac Nish, 1976; Pacific Groundwater Group, 1995).

### **Alluvial Aquifer Water Quality**

Historical water quality data available include a groundwater quality report prepared by Richerson and Cole (2000) and source water and groundwater quality reporting done for several AR sites, including the Hulette Johnson site. Based on Richerson and Cole (2000), the Hulette Johnson site data (WWBWC, 2010), and groundwater quality data collected from other AR sites in the Walla Walla Basin (GSI, 2009a, 2009b) some basic observations with respect to alluvial aquifer water quality can be made, including the following:

- With respect to nutrient type constituents, including nitrate-N, TKN, phosphate, and ortho-phosphate water quality in the area generally has not been significantly degraded. In addition, the groundwater down gradient of AR sites generally show declines in constituent concentrations, which are interpreted to reflect dilution of ambient groundwater concentrations by lower concentration AR water.
- Other parameters, such as TDS, chloride, and electrical conductivity also commonly show evidence of down gradient reductions attributed to AR activities. These trends are interpreted as evidence of dilution of these parameters in groundwater by AR water.



- The synthetic organic compound (SOC) data indicate that AR operations have essentially no influence on SOC's present in groundwater.
- In addition to these observations, the Hall-Wentland data are instructive as they show the importance of natural leakage from surface waters (which typically are the same waters these AR sites use for source water) in influencing local groundwater chemistry.

## RECHARGE SITE HYDROGEOLOGY

Building on the preceding summary of basin wide hydrogeologic conditions, the following sections provide basic highlights of specific hydrogeologic conditions at each HBDIC project AR site. Geologic cross-sections for each site are built from the WWBWC's basin wide geologic and hydrogeologic model.

### Hulette Johnson

Figure 12 provides a geologic cross-section of the Hulette Johnson site. Geologic units present in the vicinity of the site are as follows:

- Quaternary fines unit: This unit is interpreted to be essentially absent from this site, although thin surface occurrences are present offsite to the west and east. In addition, excavation work during infiltration gallery construction revealed a thin, local surface silty-sand that could be assigned to this unit. Nevertheless, where present in the immediate area, the unit is generally less than 10 feet thick.
- Quaternary coarse unit: This unit forms the uppermost geologic unit across the site area (except for the localized fines noted in the preceding bullet). Beneath the site the unit generally is interpreted to be 20 to 30 feet thick.
- Mio-Pliocene upper coarse unit: This unit underlies the entire site area and is interpreted to range from approximately 120 to 200 feet thick.
- Mio-Pliocene fine unit: This unit also underlies the entire site area where it is interpreted to be approximately 250 to 350 feet thick, increasing to the west-northwest.
- Mio-Pliocene basal coarse unit: This unit is not present beneath the site
- Top of Basalt: Beneath the site the top of basalt generally deepens to the west-northwest, ranging from approximately 425 feet bgs to 600 feet bgs.

The hydrogeology of the Hewlett-Johnson site is better understood than the other sites because of its active status, and has been previously reported on in WWBWC (2010). The alluvial aquifer water table generally varies between the basal part of the Quaternary coarse unit and the upper part of the Mio-Pliocene upper coarse unit, rising and falling seasonally and in response to AR and canal operations. Depth to water varies seasonally from 10 to 50 feet bgs according to on-site monitoring wells. Groundwater flow at the site generally is towards the northwest. The table below shows water volumes delivered to the Hulette Johnson site for each recharge season (Nov-May).

| Recharge Season  |                    |                     |                    |                    |                    |                    |                       |                    |
|--|--------------------|---------------------|--------------------|--------------------|--------------------|--------------------|-----------------------|--------------------|
| Spring 2004  | 2004-2005          | 2005-2006           | 2006-2007          | 2007-2008          | 2008-2009          | 2009-2010          | 2010-2011             | 2011-2012          |
| ~410 Acre<br>Feet  | ~1870 Acre<br>Feet | ~ 2810 Acre<br>Feet | ~3230 Acre<br>Feet | ~2740 Acre<br>Feet | ~2840 Acre<br>Feet | ~3750 Acre<br>Feet | ~ 3700 Acre<br>Feet * | ~3970 Acre<br>Feet |
| * Data collected for the first two months of the 2010-2011 recharge season was erroneous and/or missing. Water volumes for the first two months have been estimated based upon the 2009-2010 & 2011-2012 seasons |                    |                     |                    |                    |                    |                    |                       |                    |

## **Anspach**

Figure 13 provides a geologic cross-section of the Anspach site. Geologic units present at the Anspach site are as follows:

- Quaternary fines unit: This unit is interpreted to not be present at the site, but it is mapped in the area just to the west where it is less than 1 foot to approximately 20-30 feet thick.
- Quaternary coarse unit: At the site this unit is interpreted to extend from the ground surface downwards approximately 60 to 70 feet.
- Mio-Pliocene upper coarse unit: This unit is approximately 70 feet thick in the immediate vicinity of the site. To the east it is interpreted to directly overlie basalt. To the west it overlies the Mio-Pliocene fine unit.
- Mio-Pliocene fine unit: This unit is mapped as pinching out directly beneath the site. Just to the west and northwest of the site it is interpreted to thicken, as the top of basalt gets deeper.
- Mio-Pliocene basal coarse unit: This unit is not present beneath the site
- Top of Basalt: The site is interpreted to overlie an area where the top of basalt gets deeper just a short distance to the west. At and beneath the eastern part of the site top of basalt may be as little as 100 feet below ground surface (bgs). To the west it is interpreted to be over 250 feet bgs.

The alluvial aquifer water table generally lies at or near the top of the Mio-Pliocene upper coarse unit. Depth to water varies from about 15-35 feet depending on season (irrigation/non-irrigation). Groundwater flow direction in the alluvial aquifer at this site is interpreted to generally be to the west-northwest.

## **Trumbull**

Figure 14 provides a geologic cross-section of the Trumbull site. Note, the specific location of the infiltration gallery currently envisioned for this site has yet to be determined. Geologic units present in the vicinity of the Trumbull site are as follows:

- Quaternary fines unit: This unit is only present in the area west of County Road 332. In that area it is less than 1 foot to approximately 15 feet thick.
- Quaternary coarse unit: This unit forms the uppermost geologic unit across the proposed site area where it is interpreted to range from 30 to 50 feet thick, thinning and pinching out to the west.
- Mio-Pliocene upper coarse unit: This unit underlies the entire site area and is interpreted to range from approximately 220 to 250 feet thick, thickening to the west.
- Mio-Pliocene fine unit: This unit also underlies the entire site area where it is interpreted to be approximately 300 feet thick.
- Mio-Pliocene basal coarse unit: This unit is not present beneath the site
- Top of Basalt: Beneath the site the top of basalt generally deepens to the west-northwest, ranging from approximately 550 feet bgs to 650 feet bgs.

The alluvial aquifer water table generally lies in the Quaternary coarse unit, resulting in the entire Mio-Pliocene upper coarse unit being saturated. In the immediate vicinity of the site depth to groundwater generally is 20 feet or less. However, a series of seasonal springs north of the site suggest groundwater in this area can be much shallower, at least seasonally. To the west, the depth to water is 45 feet bgs or

greater just to the east of this site in well GW117. The groundwater flow direction is interpreted to be to the west-northwest.

## **NW Umapine**

Figure 15 provides a geologic cross-section of the NW Umapine. Geologic units present in the vicinity of the site are as follows:

- Quaternary fines unit: This unit is interpreted to be present in the site area where it may be as much as 20 feet thick. However, at the site itself it is absent because it was removed during the excavation of the pit that will be used as the AR facility.
- Quaternary coarse unit: This unit is mapped to be present in the site area, but it is interpreted to be very thin, possibly less than 10 feet thick. As with the Quaternary fine unit, it is interpreted to be absent (as it was removed during digging) in the excavated pit which is planned as the AR facility.
- Mio-Pliocene upper coarse unit: This unit underlies the entire site area and is interpreted to range from approximately 200 to 250 feet thick. The existing pit identified as the candidate location for the infiltration basin is excavated into the top of the Mio-Pliocene upper coarse unit.
- Mio-Pliocene fine unit: This unit also underlies the entire site area where it is interpreted to be approximately 200 feet thick.
- Mio-Pliocene basal coarse unit: This unit is not present beneath the site
- Top of Basalt: Beneath the site the top of basalt generally lies at a depth of 500 feet bgs.

The depth to the alluvial aquifer water table is approximately 25 to 30 feet bgs (based on well GW34), which places the water table in the uppermost part of the Mio-Pliocene upper coarse unit.

## **Barrett**

Figure 16 provides a geologic cross-section of the Barrett site. Geologic units present in the vicinity of the site are as follows:

- Quaternary fines unit: This unit is interpreted to be absent beneath the site.
- Quaternary coarse unit: This unit is interpreted to underlie the entire site area, ranging from approximately 30 to 50 feet thick.
- Mio-Pliocene upper coarse unit: This unit also underlies the entire site area and is interpreted to range from approximately 110 to 130 feet thick.
- Mio-Pliocene fine unit: This unit also underlies the entire site area where it is interpreted to be approximately 100 to 120 feet thick.
- Mio-Pliocene basal coarse unit: This unit is not present beneath the site
- Top of Basalt: Beneath the site the top of basalt appears to dip to the west-northwest and it lies at depths of 240 to 260 feet.

Beneath the Barrett site, the alluvial aquifer water table appears to generally lie at, or near, the bottom of the Quaternary coarse unit, at a depth of approximately 30 to 35 feet bgs. The groundwater flow direction at the site is generally to the northwest.

## **Dugger**

Figure 17 provides a geologic cross-section of the Dugger site. Geologic units present in the vicinity of the site are as follows:

- Quaternary fines unit: This unit is interpreted to be present across most of the site area where it is interpreted to range from approximately 10 to 20 feet thick. Just to the south of the site the unit appears to pinch out.
- Quaternary coarse unit: This unit is interpreted to underlie the entire site area, ranging from approximately 20 to 30 feet thick.
- Mio-Pliocene upper coarse unit: This unit also underlies the entire site area and is interpreted to range from approximately 110 to 130 feet thick.
- Mio-Pliocene fine unit: This unit also underlies the entire site area where it is interpreted to be 300, or more, feet thick.
- Mio-Pliocene basal coarse unit: This unit is not present beneath the site
- Top of Basalt: Beneath the site the top of basalt appears to dip to the south, towards the Horse Heaven Hills. The top of basalt is interpreted to be approximately 475 to 525 feet bgs.

Beneath the Dugger site, the alluvial aquifer water table appears to generally lie at, or near, the bottom of the Quaternary coarse unit, at a depth of approximately 20 feet bgs. Although regional water level (Figure 11) shows groundwater flow to the west-northwest, Figure 17 suggests local water level may differ from this, at least at some times during the year. This will be evaluated further during site preparation work. If this flow direction proves to be correct, it is interpreted to be a local phenomenon.

## **ODOT**

Figure 18 provides a geologic cross-section of the ODOT site. Geologic units present in the vicinity of the site are as follows:

- Quaternary fines unit: The Quaternary fine unit is interpreted to be absent this site.
- Quaternary coarse unit: This unit is interpreted to be approximately 20 to 30 feet thick at the site.
- Mio-Pliocene upper coarse unit: This unit is interpreted to be as much as 200 feet thick at the site.
- Mio-Pliocene fine unit: This unit underlies the entire site area and is interpreted to be approximately 200 feet thick.
- Mio-Pliocene basal coarse unit: This unit is not present beneath the site
- Top of Basalt: Beneath the site the top of basalt is interpreted to the northwest, ranging from depths of approximately 400 to 475 feet.

Beneath the ODOT site the alluvial aquifer water table appears to generally occur within the upper part of the Mio-Pliocene upper coarse unit, at a depth of approximately 30 to 40 feet bgs. The direction of groundwater flow at the site is generally towards the northwest.

## **PROPOSED MONITORING PLAN**

This section presents the monitoring plan for the proposed multi-site AR limited license. This plan includes the following elements: source water and groundwater quality sampling and analysis, water

level monitoring, and recharge water flow rate measurements. The proposed plan focuses on the objective of assessing the impacts to alluvial aquifer groundwater of the entire multi-site AR program. The following sections explain how this monitoring approach would be implemented, locations and constituents proposed for monitoring, and other supporting information relative to the monitoring program.

## Water Quality Monitoring

Water quality monitoring for this multi-site AR project will integrate source water quality data from several locations in the canal delivery system with groundwater quality data collected from multiple locations to assess the impacts on area groundwater of the entire AR program. Under this programmatic approach individual AR facilities will be monitored to a greater or lesser extent in support of the entire program. This proposed programmatic approach was developed from evaluation of data from recharge projects in the region using similar source waters (Appendix A). Water quality sampling will be done for field parameters, cations, anions, metals, and synthetic organic compounds (SOC). Specifics regarding these are described in the following sections.

### Water Sample Collection and Analysis for Field Parameters, Cation/Anions, and Metals

Recharge source water and alluvial groundwater will be sampled twice during each recharge cycle for analysis of a select list of indicator constituents considered to be most representative of the potential for AR degradation of alluvial aquifer groundwater quality, based on recharge water sources, adjacent land uses, and a review of AR data collected to-date at several sites in the Walla Walla Basin. The list of proposed analytes for is assembled using data from previous and on-going AR operations in the region using similar source water. Basic elements of the water quality sampling and analysis include the following:

- Samples will be collected at monitoring points listed in the following sections twice each recharge cycle: (1) within one week of the start of recharge operations, and (2) within one week after termination of each recharge season, commonly in May.
- Each sample will be analyzed for the following constituents: pH, temperature, electrical conductivity, dissolved oxygen, nitrate-N, TKN, sulfate, chloride, calcium, alkalinity, ortho-phosphate, sodium, total organic carbon, potassium, aluminum, magnesium, iron (dissolved), and manganese (dissolved). Table 1 lists these analytes and recommended analytical methods and method reporting limits.
- Turbidity, total dissolved solids, and total suspended solids data also will be collected to support operational goals, but not reported as a part of this monitoring plan.

**Table 1. Proposed analyte list, analytical methods, and method reporting limits.**

| Analyte                         | Analytical method | Method reporting limit (mg/L) |
|---------------------------------|-------------------|-------------------------------|
| pH                              | -                 | -                             |
| Temperature (°C)                | -                 | -                             |
| Electrical conductivity (mS/cm) | -                 | -                             |
| Dissolved oxygen (mg/L)         | -                 | -                             |
| Total organic carbon            | SM 5310B          | 0.5                           |
| Nitrate-N (mg/L)                | EPA 300.0         | 0.1                           |
| TKN (mg/L)                      | SM 4500 N B       | 0.1                           |
| Sulfate (mg/L)                  | EPA 300.0         | 0.1                           |

| Analyte                      | Analytical method | Method reporting limit (mg/L) |
|------------------------------|-------------------|-------------------------------|
| Chloride (mg/L)              | EPA 300.0         | 0.1                           |
| Alkalinity (mg/L)            | SM232OB           | 5                             |
| Calcium (mg/L)               | EPA 200.7         | 0.1                           |
| Ortho-phosphate (mg/L)       | EPA 300.0         | 0.1                           |
| Sodium (mg/L)                | SPA 200.7         | 0.1                           |
| Potassium (mg/L)             | EPA 200.7         | 0.1                           |
| Magnesium (mg/L)             | EPA 200.7         | 0.1                           |
| Aluminum (mg/L)              | EPA 200.7         | 0.01                          |
| Iron (dissolved) (mg/L)      | EPA 200.7         | 0.01                          |
| Manganese (dissolved) (mg/L) | EPA 200.7         | 0.05                          |

### SOC Sample Collection and Analysis

A single SOC alluvial groundwater sample will be collected each season. This sample will be collected within one week after termination of each recharge season, commonly in May. The same analyte list currently sampled for at the Hulette Johnson site is proposed for this monitoring plan. These are as follows:

- Rubigan (Fenarimol)
- Ridomil (Metalxyl)
- Systhane/Rally (Myclobutanil)
- Devrinol (Napropamide)
- DDD-DDE-DDT
- Elgetol (DNOC sodium salt)
- Alar/B-Nine (Daminozide)
- Lindane (Lindane)

### Source Water Quality Monitoring Locations

Source water quality sampling will be conducted at several locations in the canal and pipeline recharge water conveyance system. Source water monitoring sites will be in the distribution system at select locations up-stream of AR facilities. Specific source water monitoring locations, both existing and potential future locations, are shown on Figure 19 and are as follows:

- Source water monitoring location S-1 will be established in the White Ditch canal up-stream of the proposed diversion to the Anspach site. Samples from this location represent source water diverted to the Anspach site and the Barrett site. Also, this location is up-stream of all recharge sites and this is considered representative of overall source water conditions.
- Source water monitoring location S-2 will be established on the White Ditch canal immediately upstream of the proposed diversion for the ODOT and Trumball site. This site is representative of source water quality diverted to the Hulette-Johnson site, ODOT site, and the Trumball site.
- Source water monitoring point S-3 will be established at the up-stream end of the Richartz Pipeline to represent source water delivered to the NW Umapine site.

## **Groundwater Quality Monitoring Locations**

Groundwater quality monitoring will be conducted at monitoring points located to evaluate overall AR program impacts on up-gradient and down-gradient water quality for the multi-site AR project and also provide site-specific water quality data for specific AR locations to be operated under the proposed limited license.

Planned 2012/2013 recharge season groundwater monitoring locations (all in wells built to the monitoring well standard) and the general rationale for each are listed below and shown on Figure 2.

- PNW2: provides up gradient monitoring for the entire project and specifically for the Anspach and Barrett sites.
- GW46: provides down gradient monitoring for the Hulette Johnson site.
- GW117: provides water quality information for the central region of the AR program, and up gradient monitoring for the Trumbull site.
- PNW3: provides down gradient coverage for the Trumbull site.
- GW119: provides up gradient coverage for both the NW Umapine site and it would provide a programmatic monitoring location further down gradient than the aforementioned wells do.
- PMW5: provides down gradient monitoring for the NW Umapine site and it provides the furthest down gradient monitoring point in the entire program.
  - This well will be the sampling location for the proposed SOC sampling event at the conclusion of each recharge season.

Data from these 6 wells, when combined with the source water data collected at the three locations named in the preceding section will be used to interpret water quality impacts of the entire proposed AR program. As this program develops it is anticipated that these monitoring locations will be periodically re-evaluated and potentially modified. One modification would be the addition of proposed well PMW-1 to the area immediately down gradient of the Dugger site. This monitoring system could expand or contract as the number of individual AR sites covered by it changes, such as when new sites are added or old sites are decommissioned.

## **Flow and Water Level Monitoring**

### **Surface Flow Monitoring**

Flow monitoring will be done in the canals or pipes feeding each individual AR site. The objective of flow monitoring is to document the volumes of water delivered to each AR site during its operations. A flow monitoring point has already been established for the Hulette Johnson site, and it will continue to be used for this project. For the other sites these monitoring points will be established as each facility becomes operational.

Each aquifer recharge site will have either a rated intake structure (Hulette Johnson) or have a flow meter installed at the diversion from the irrigation canal (Anspach, Barrett, NW Umapine, ODOT, Trumbull). Water volume delivered to each site will be collected and stored by the WWBWC and reported to OWRD in a written annual report which will include digital data. See Figure 20 for surface water monitoring locations. See Appendix B for details on surface measurement protocols and data management.

## **Groundwater Level Monitoring**

The WWBWC currently maintains a water level monitoring program in the area of this project. Figure 2 shows the locations of wells in the WWBWC program in the project area and Figure 20 shows the WWBWC Oregon monitoring network. With the addition of 5 new wells shown on Figure 2, this project proposes to use the WWBWC water level monitoring program to track water level changes related to the proposed AR efforts. See Appendix C for groundwater level data and details on groundwater level monitoring protocols and data management.

Groundwater level monitoring locations provide useful information on aquifer recharge influences to the shallow aquifer. Wells were located to try to capture up-gradient to down-gradient influences from individual recharge projects. However, based upon limited funding and the spatial nature of the aquifer, it is not possible to have wells at every desired location. Wells in the water level network provide year round data for analysis of groundwater changes during recharge activities and also for longer term analysis of groundwater recovery (i.e. increased groundwater storage). Many of the wells used for monitoring have secondary hydraulic influences other than aquifer recharge. Wells located near the White Ditch show responses to ditch activity. A few wells may show draw down caused by pumping from other wells. See Appendix D for details on well locations (GPS coordinates) and UMAT numbers. Groundwater level data will be included in digital format with the written annual report.

## **SAMPLING AND ANALYSIS PROCEDURES**

The equipment needs and sampling procedures proposed for this investigation are provided in the following sections.

### **Water Level Measurements**

A static water level measurement will be obtained from each well prior to initiating water quality sampling. An electronic water level meter will be used to measure the depth to groundwater in each well to the nearest 0.01 foot. Static water levels must be measured prior to introducing any purging or sampling equipment in the well. Each measurement will be taken against the reference point located on top of the well casing. The static water levels in all wells should be measured on the same day for each site. Coordination with periodic sampling of other wells in the vicinity should be attempted.

### **Water Sampling Equipment**

Sampling will be conducted using the following specific equipment, as follows:

- Submersible pump (Grundfos or similar) or dedicated bailers/sampling line.
- Temperature measuring instrument.
- pH and specific conductivity meter(s) with calibration reagent.
- Water level meter (0.01 ft resolution).
- Shipping cooler(s) with ice packs or ice.
- Five gallon pail marked at the 5 gallon level, stopwatch.
- Laboratory supplied sample containers with appropriate preservatives.
- Tap water, deionized water, phosphate-free soap, cleaning brushes, log sheets or field notebook.
- Chain of custody forms.

Additional information relative to periodic and contingent sampling is described below.



## **Decontamination**

All non-disposable field equipment that may potentially come in contact with any soil or water sample shall be decontaminated in order to minimize the potential for cross-contamination between sampling locations. Thorough decontamination of all sampling equipment shall be conducted prior to each sampling event. In addition, the sampling technician shall decontaminate all equipment in the field as required to prevent cross-contamination of samples collected in the field. The procedures described in this section are specifically for field decontamination of sampling equipment.

At a minimum, field-sampling equipment should be decontaminated following these procedures:

- Wash the equipment in a solution of non-phosphate detergent (Liquinox<sup>®</sup> or equivalent) and distilled or deionized water. All surfaces that may come in direct contact with the samples shall be washed. Use a clean Nalgene and/or plastic tub to contain the wash solution and a scrub brush to mechanically remove loose particles. Wear clean latex, plastic, or equivalent gloves during all washing and rinsing operations.
- Rinse twice with distilled or deionized water.
- Dry the equipment before use, to the extent practicable.

## **Water Quality Sampling Procedures**

### **Low Flow Sampling Protocol**

The purpose of using low flow rates during low-flow purging is to avoid mobilization of formation solids and reduce purge volumes required to achieve collection of a sample representative of aquifer water quality. This technique is premised on minimizing drawdown of the aquifer and stabilization of field parameters prior to and during sample collection. Pump flow rates should be less than or equal to the yield of the well, so that a stabilized pumping water level is achieved as quickly as practical, in order to then expedite the stabilization of the indicator parameters.

Minimal-drawdown procedures should consist of evacuating the total volume of groundwater present in the sampling system to clear the well pump, tubing, and flow cell, if used, of any stagnant water left from prior sampling events. In general, a minimum of one (1) volume of the sampling system (i.e. pump, associated tubing, flow cell, etc.), must be purged. The maximum flow rate is determined by pumping at a rate, which allows for stabilization of the water level surface within the well. Field measurements should be initiated at the start of purging and continued at evenly spaced intervals until stabilization. Measurements of the indicator parameters must be taken at a frequency based on the time it takes to purge one (1) volume of the pump, associated tubing, and flow cell. For example, if the volume of the pump, associated tubing, and flow cell is 500 mL and the well is being purged at 250 mL/minute, the pump, associated tubing, and flow cell will be purged in two (2) minutes. Therefore, measurements must be taken at least two (2) minutes apart.

Purging will be continued until the final three consecutive measurements for each parameter agree to within 10% of each other prior to sample collection. Measurements should be taken at appropriate intervals during the purging process to determine stabilization. Once stabilization has been achieved, sampling can be conducted at the same rate.

Bailers may be used to collect samples from select wells if a suitable pump is not available or other circumstances require (e.g. if there is inadequate volume to use a pump). Bailers should be made of suitable inert materials (such as stainless steel, PVC, or Teflon), when monitoring for organic

compounds. PVC bailers with non-glued joints may also be used. When bailers are used, the bailer cord shall be fastened securely to the bailer and shall be constructed of nylon, stainless steel, or polypropylene, and be specifically manufactured for use in the collection of environmental samples. This cord must be new, clean, and in good condition. Care should be taken not to excessively disturb the column of water in the well casing. Gently lower the bailer into the well with each cycle. The sampler's knowledge of the depth to water will help in this regard. Attempt to lower the bailer into the water only to the extent necessary to fill or nearly fill the chamber. Avoid submerging the top of the bailer. Calibration records should be recorded on the sample collection forms and/or field notebook.

### **Sample Collection**

Samples are collected once water quality parameters have stabilized sufficiently to vary less than 10% between three consecutive readings. Groundwater samples should be collected in the shortest possible time subsequent to purging the well. Discharge from a bailer will be controlled to minimize agitation and aeration. Sample containers should be sealed with tape, labeled, and immediately placed in a cooler with ice. Sample containers should be filled completely to eliminate head space. Sample containers are provided by the analytical laboratory and should be requested at least one week in advance of the sampling. The containers should meet specifications for size, type, and preservatives for parameters analyzed and all shipping coolers should have chain-of-custody seals placed on them prior to shipping. Well identification will be omitted from all sample identifications numbers and laboratory paperwork so that all samples can be analyzed in the laboratory without reference to well identification.

### **Sample Preservation and Holding Time**

Samples should be stored immediately after collection in an ice chest containing sufficient ice to cool the samples to 4 degrees Celsius (°C). Use "blue ice" if possible. If water ice must be used, seal each bottle in a plastic bag. Make sure the ice is sealed in plastic bags too. Samples should remain cooled at 4°C and delivered to the laboratory within 24 hours of collection. Sample receipt at the laboratory must be sooner if analysis includes parameters with a shorter holding time. Care should be taken to prevent excessive agitation of samples or breakage/leakage of containers. Samples should be analyzed within the specified holding time for each constituent. One additional sample should be collected from one of the wells for quality control purposes. The well identification should be omitted from laboratory paperwork so the sample can be evaluated as a "blind duplicate."

### **Resampling**

If monitoring results indicates a significant increase in the concentration of a monitored parameter for a well, the well will be resampled within one week of the receipt of analytical results that show the significant change. An increase or decrease is significant when the change can be considered statistically significant. Determination of a significant change in groundwater concentration is customarily done either by assessing concentrations in relation to established concentration limits or by using a statistical analysis.

### **Chain of Custody and Sample Handling**

A chain-of-custody form will be completed and signed by the sampler on the day of sample collection. The chain-of-custody form must be signed by laboratory personnel upon receipt and any other individuals that maintain custody of the samples in the interim. An example chain-of-custody form is attached.

Coolers should be sealed and shipped or driven to the lab as soon as possible. The method of shipping (bus, next day air, etc.) is usually determined by the parameter having the shortest holding time. In any

case, shipping times of more than 24 hours should not be used as the cooler(s) may warm and compromise sample quality.

## **Quality Assurance and Quality Control (QA/QC)**

**Field Records:** All field notes, analytical results, and other pertinent data associated with the site should be maintained in a secure location and be archived for at least a five year period. Maintaining records will also facilitate tracking of environmental trends at the site.

**Data Validation:** Data validation for both field and lab QA/QC can be performed using a checklist. All pertinent information with respect to QA/QC will be checked. The following items are included:

- Completeness of field data sheets and observation (observations are used to check for potentially erroneous data)
- Completeness of chain-of-custody
- Holding times for all constituents
- Field blind duplicate results
- Laboratory method blanks, matrix spike, and matrix spike duplicates
- Surrogate percent recovery
- Completeness of laboratory quality control (duplicates, standards, QC samples)
- Comparisons between duplicates

Specific QA/QC guidance with respect to field blanks, field duplicates, and background data are summarized in the following bullets.

- Field blanks: Once per sampling event a blank sample with known concentrations of the monitored constituents will be included in the samples sent to the analytical laboratory. The field blank will be purchased from a scientific supply vender such as Hach.
- Field duplicates: Once per sampling event one additional sample will be collected from one of the wells for quality control purposes.

## **REPORTING**

Primary reporting for this monitoring plan will focus on annual reports completed following the end of each recharge season, per OWRD requirements for the limited license and AR projects. The basic goals of the annual reports will be to: (1) analyze the data to evaluate how trends related to AR operations are influencing groundwater quality and (2) based on the results of that analysis provide recommendations (if any) for adjustments to the monitoring program and AR operations. In addition to annual reporting the monitoring data collected as described herein will be provided to OWRD and ODEQ on a periodic basis to facilitate data transfer and project communications.

## **REFERENCES CITED**

Barker and McNish, 1976, Digital Model of the Gravel Aquifer, Walla Walla River Basin, Washington and Oregon: Washington Department of Ecology Water Supply Bulletin 45, 47 p.

Bauer, H.H., and Vaccaro, J.J., 1990, Estimates of ground-water recharge to the Columbia Plateau regional aquifer system, Washington, Oregon, and Idaho, for predevelopment and current land-use conditions: U.S. Geological Survey Water-Resources Investigations Report 88-4108, 37 p.

Busacca, A.J., and MacDonald, E.V., 1994, Regional sedimentation of Late Quaternary loess on the Columbia Plateau - sediment source areas and loess distribution pattern, in , Lasmanis, R., and Cheney, E.S., eds., Regional geology of Washington State: Washington Department of Natural Resources, Division of Geology and Earth Resources Bulletin 80, p. 181-190.

Fecht, K.R., Reidel, S.P., and Tallman, A.M., 1987, Paleodrainage of the Columbia River system on the Columbia Plateau of Washington State - a summary, in, Shuster, J.E., ed., Selected papers on the geology of Washington State: Washington Department of Natural Resources, Division of Geology and Earth Resources Bulletin 77, p. 219-248.

GSI, 2007, Geologic Setting of the Miocene (?) to Recent Suprabasalt Sediments of the Walla Walla Basin, Southeastern Washington and Northeastern Oregon: Report written for Walla Walla Basin Watershed Council and Washington Department of Ecology.

GSI, 2009a, Annual Report for the 2009 recharge season, Hall-Wentland shallow aquifer recharge site, Umatilla County, Oregon and Walla Walla County, Washington: Report prepared for Walla Walla Basin Watershed Council and Oregon Department of Water Resources.

GSI, 2009b, Results of the 2009 shallow aquifer recharge season at the Locher Road Site, Walla Walla County, Washington: Report prepared for Walla Walla Basin Watershed Council and Washington Department of Ecology.

Newcomb, R.C., 1965, Geology and ground-water resources of the Walla Walla River Basin, Washington and Oregon: Washington Department of Conservation, Division of Water Resources Water-Supply Bulletin 21, 151 p, 3 plates.

Pacific Groundwater Group, 1995, Walla Walla Watershed Initial Assessment: report written for the Washington Department of Ecology.


Richerson, P. and Cole, D., 2000, April 1999 Milton-Freewater groundwater quality study: Oregon Department of Environmental Quality, State-Wide Groundwater Monitoring Program, 17 p.

Waitt, R.B., Jr., O' Connor, J.E., and Benito, G., 1994, Scores of gigantic, successively smaller Lake Missoula floods through Channeled Scabland and Columbia valley, *in*, Swanson, D.A., and Haugerud, R.A., eds., Geologic field trips in the Pacific Northwest: Seattle, Washington, University of Washington Department of Geological Sciences, v. 1, p. 1k.1 - 1k.88.

WWBWC, 2010, Aquifer recharge as a water management tool: Hudson Bay recharge testing site report (2004-2009): Report prepared for Hudson Bay District Improvement Company and Oregon Department of Water Resources.

Figure 1.

# Point Of Diversion (POD) and Conveyance for the Application for Limited Water Use License

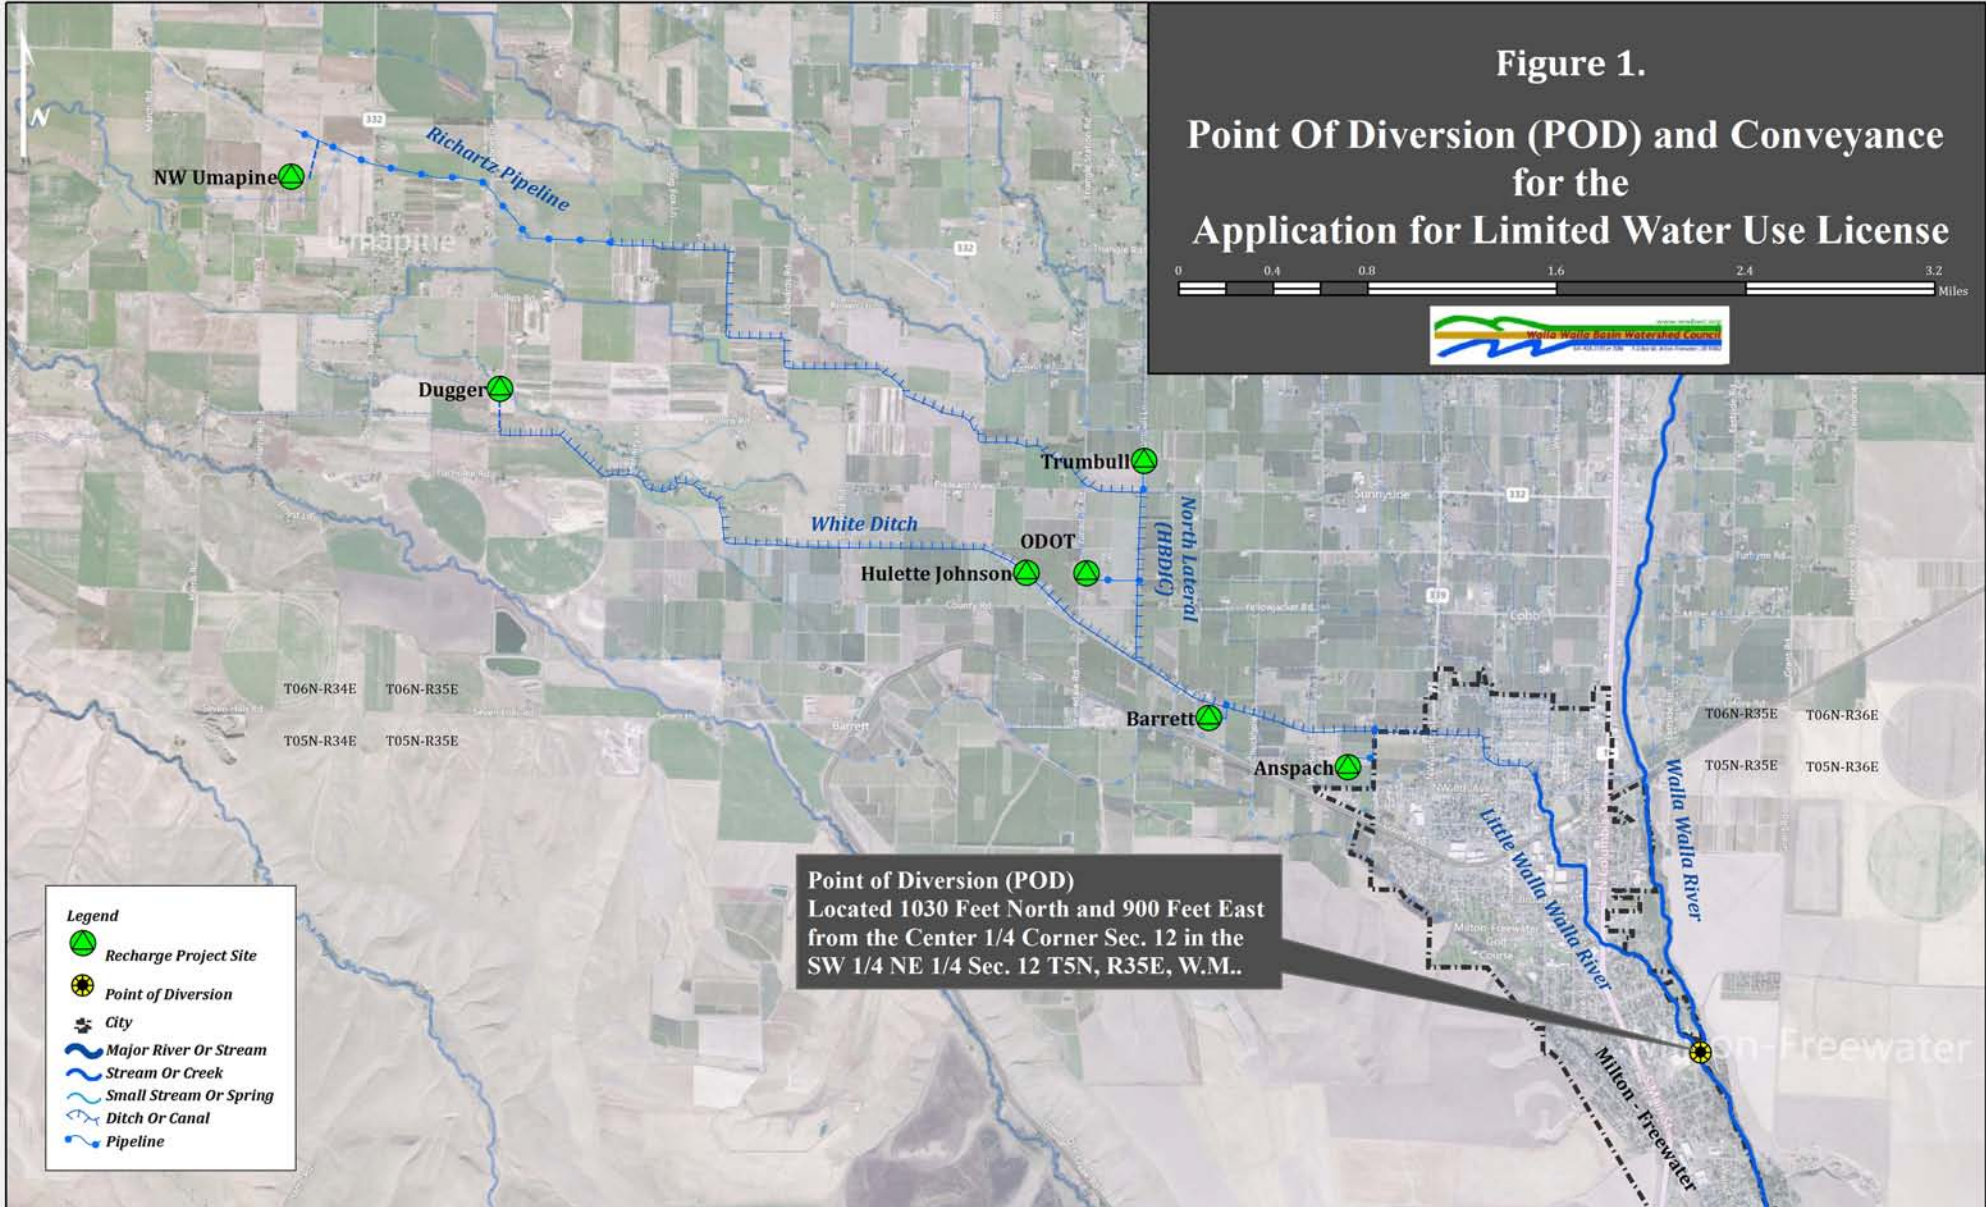


**Legend**

- Recharge Project Site
- Point of Diversion
- City
- Major River Or Stream
- Stream Or Creek
- Small Stream Or Spring
- Ditch Or Canal
- Pipeline

**Point of Diversion (POD)**  
Located 1030 Feet North and 900 Feet East  
from the Center 1/4 Corner Sec. 12 in the  
SW 1/4 NE 1/4 Sec. 12 T5N, R35E, W.M..


**Figure 2.**  
**Project Sites and Monitoring Wells**  
**for the**  
**Application for Limited Water Use License**

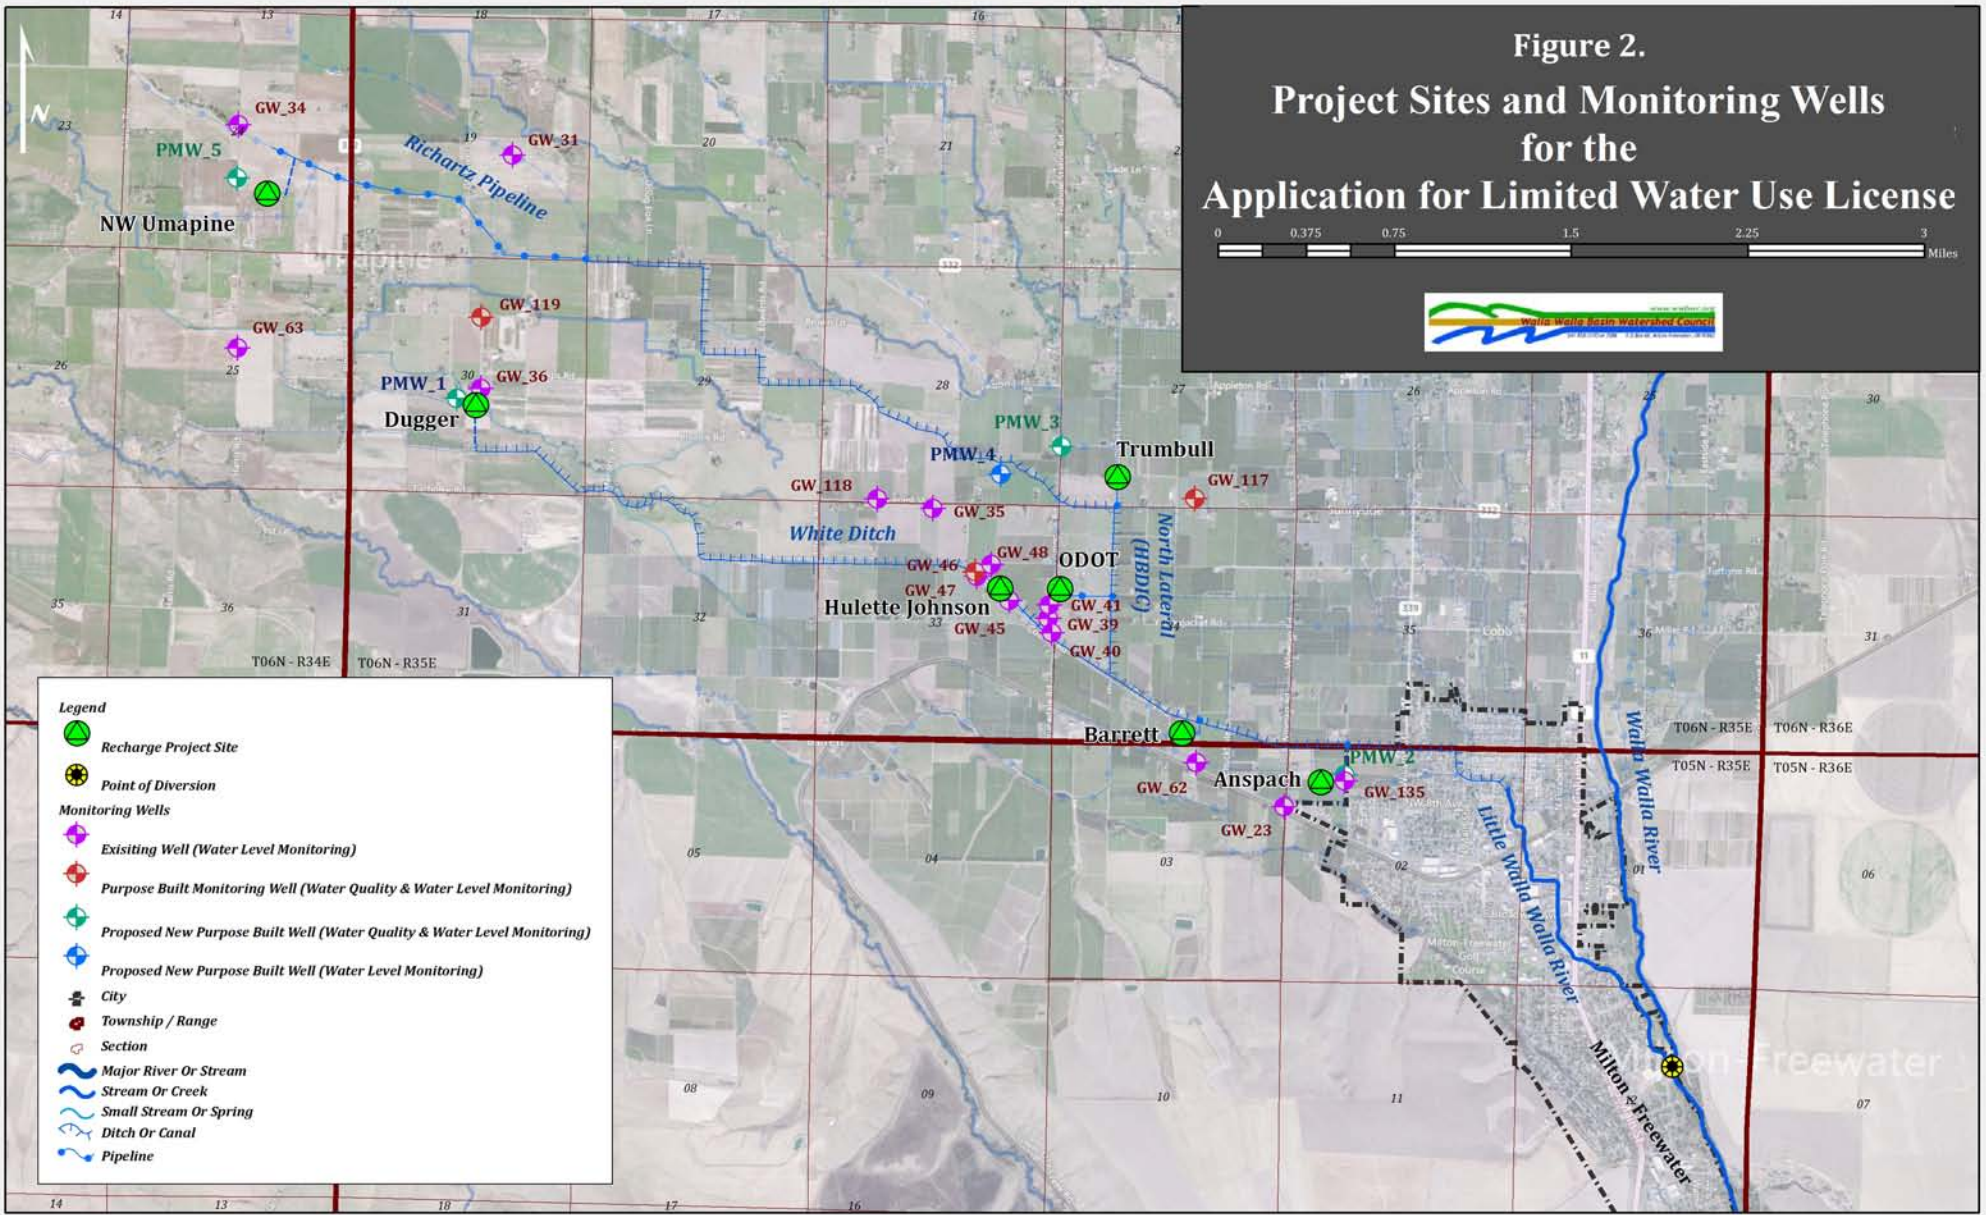

**Legend**

- Recharge Project Site
- Point of Diversion
- Monitoring Wells**
- Existing Well (Water Level Monitoring)
- Purpose Built Monitoring Well (Water Quality & Water Level Monitoring)
- Proposed New Purpose Built Well (Water Quality & Water Level Monitoring)
- Proposed New Purpose Built Well (Water Level Monitoring)
- City
- Township / Range
- Section
- Major River Or Stream
- Stream Or Creek
- Small Stream Or Spring
- Ditch Or Canal
- Pipeline


# Figure 3. Huletta Johnson Recharge Project

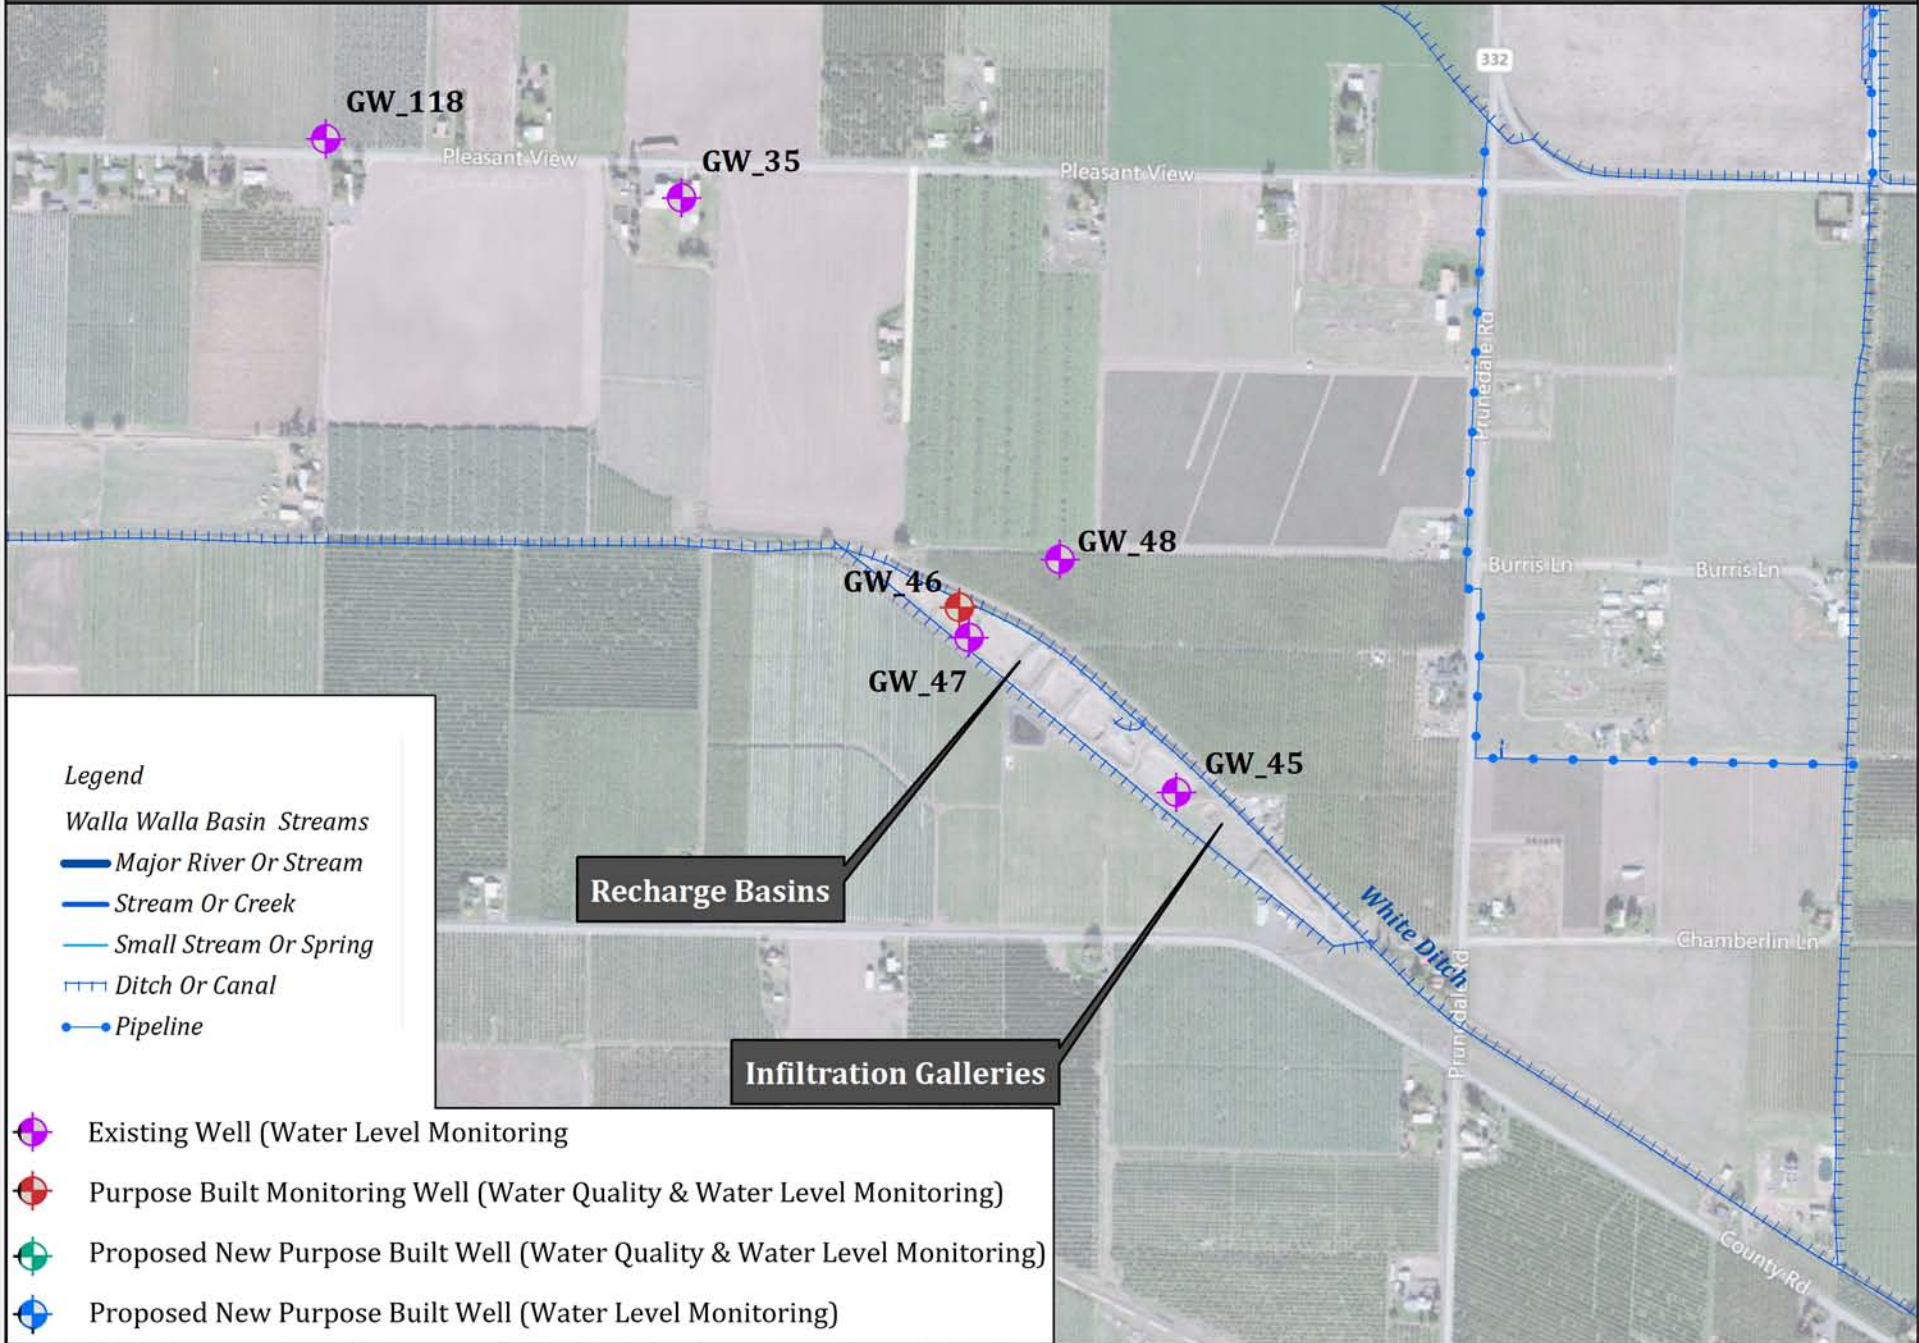

# Figure 4. Anspach Project Monitoring Wells




- Existing Well (Water Level Monitoring)
- Proposed New Purpose Built Well (Water Quality & Water Level Monitoring)

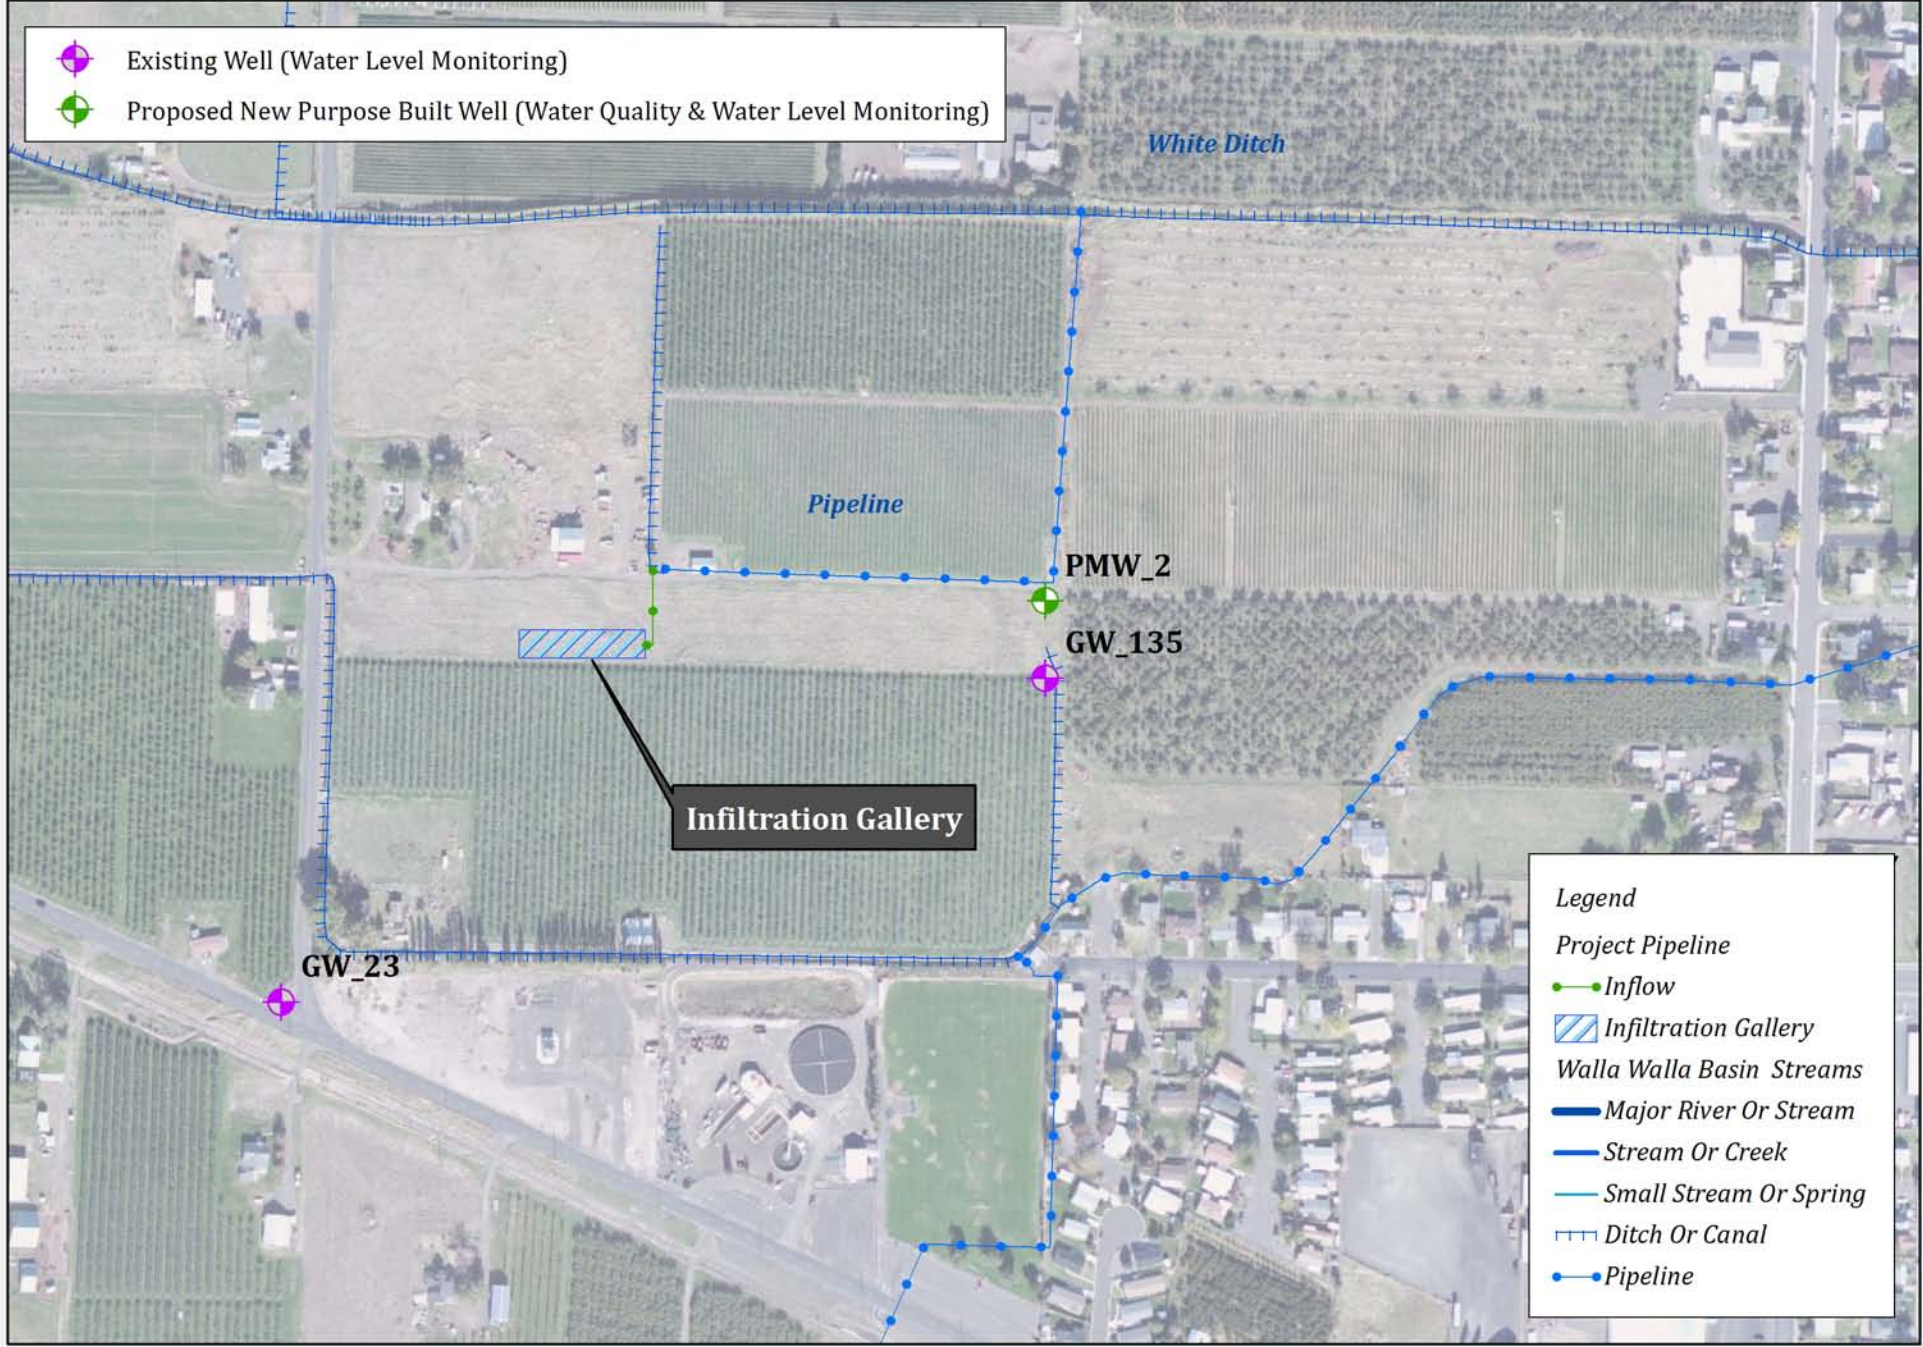

- Legend**
- Project Pipeline Inflow
  - Infiltration Gallery
  - Walla Walla Basin Streams
  - Major River Or Stream
  - Stream Or Creek
  - Small Stream Or Spring
  - Ditch Or Canal
  - Pipeline



# Figure 5. Trumbull Recharge Infiltration Gallery

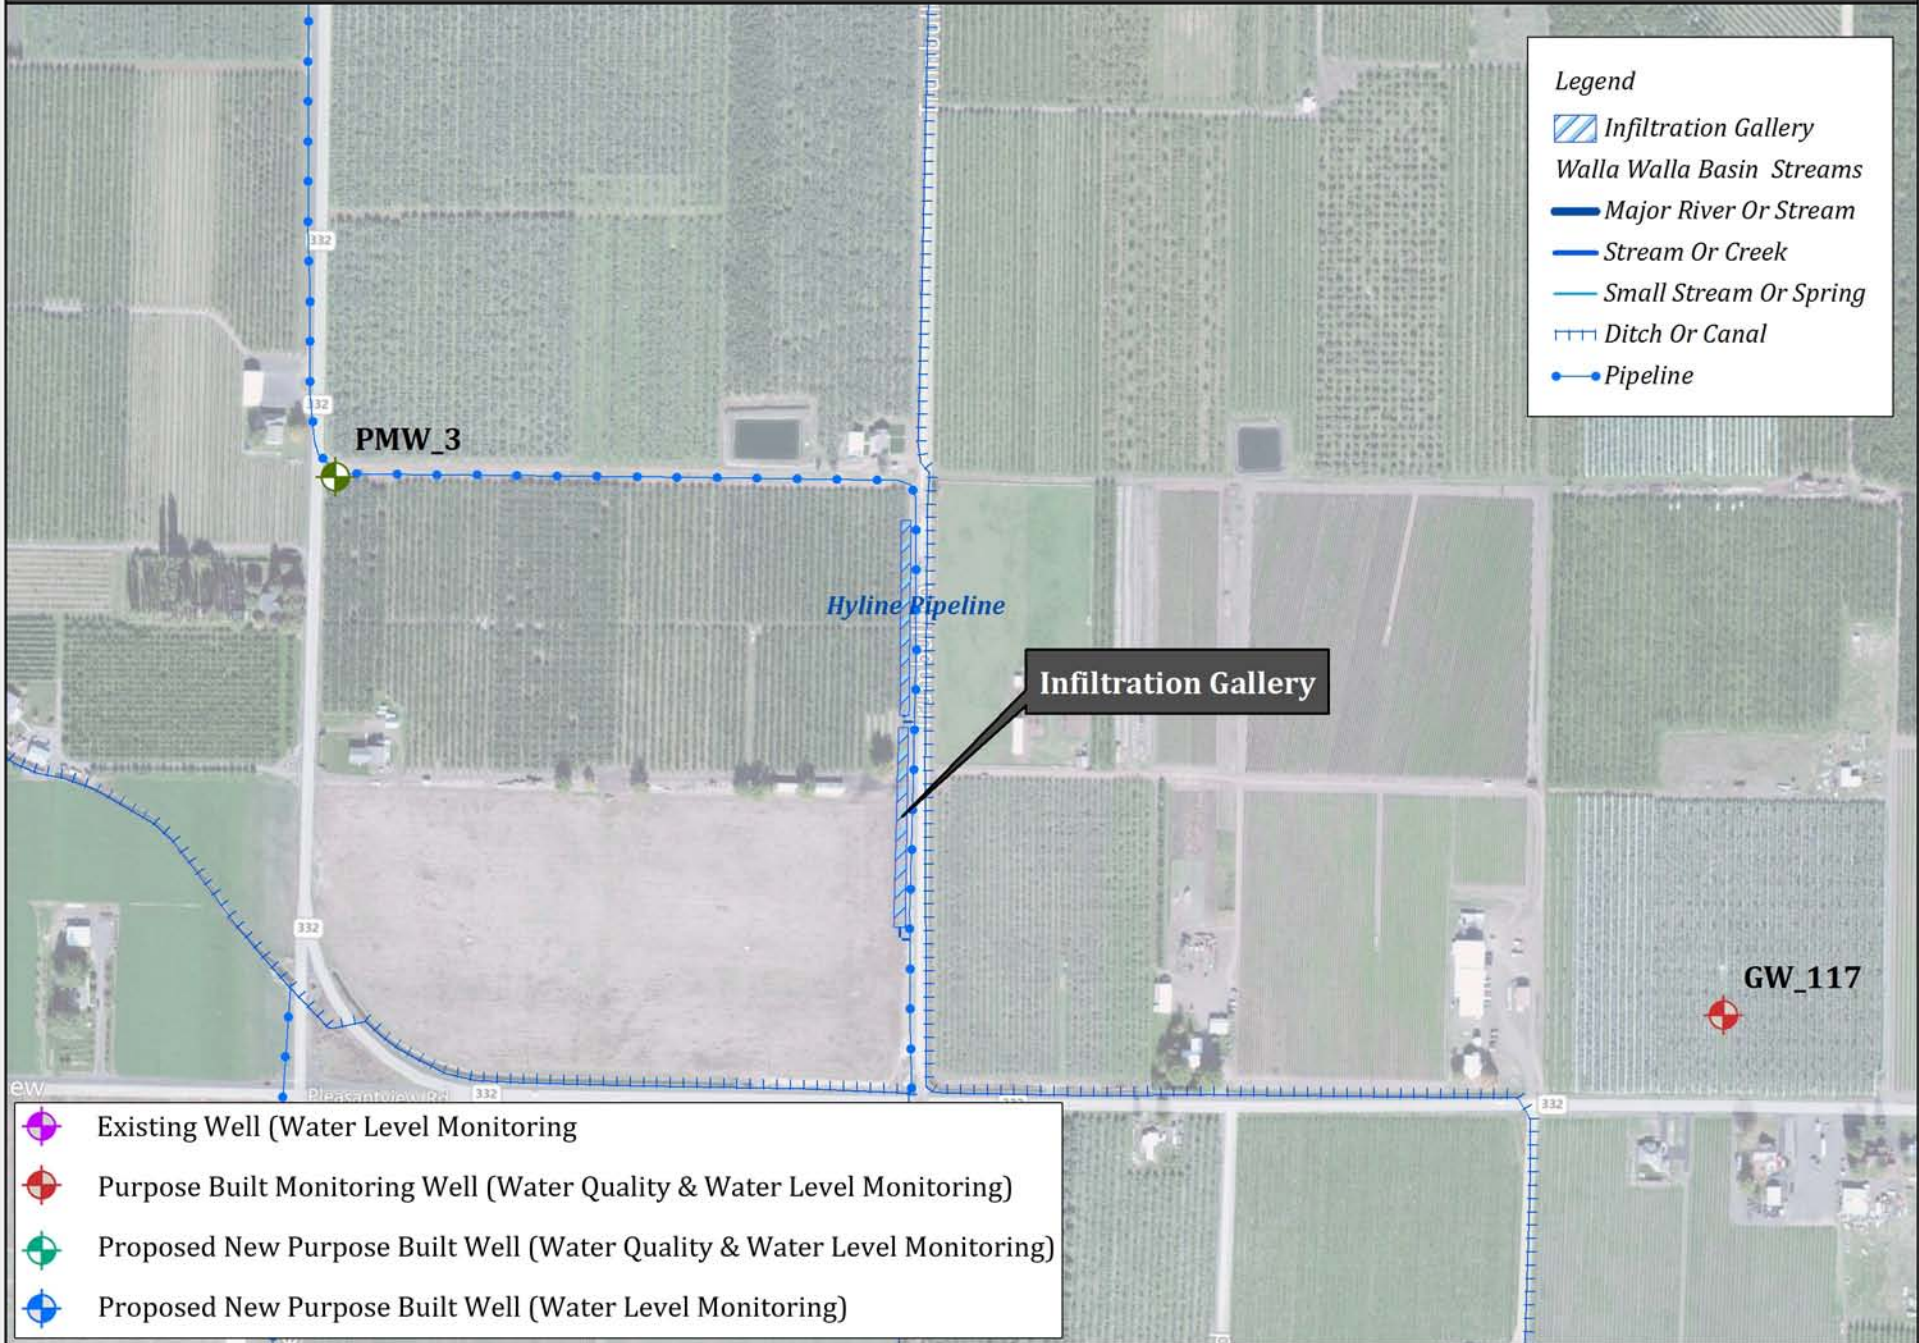

**Legend**


- Infiltration Gallery
- Walla Walla Basin Streams**
- Major River Or Stream
- Stream Or Creek
- Small Stream Or Spring
- Ditch Or Canal
- Pipeline

- Existing Well (Water Level Monitoring)
- Purpose Built Monitoring Well (Water Quality & Water Level Monitoring)
- Proposed New Purpose Built Well (Water Quality & Water Level Monitoring)
- Proposed New Purpose Built Well (Water Level Monitoring)

# Figure 6. NW Umapine Recharge Basin



- Legend**
- Project Pipeline
  - Recharge Basin
  - Infiltration Gallery
  - Walla Walla Basin Streams
  - Major River Or Stream
  - Stream Or Creek
  - Small Stream Or Spring
  - Ditch Or Canal
  - Pipeline

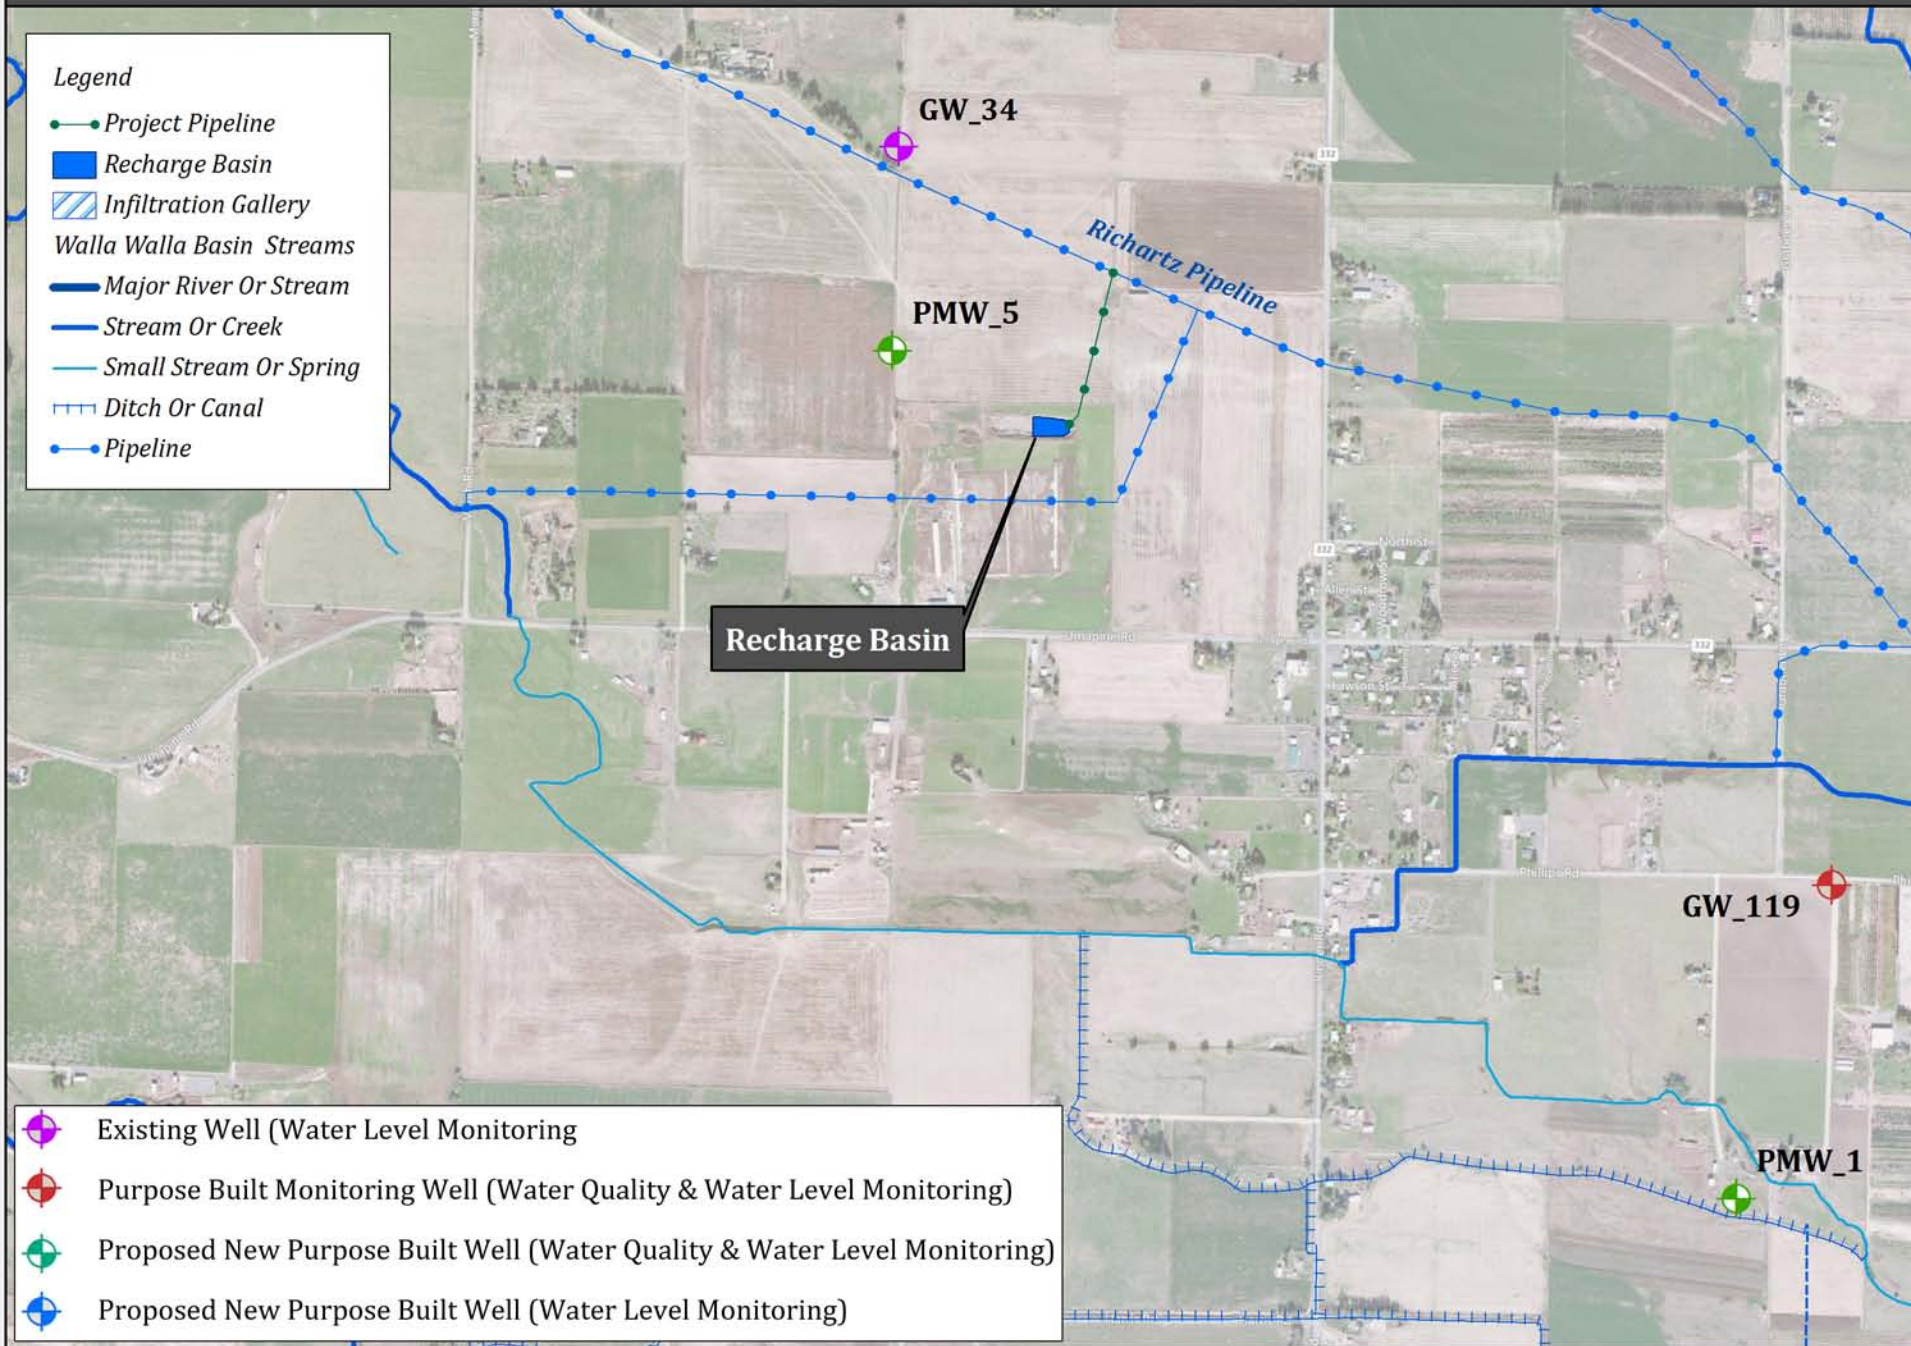


- Existing Well (Water Level Monitoring)
- Purpose Built Monitoring Well (Water Quality & Water Level Monitoring)
- Proposed New Purpose Built Well (Water Quality & Water Level Monitoring)
- Proposed New Purpose Built Well (Water Level Monitoring)

# Figure 7. Barrett Infiltration Gallery



**Legend**

- Infiltration Gallery
- Walla Walla Basin Streams**
- Major River Or Stream
- Stream Or Creek
- Small Stream Or Spring
- Ditch Or Canal
- Pipeline

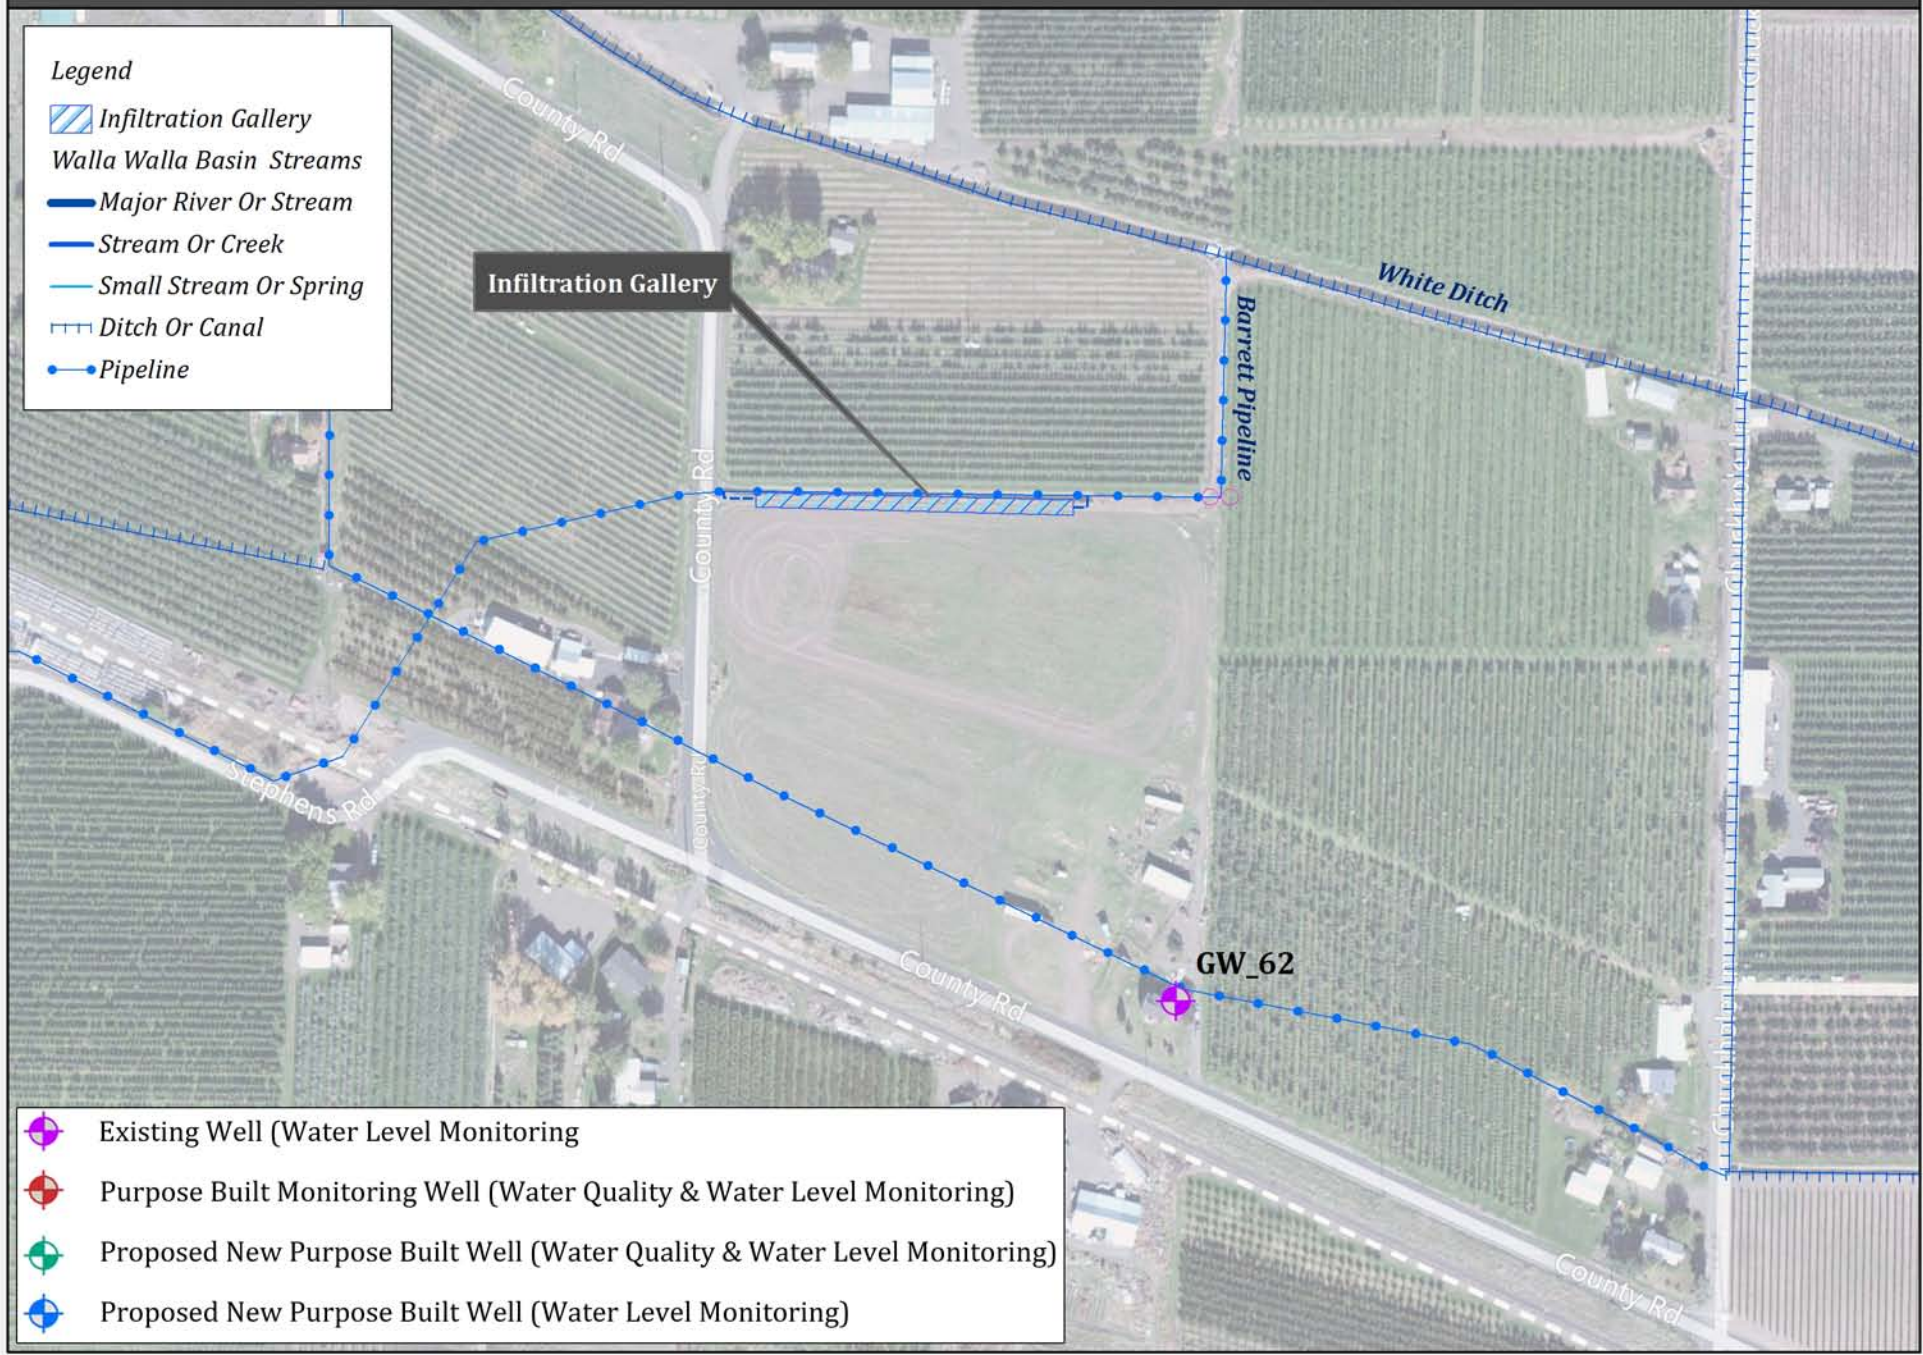


- Existing Well (Water Level Monitoring)
- Purpose Built Monitoring Well (Water Quality & Water Level Monitoring)
- Proposed New Purpose Built Well (Water Quality & Water Level Monitoring)
- Proposed New Purpose Built Well (Water Level Monitoring)

# Figure 8. Dugger Infiltration Gallery



**Legend**

- Infiltration Gallery
- Walla Walla Basin Streams**
- Major River Or Stream
- Stream Or Creek
- Small Stream Or Spring
- Ditch Or Canal
- Pipeline

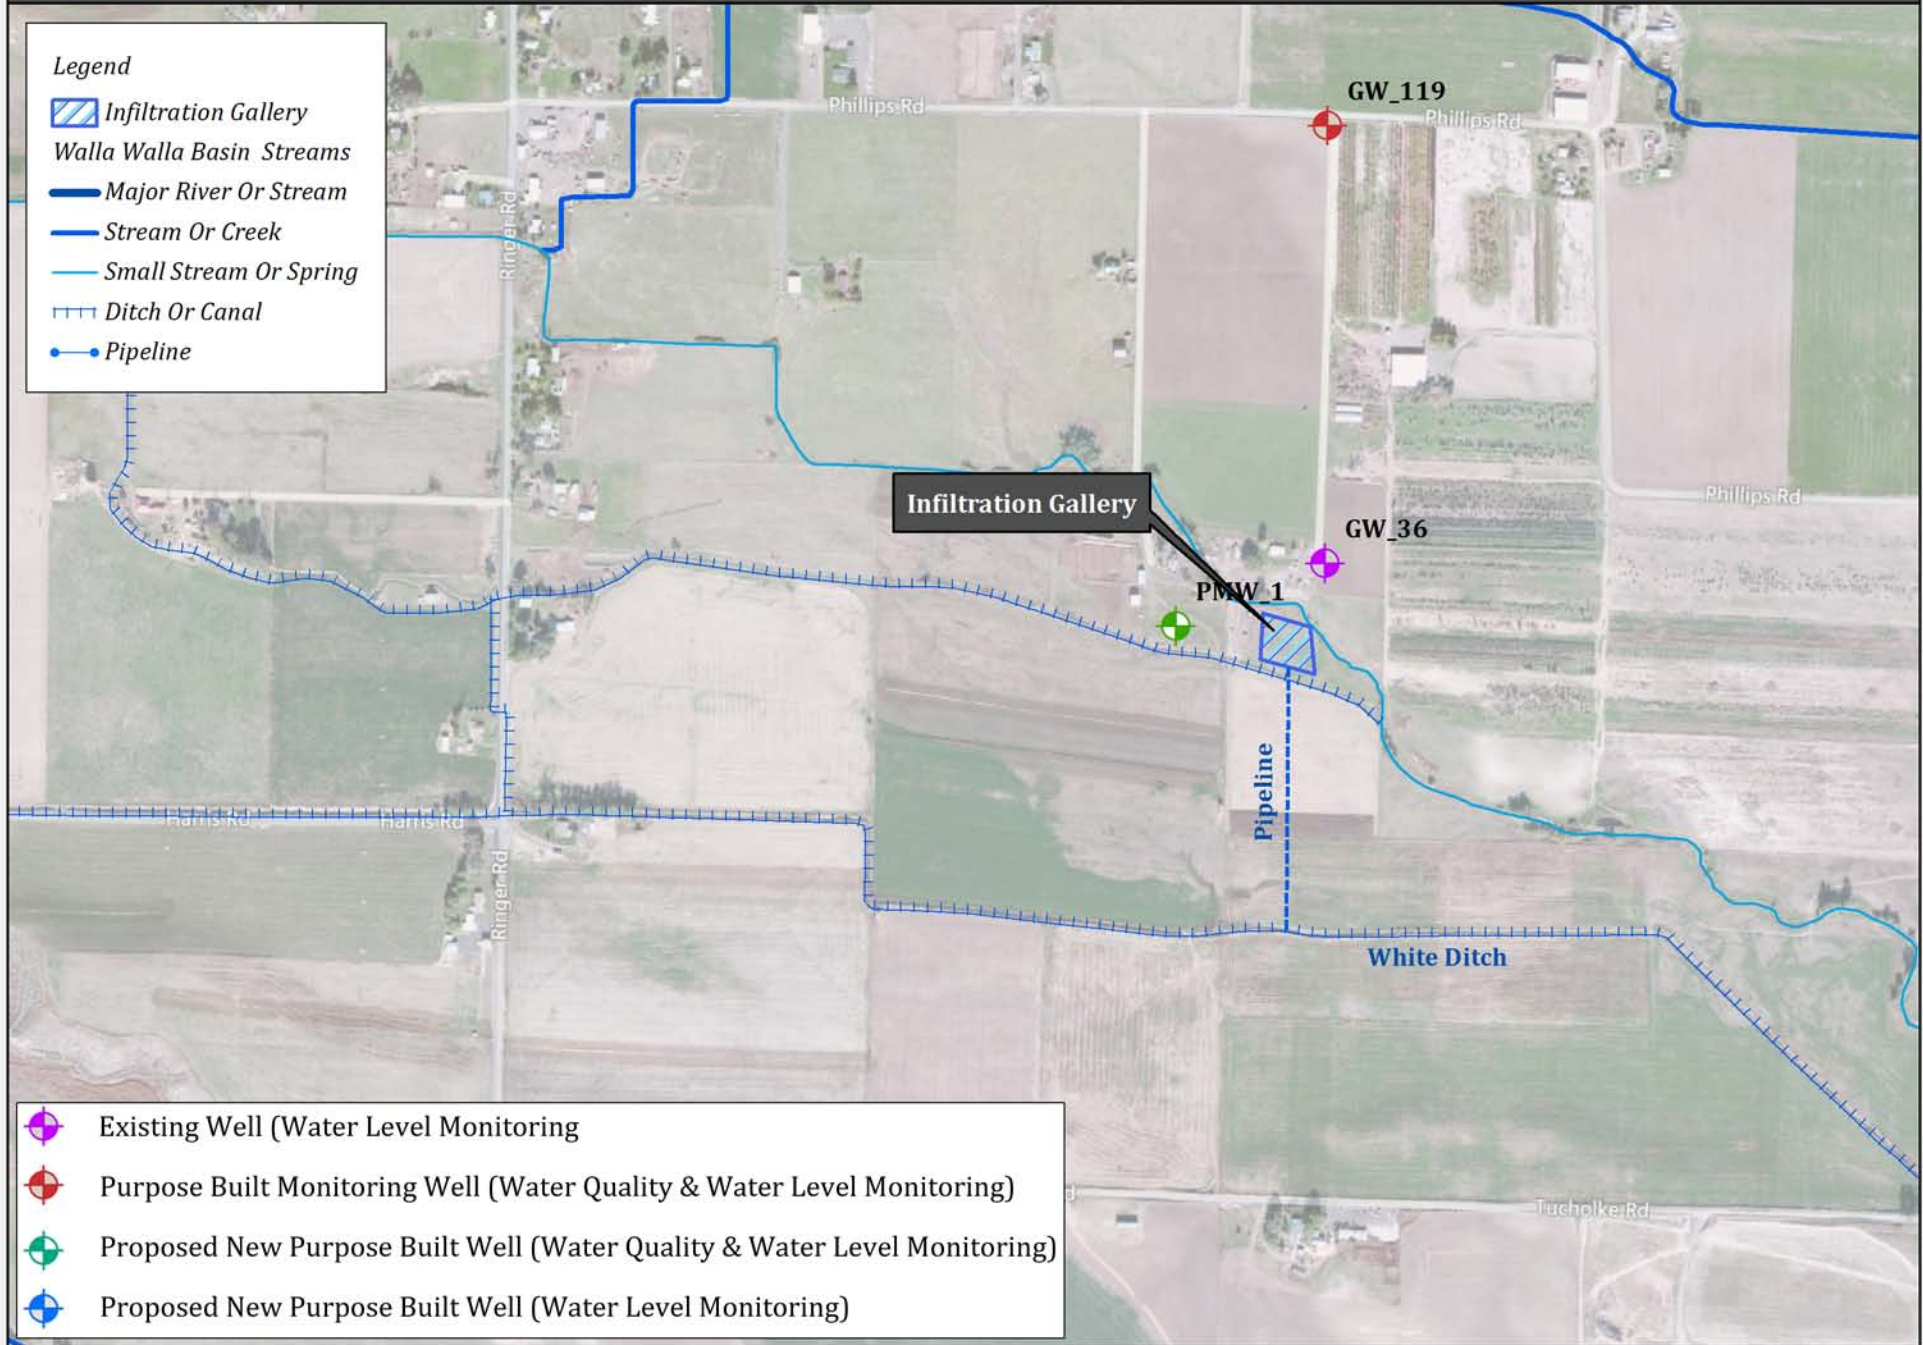


- Existing Well (Water Level Monitoring)
- Purpose Built Monitoring Well (Water Quality & Water Level Monitoring)
- Proposed New Purpose Built Well (Water Quality & Water Level Monitoring)
- Proposed New Purpose Built Well (Water Level Monitoring)

# Figure 9. ODOT Recharge Basin



**Legend**

- RechargeBasin
- Walla Walla Basin Streams**
- Major River Or Stream
- Stream Or Creek
- Small Stream Or Spring
- Ditch Or Canal
- Pipeline

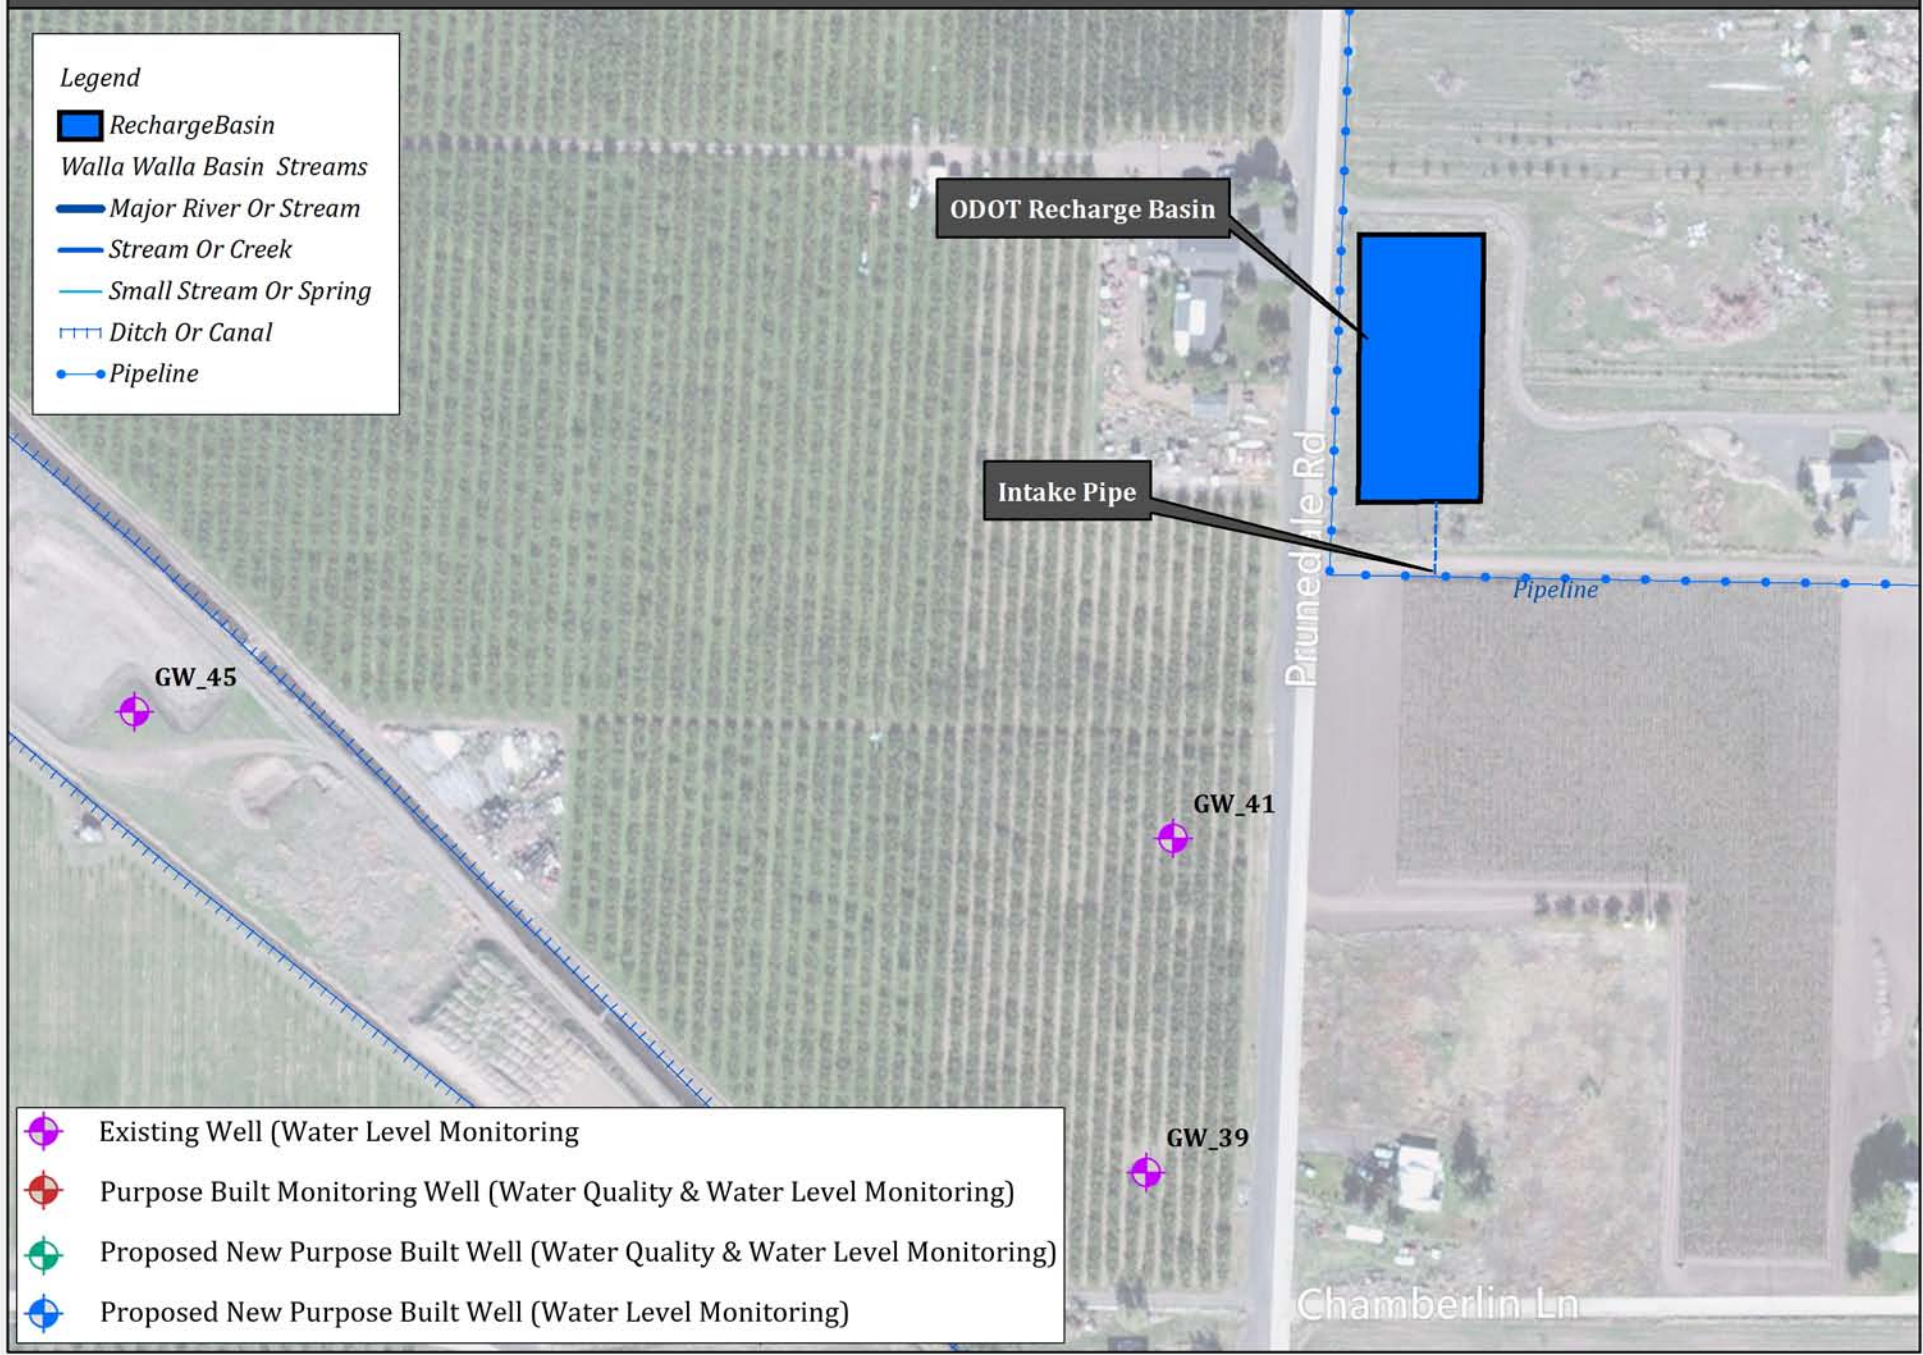

- Existing Well (Water Level Monitoring)
- Purpose Built Monitoring Well (Water Quality & Water Level Monitoring)
- Proposed New Purpose Built Well (Water Quality & Water Level Monitoring)
- Proposed New Purpose Built Well (Water Level Monitoring)

Suprabasalt Sediment Stratigraphic Chart, Walla Walla Basin



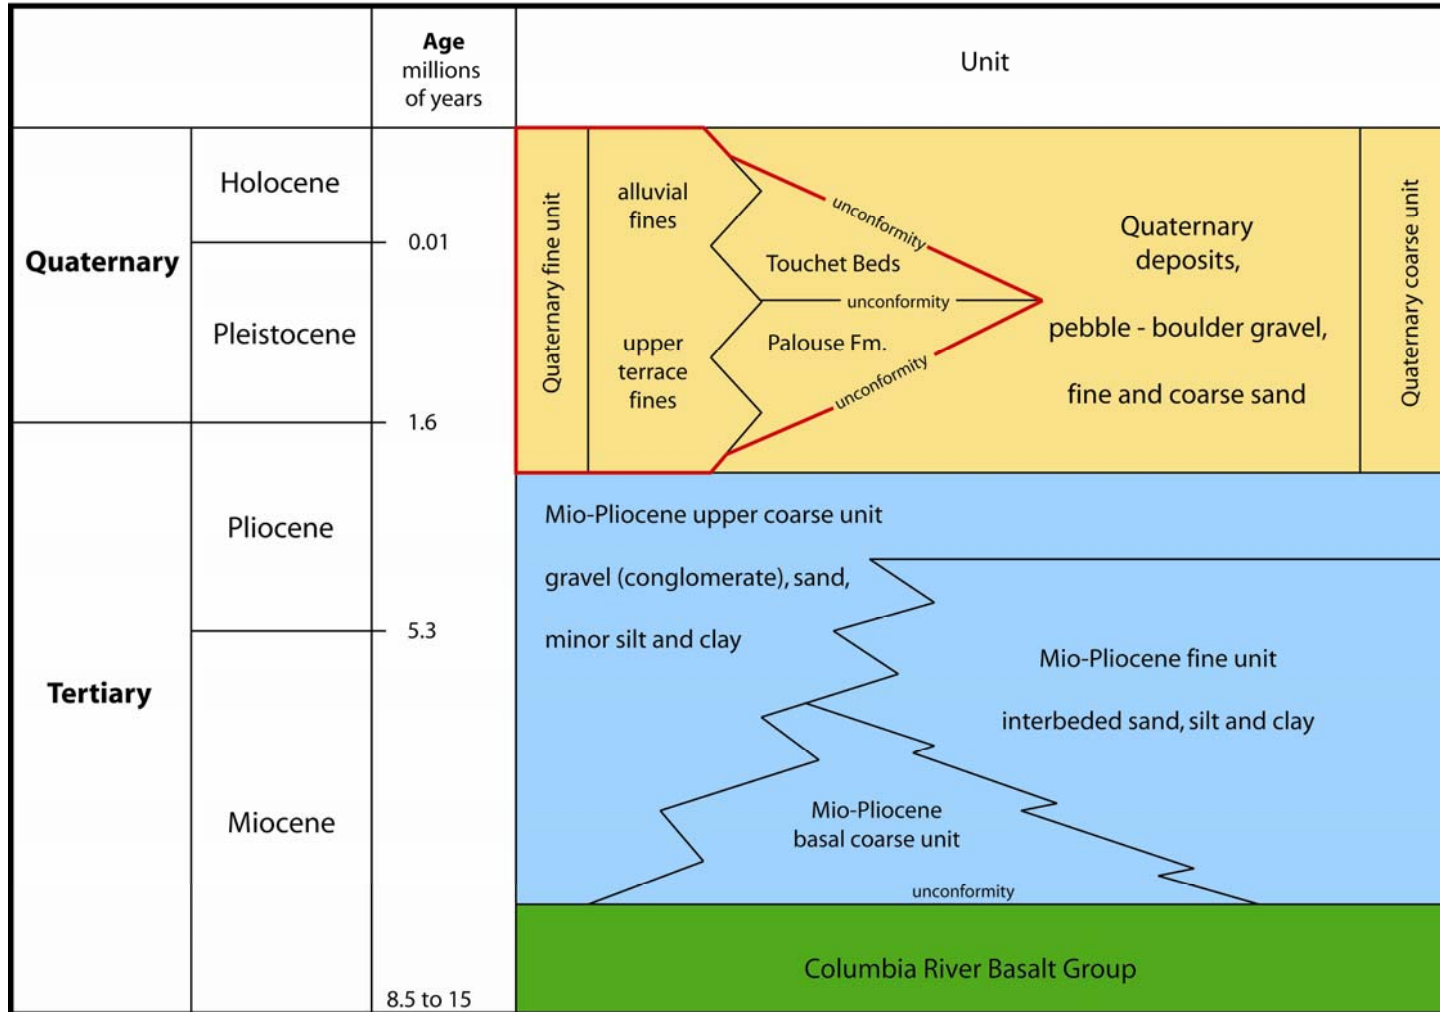


Figure 10. Suprabasalt sediment stratigraphy in the Walla Walla Basin as used in this report.

# Figure 11. Walla Walla Valley - Water Table October, 2009

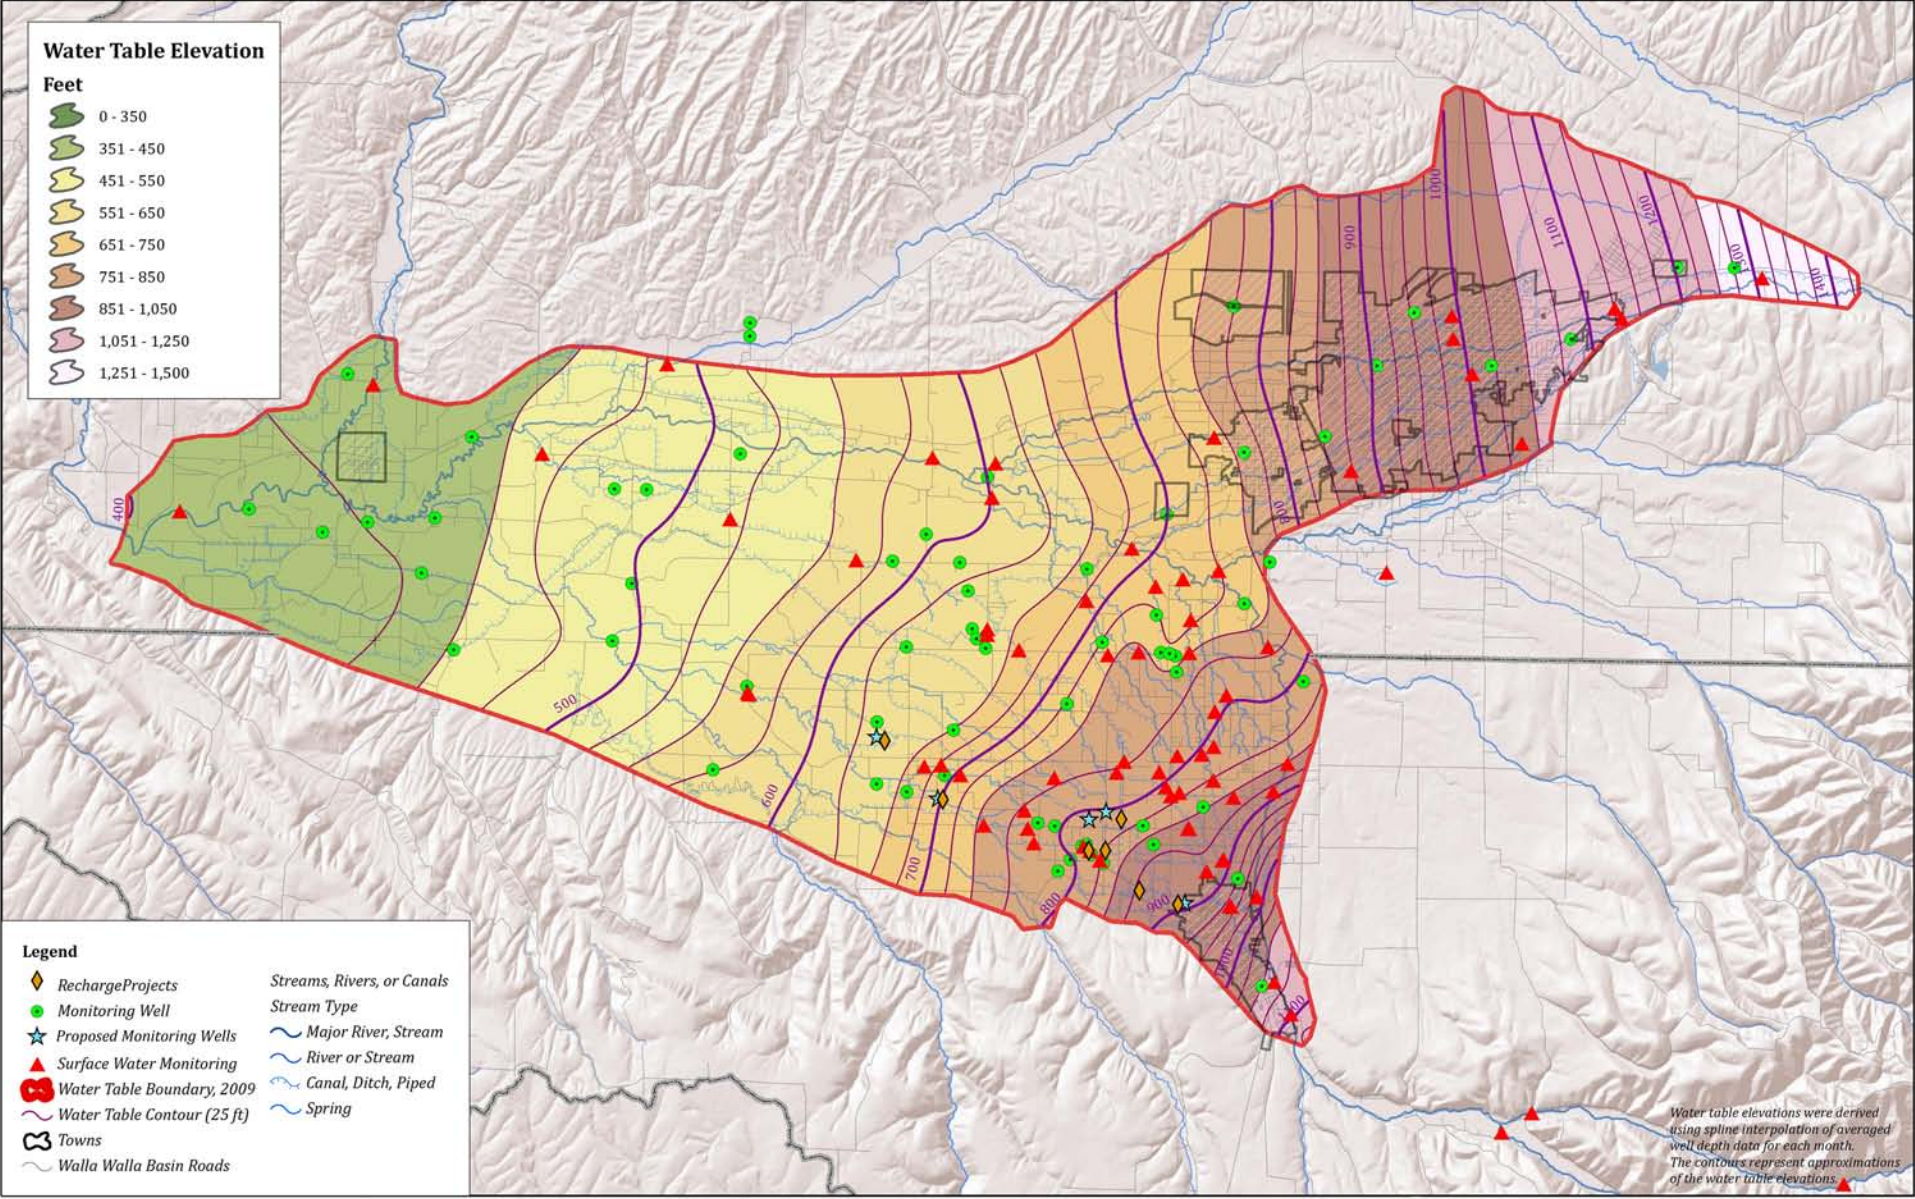


# Figure 12. Hulette Johnson Recharge Project

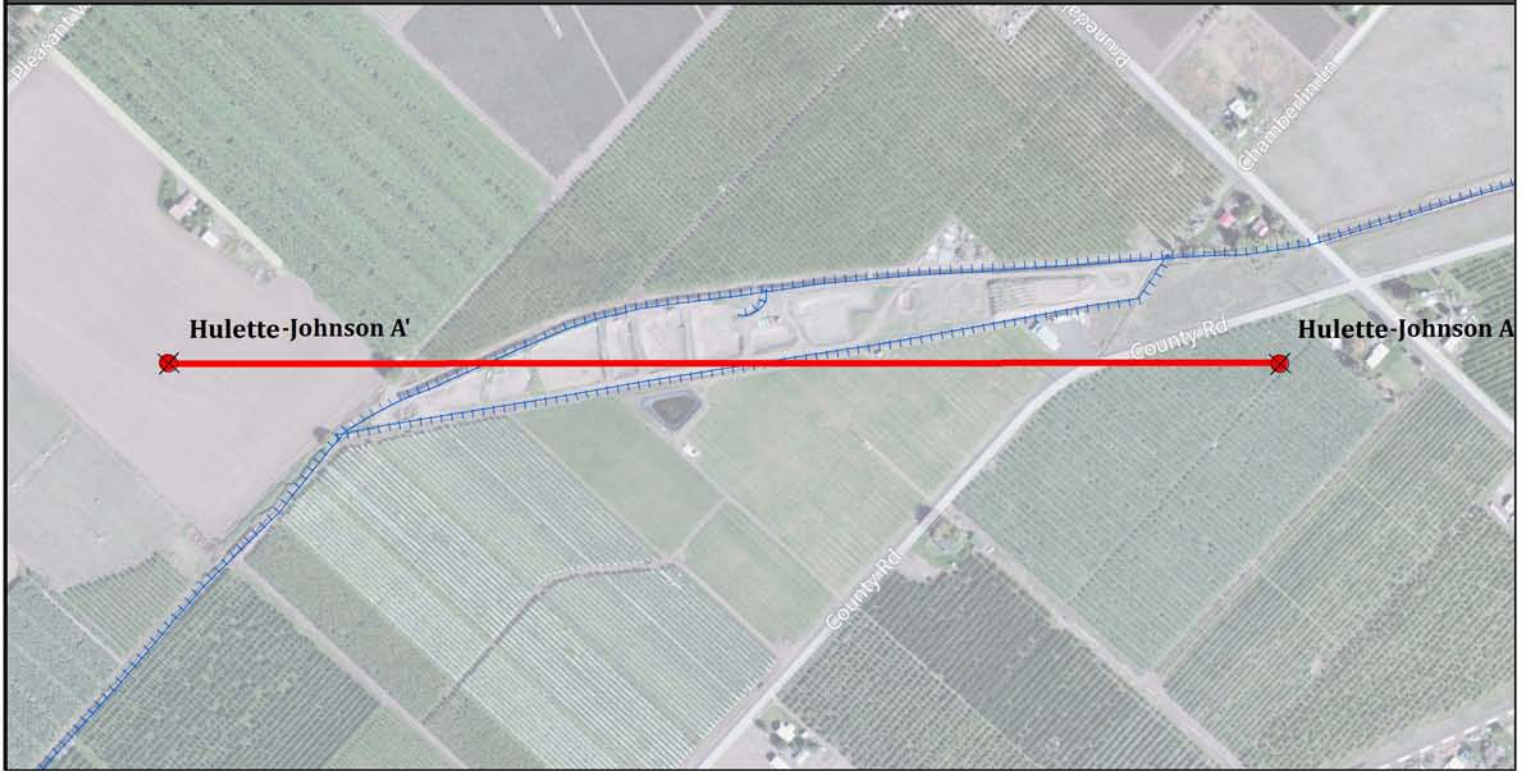

Hulette Johnson A'


## Geologic Cross Section

Hulette Johnson A

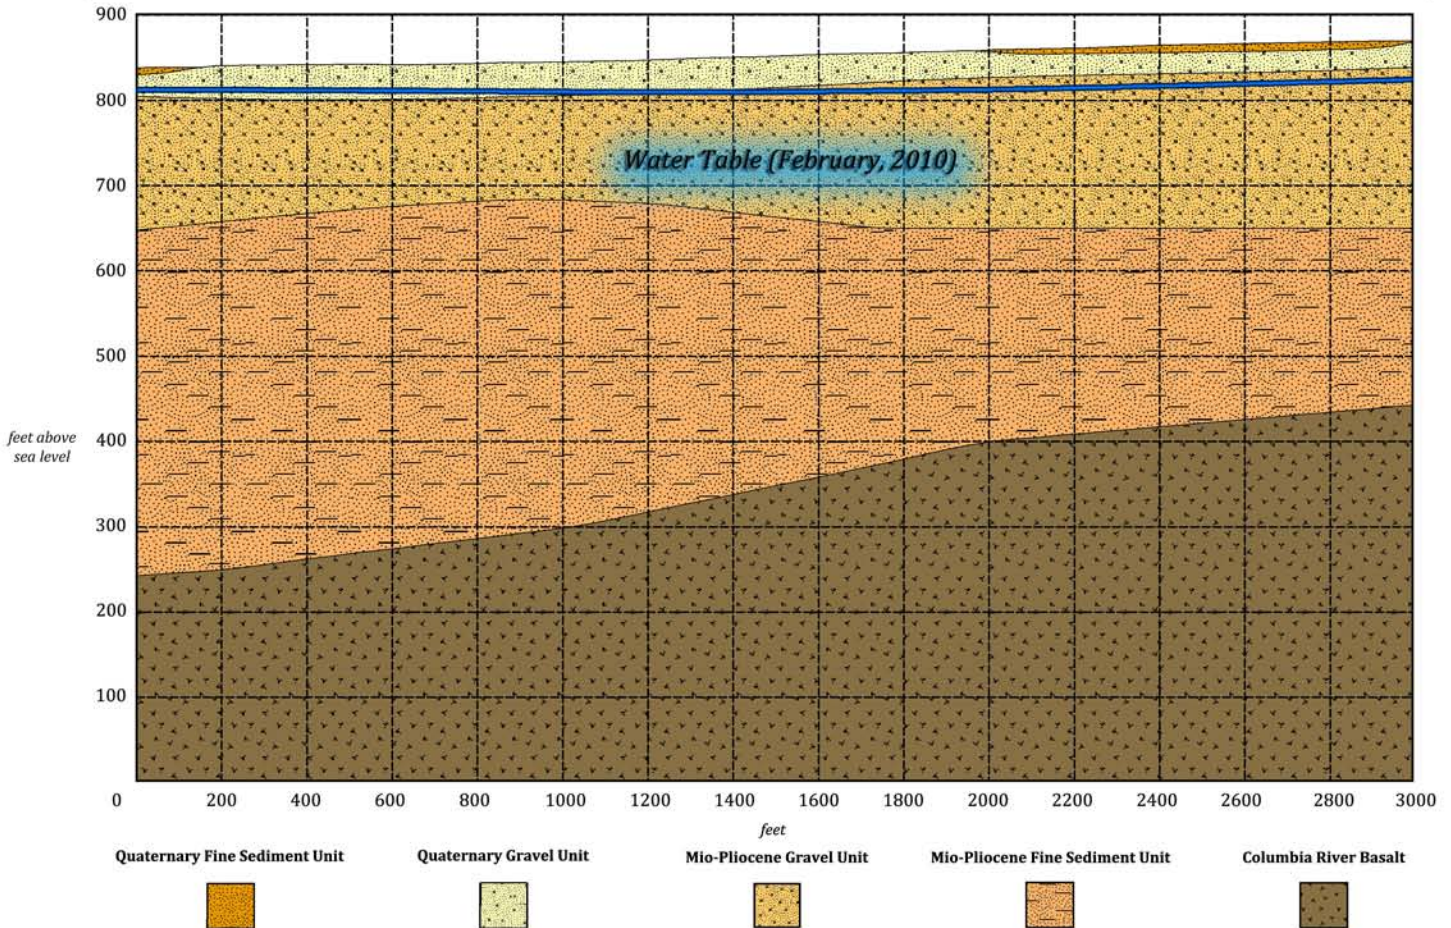




# Figure 13. Anspach Recharge Project



Anspach A'

## Geologic Cross Section

Anspach A

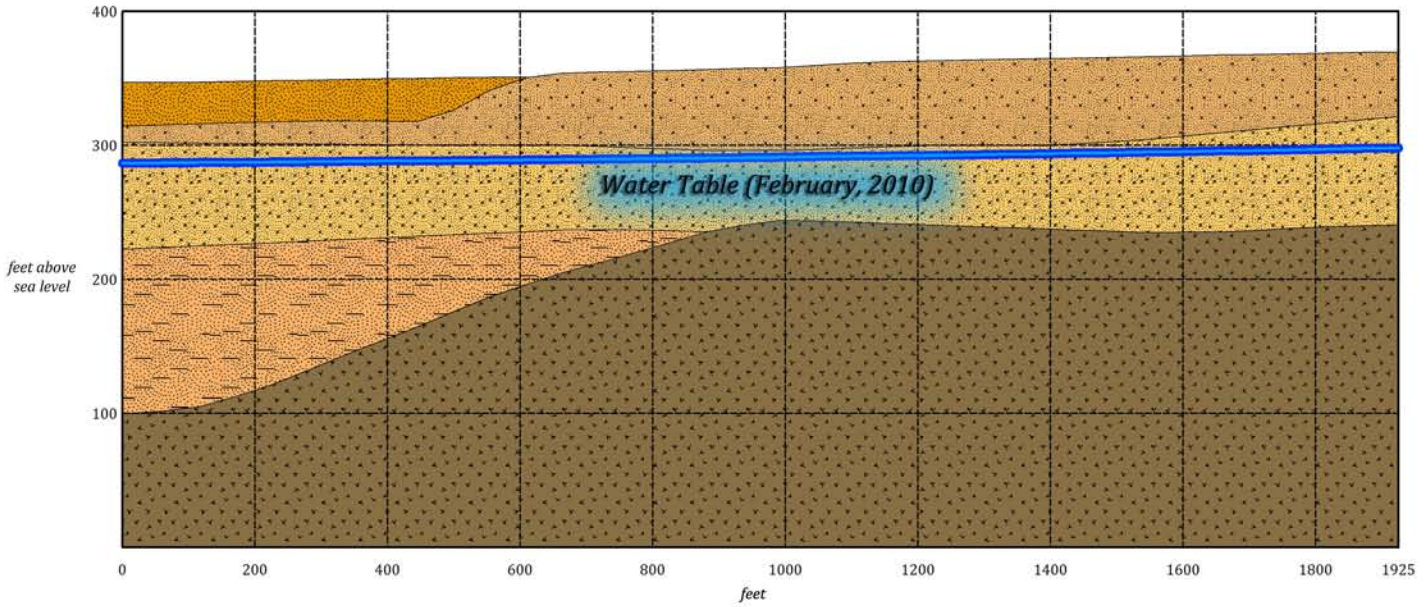

Quaternary Fine Sediment Unit



Quaternary Gravel Unit



Mio-Pliocene Gravel Unit



Mio-Pliocene Fine Sediment Unit



Columbia River Basalt




# Figure 14. Trumbull Recharge Project




Trumbull A'

## Geologic Cross Section

Trumbull A

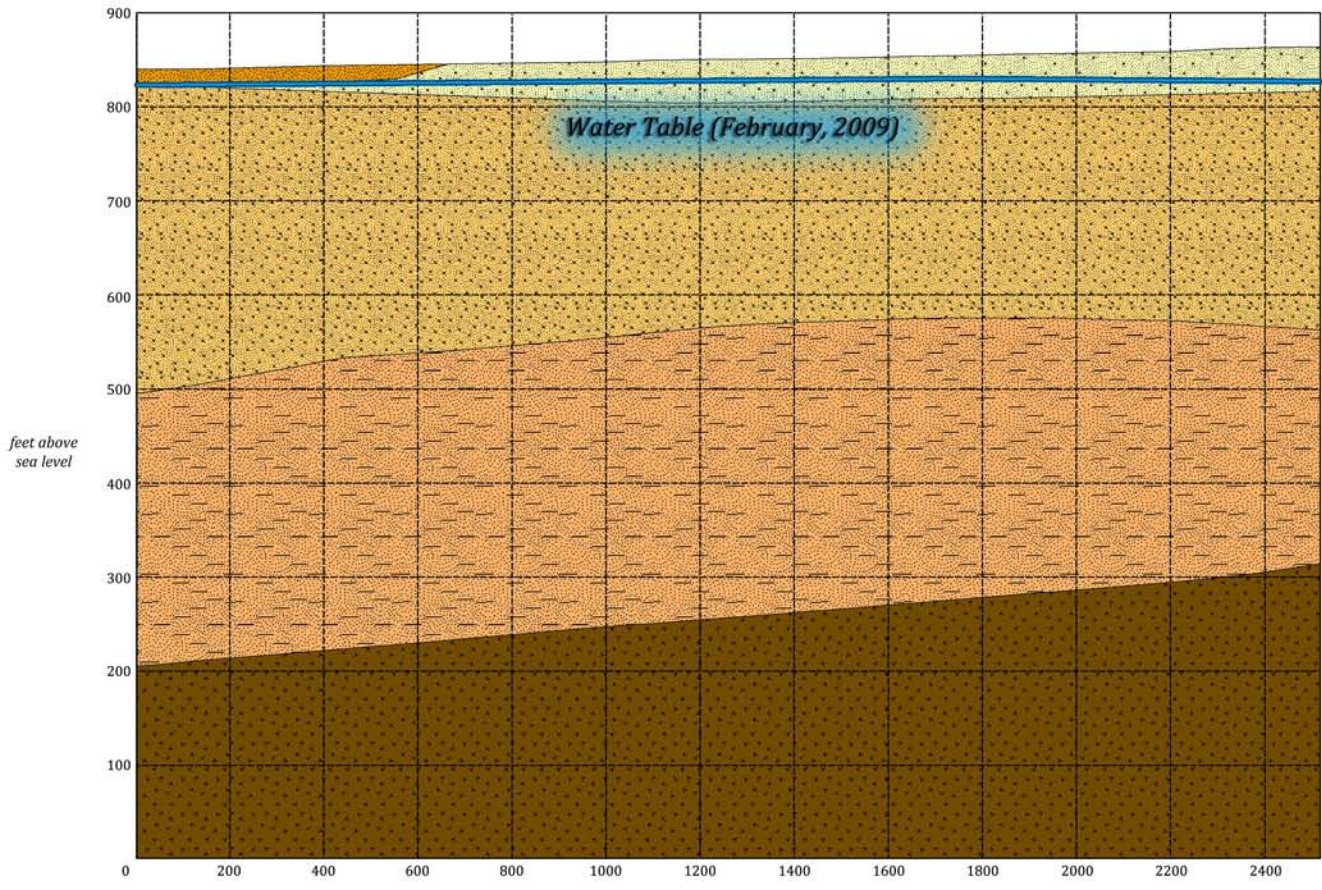


# Figure 15. Umapine Recharge Project

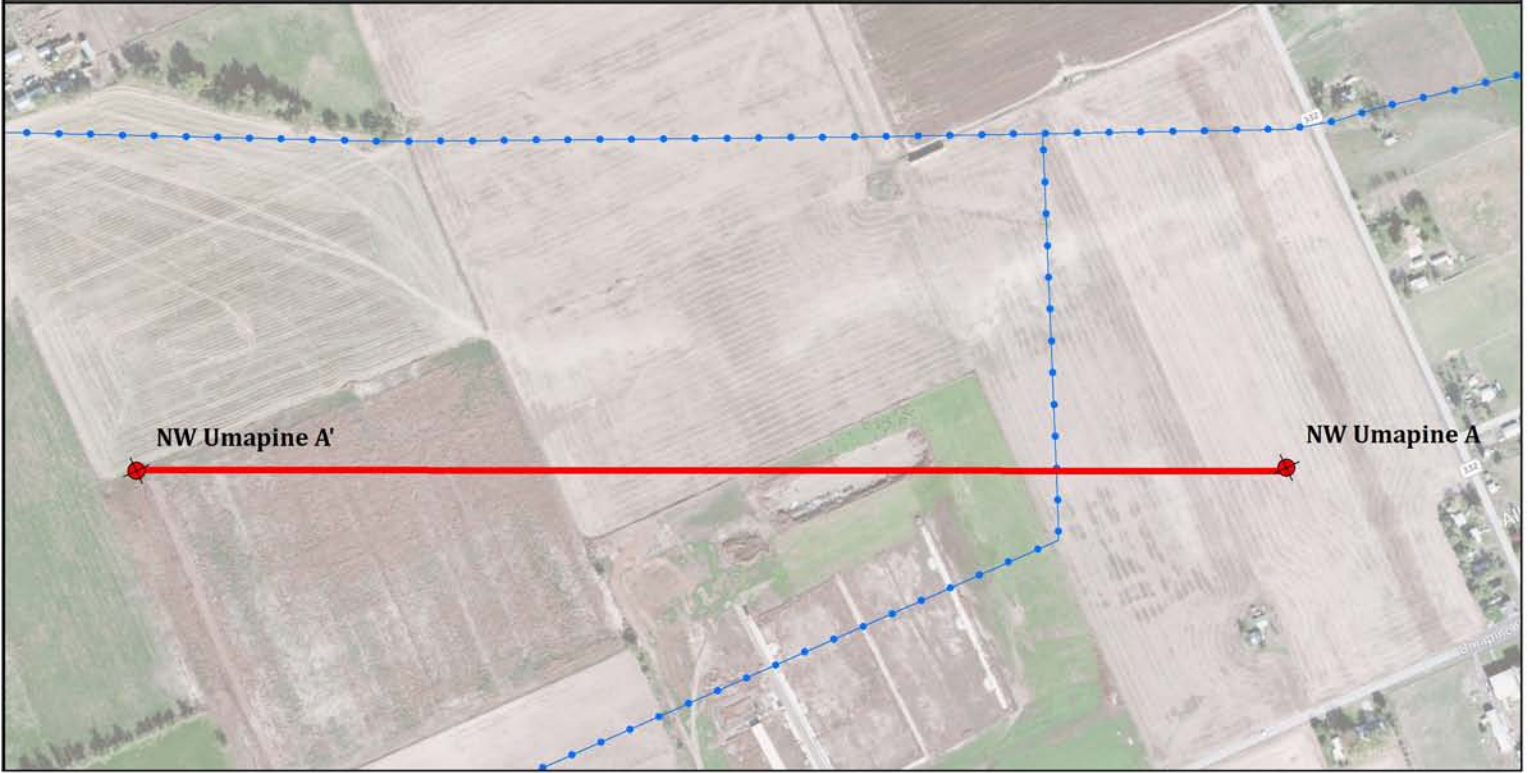

NW Umapine A'

## Geologic Cross Section

NW Umapine A

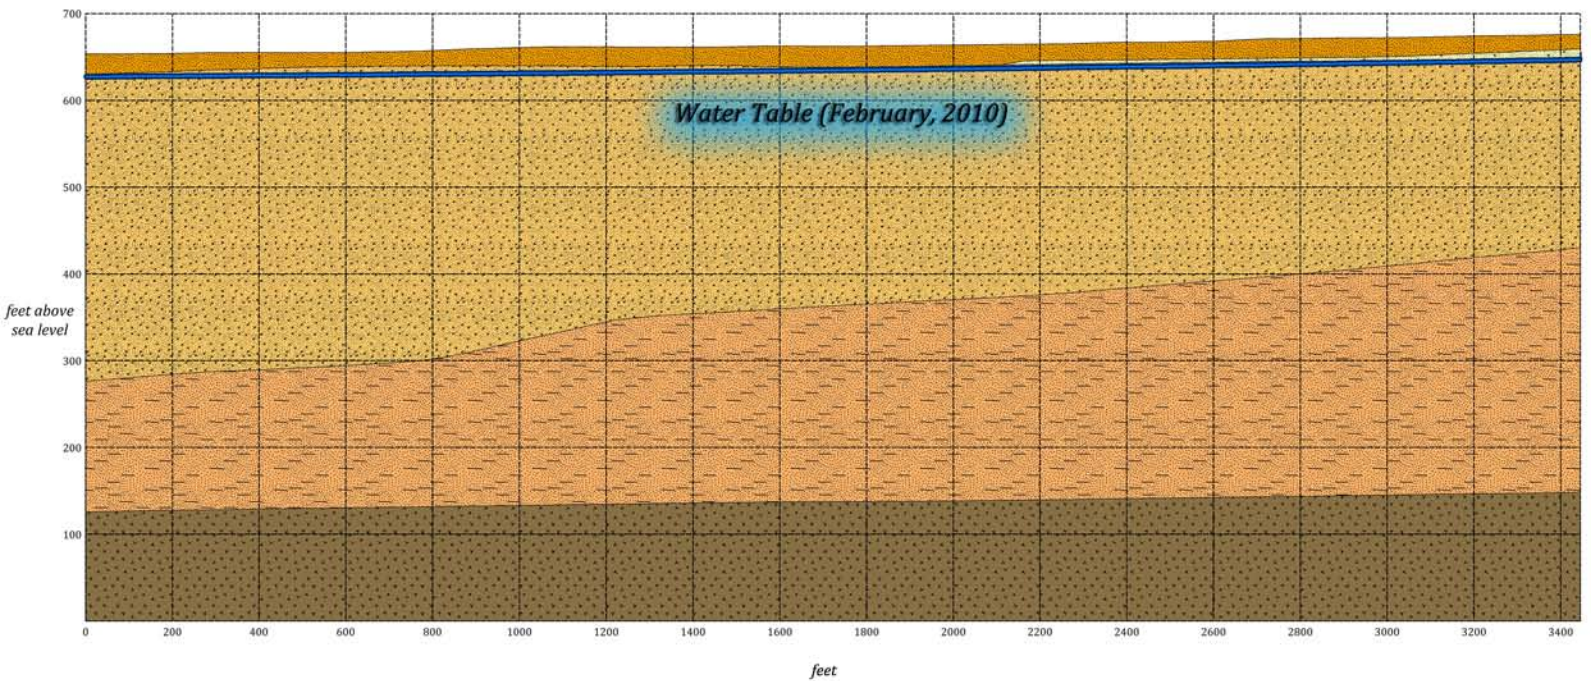

Quaternary Fine Sediment Unit



Quaternary Gravel Unit



Mio-Pliocene Gravel Unit




Mio-Pliocene Fine Sediment Unit



Columbia River Basalt




# Figure 16. Barrett Recharge Project



Barrett A'

## Geologic Cross Section

Barrett A

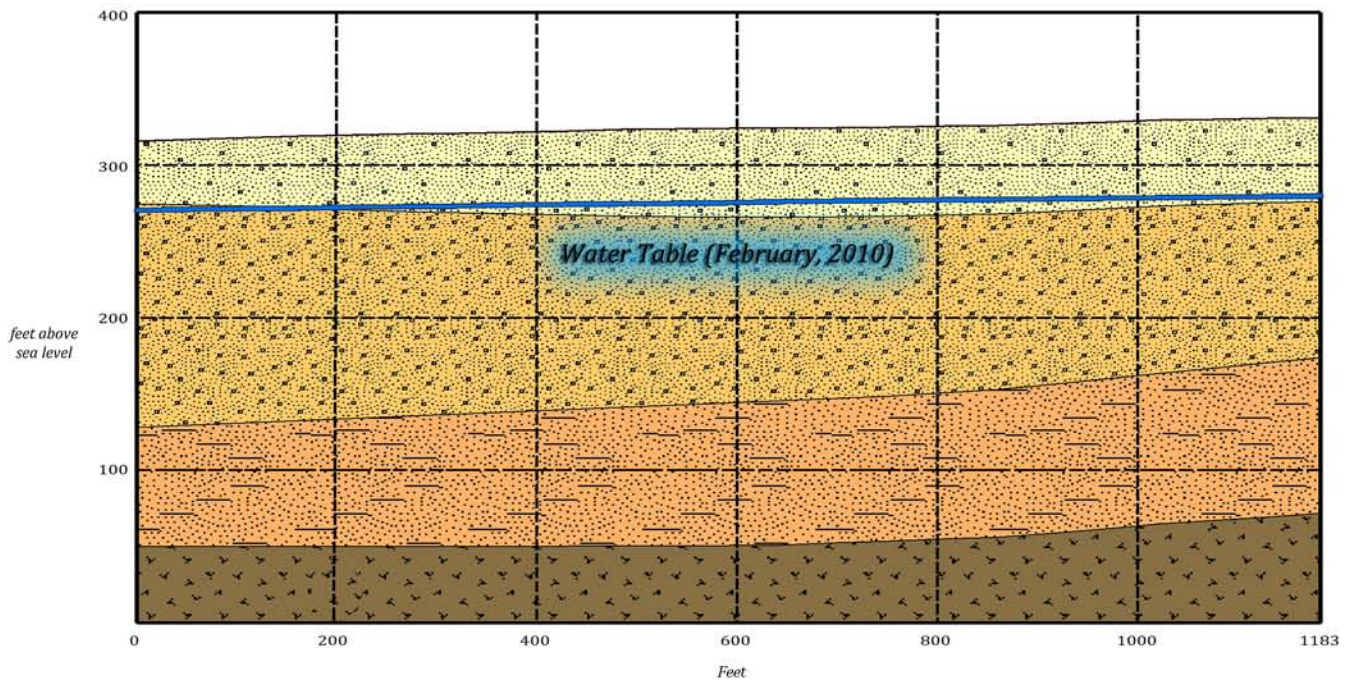

Quaternary Fine Sediment Unit



Quaternary Gravel Unit



Mio-Pliocene Gravel Unit





Mio-Pliocene Fine Sediment Unit



Columbia River Basalt




# Figure 17. Dugger Creek Recharge Project

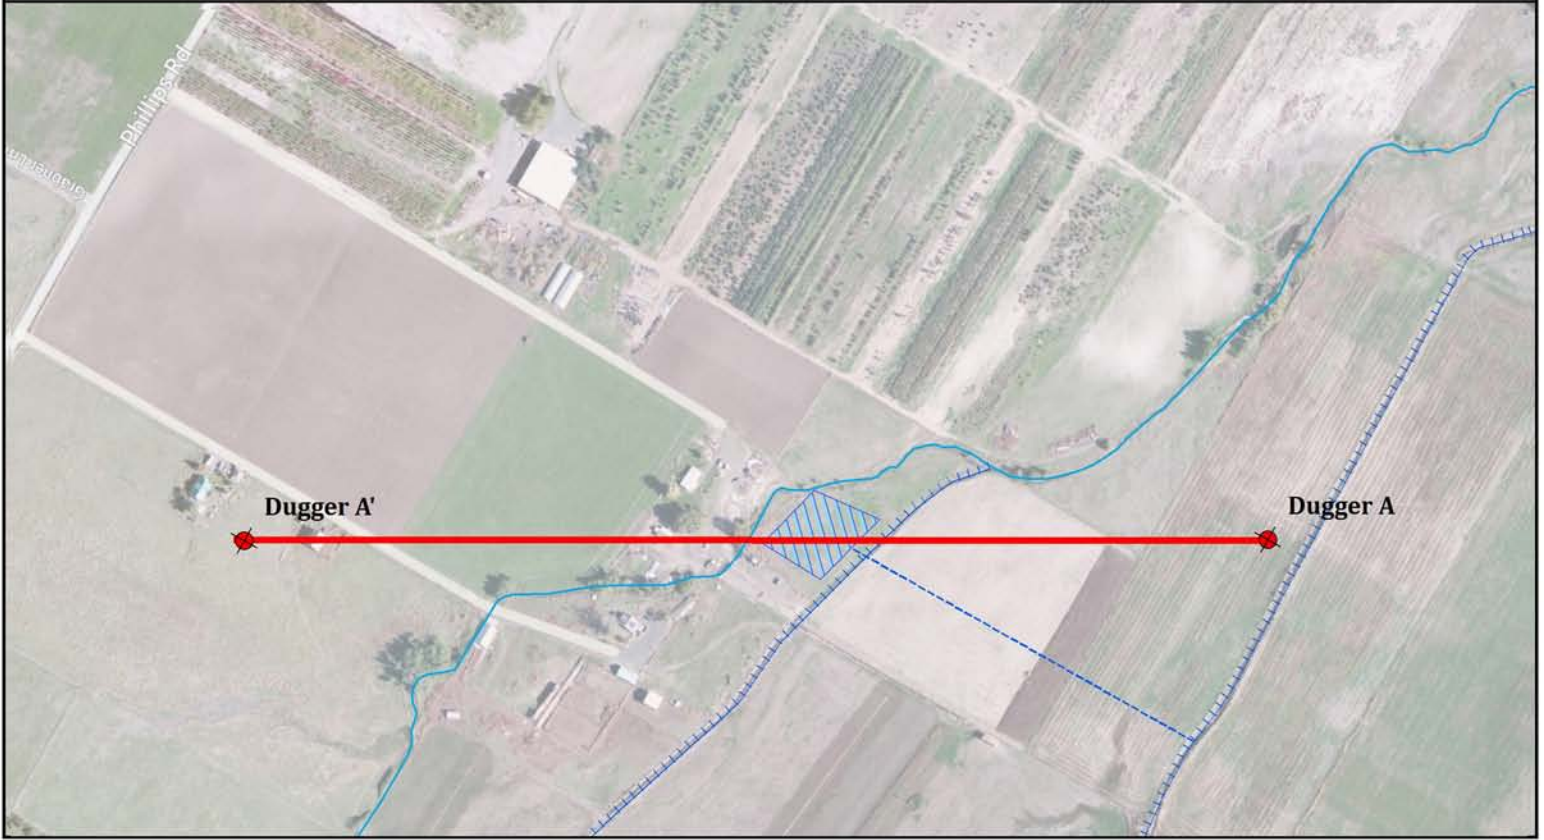

## Geologic Cross Section

Dugger A' Dugger A

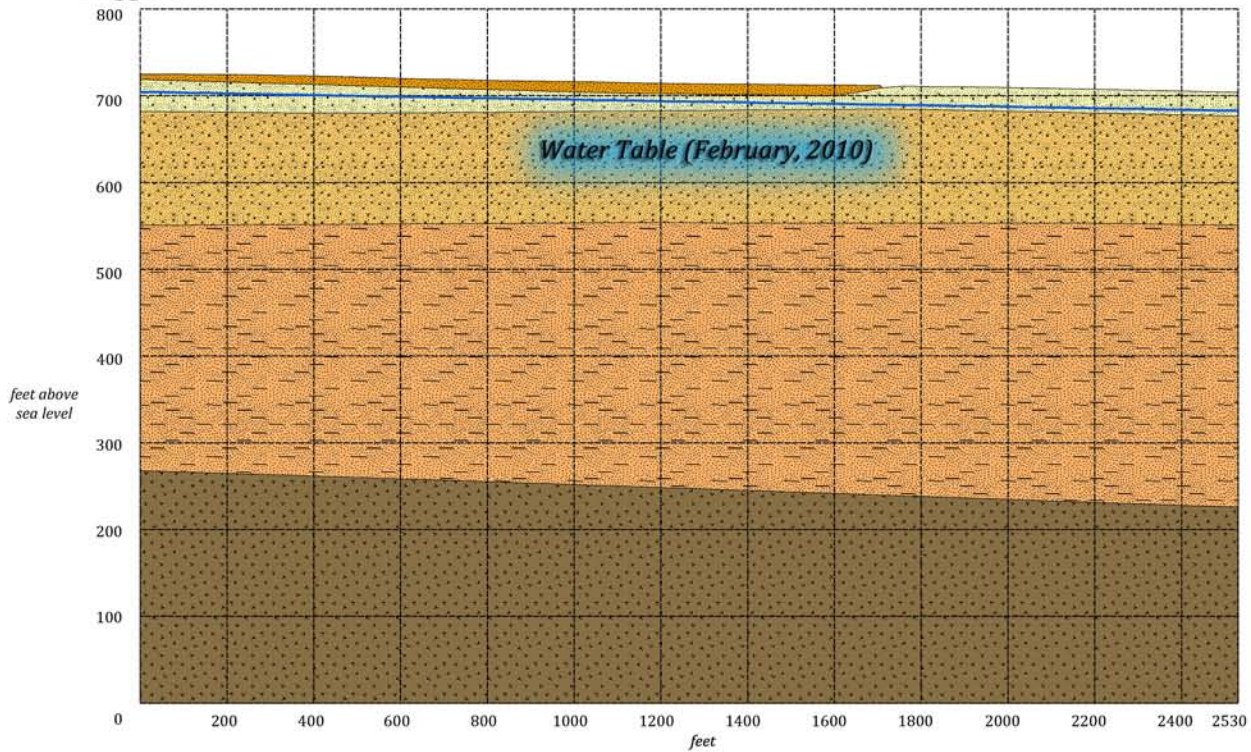

Quaternary Fine Sediment Unit



Quaternary Gravel Unit



Mio-Pliocene Gravel Unit



Mio-Pliocene Fine Sediment Unit




Columbia River Basalt



# Figure 18. ODOT Recharge Project



## Geologic Cross Section

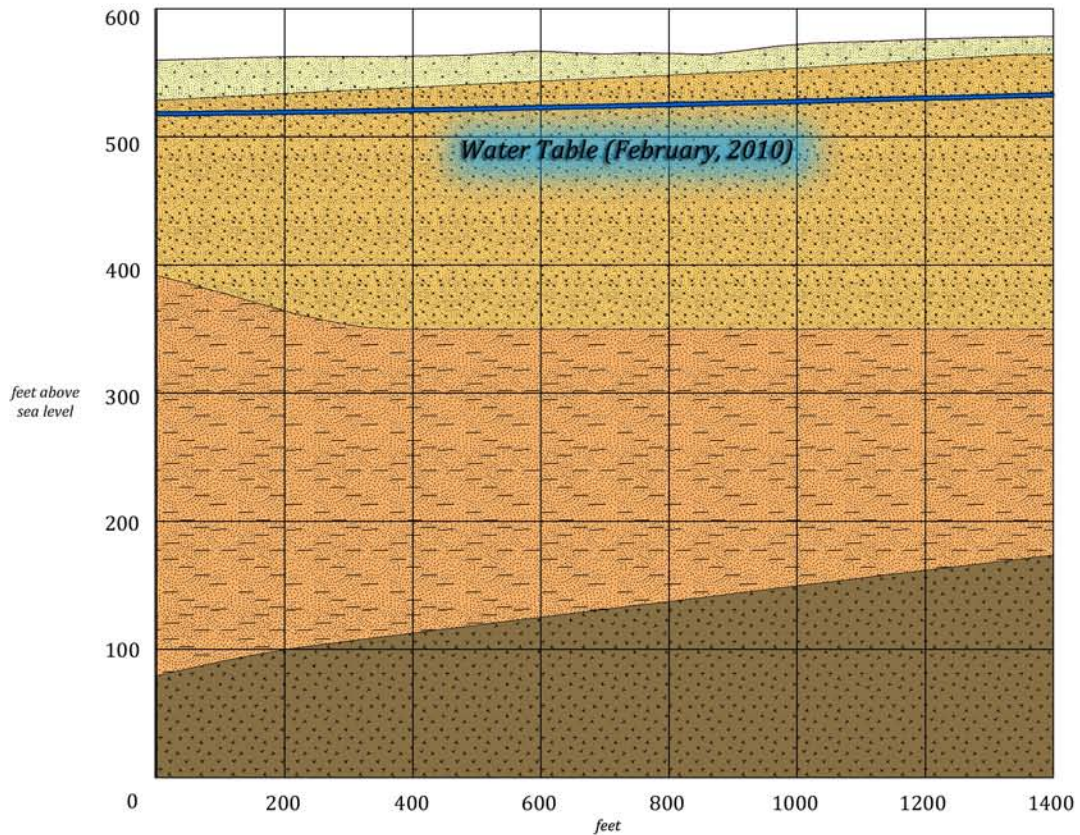

Quaternary Fine Sediment Unit



Quaternary Gravel Unit



Mio-Pliocene Gravel Unit




Mio-Pliocene Fine Sediment Unit




Columbia River Basalt



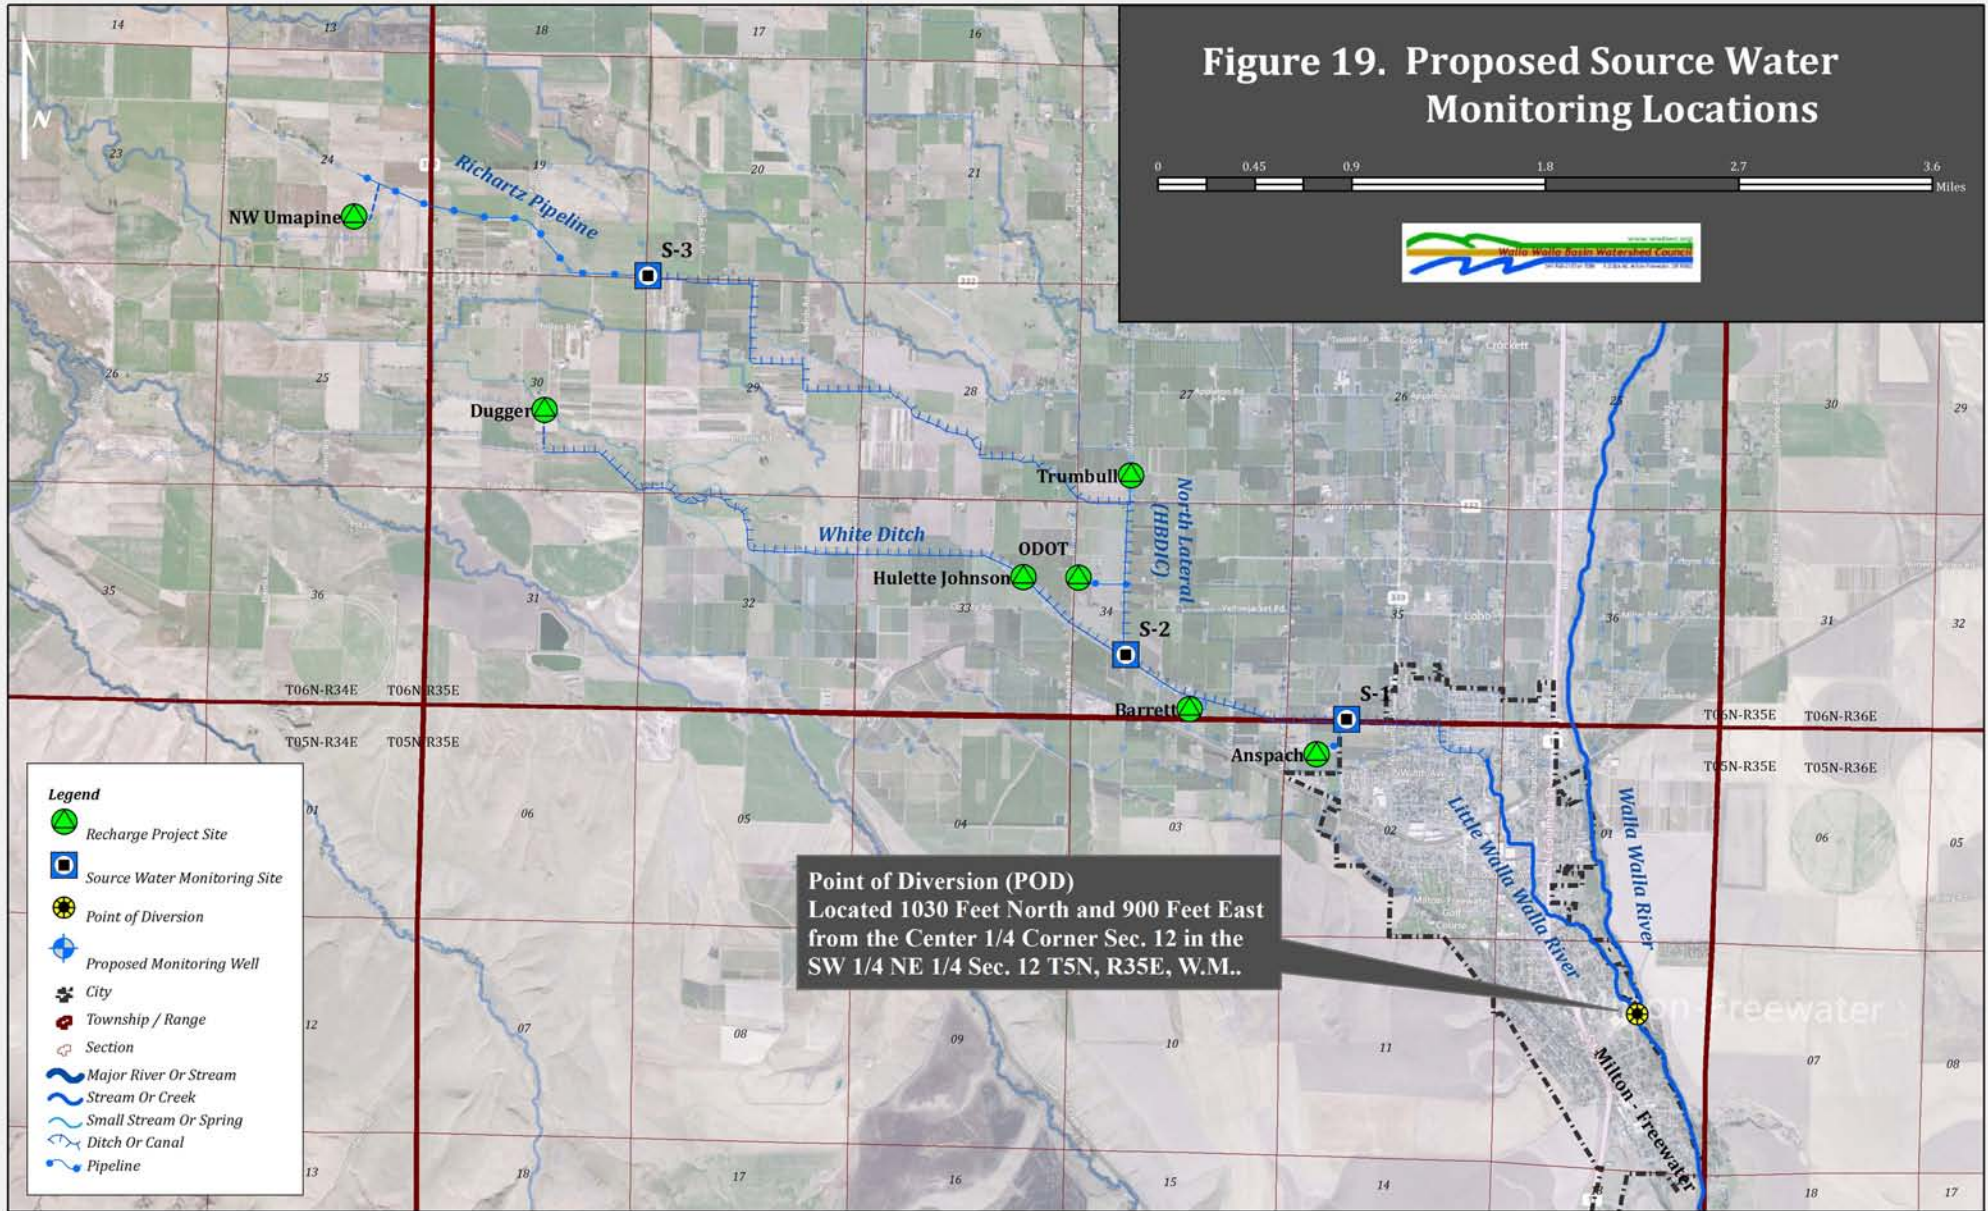

# Surface and Groundwater Monitoring in the Walla Walla Valley

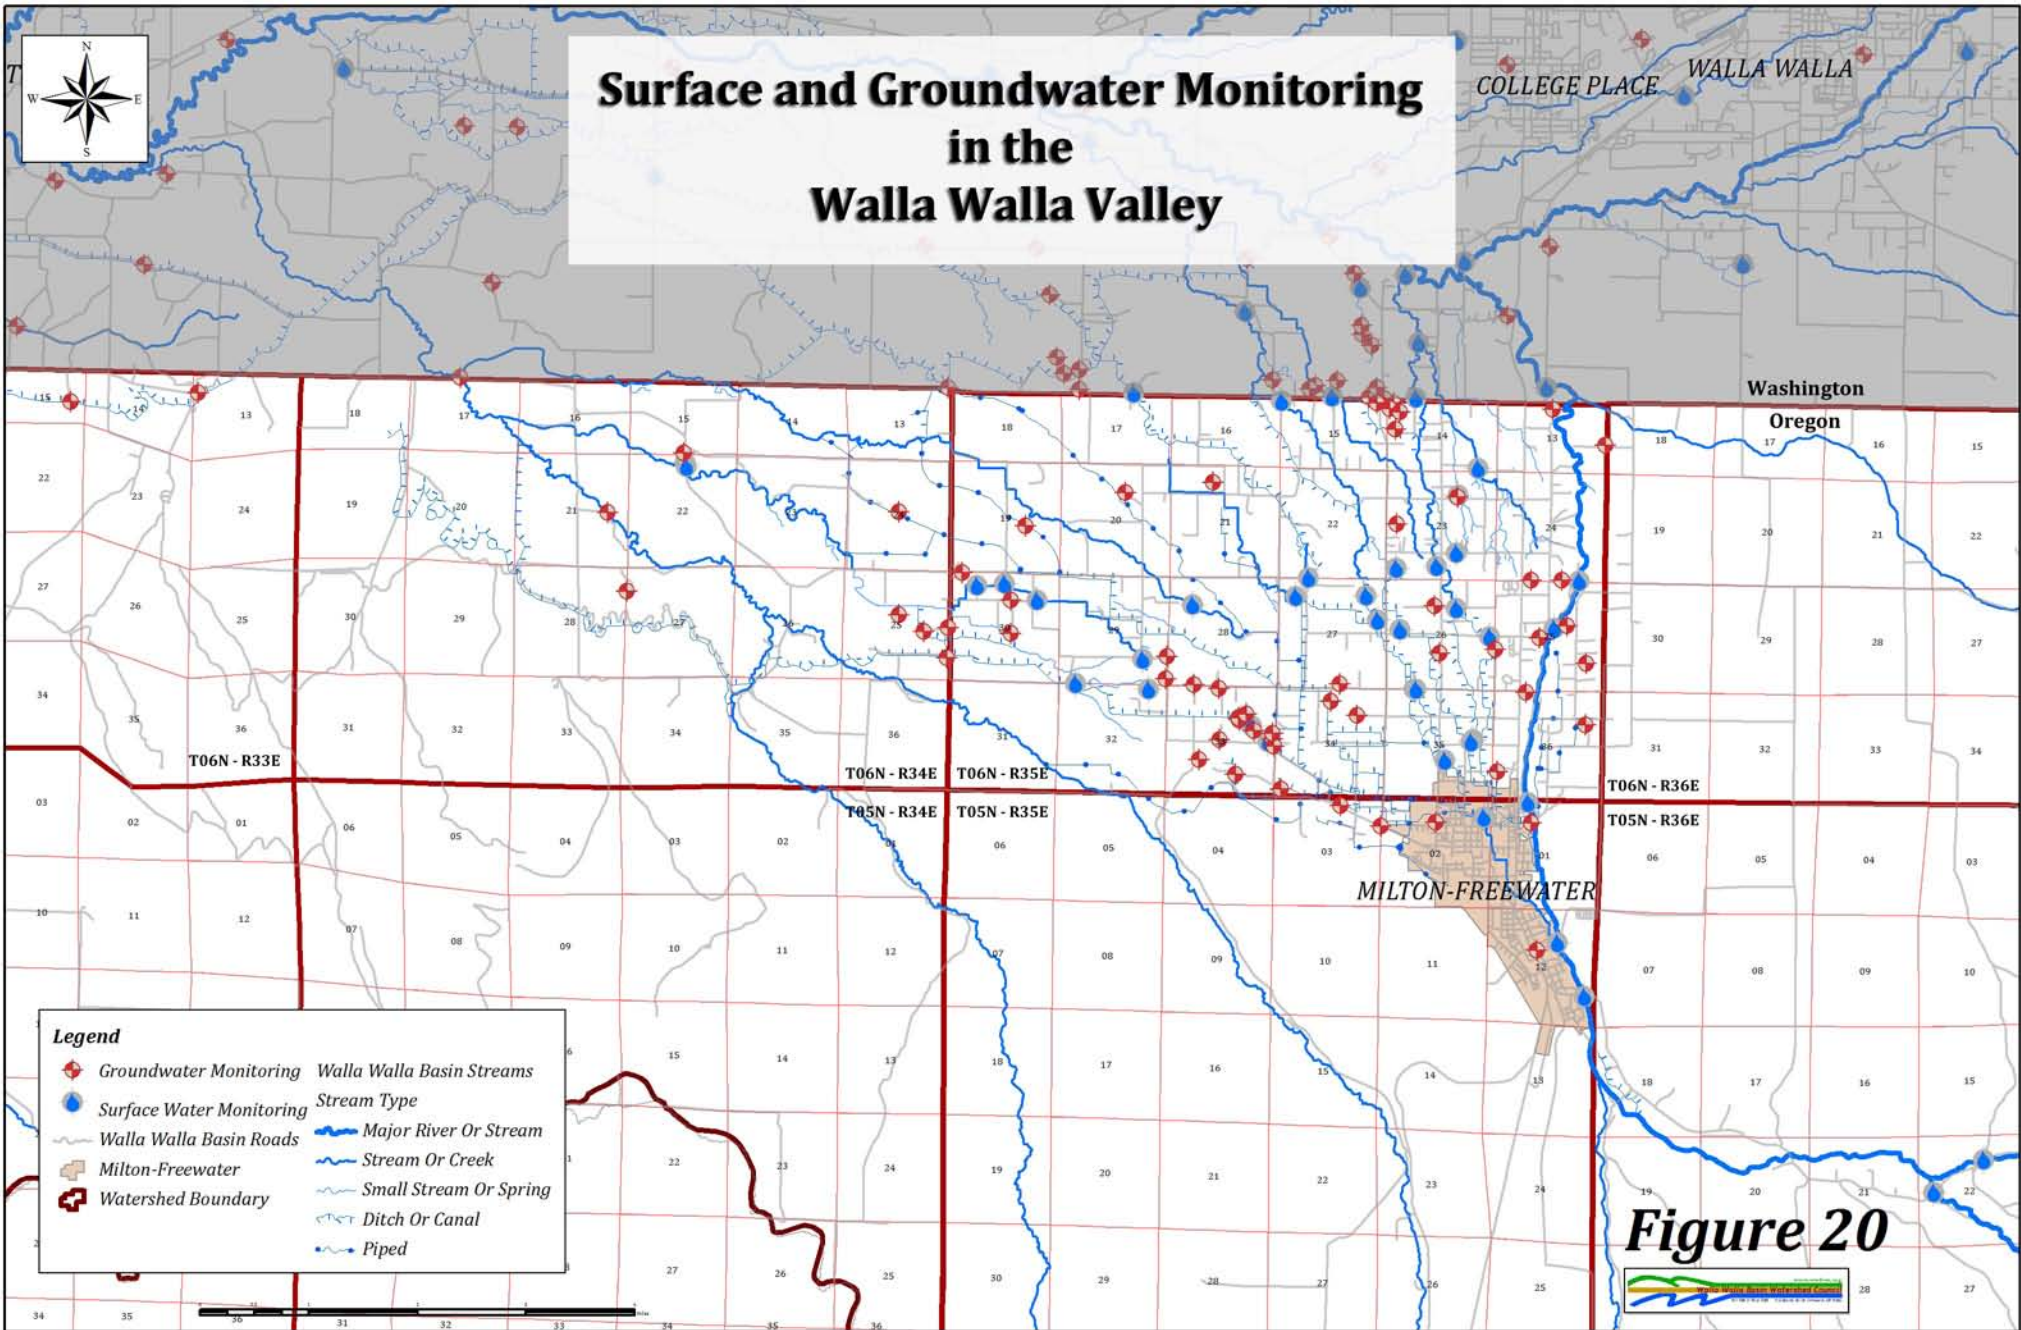

COLLEGE PLACE WALLA WALLA

Washington  
Oregon

MILTON-FREEWATER

T06N - R33E

T06N - R34E

T06N - R35E

T06N - R36E

T05N - R34E


T05N - R35E

T05N - R36E

## Legend

- Groundwater Monitoring
- Surface Water Monitoring
- Walla Walla Basin Roads
- Milton-Freewater
- Watershed Boundary
- Walla Walla Basin Streams
- Stream Type
- Major River Or Stream
- Stream Or Creek
- Small Stream Or Spring
- Ditch Or Canal
- Piped

**Figure 20**






**APPENDIX D – RECHARGE SITE DESIGNS**


---

SITE PLAN VIEW

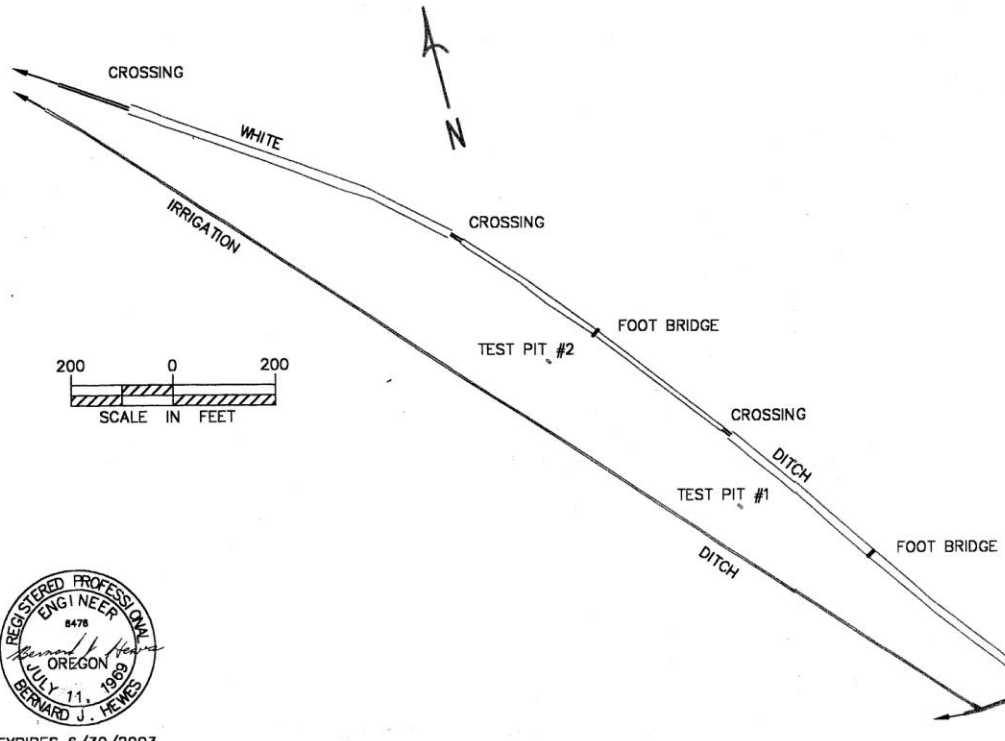

EXPIRES 6/30/2003

LOCATION MAP

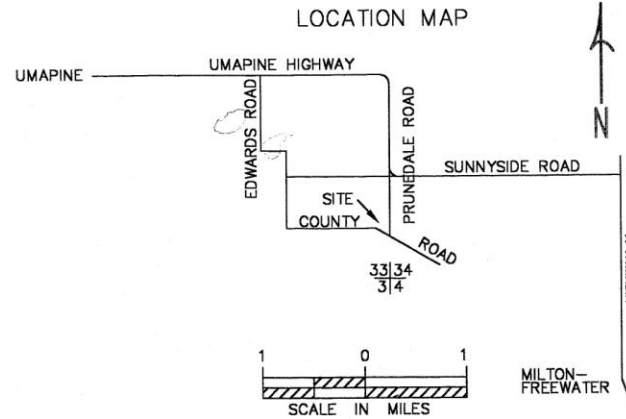

TOWNSHIP 6N  
RANGE 35E

TEST PIT #1

- 0-12" SANDY LOAM
- 12"-36" GRAVELLY SANDY LOAM, APPROX. 50% OF THE VOLUME IS GRAVEL SIZE PARTICLES WITH AN ESTIMATED  $D_{60}$  SIZE OF ABOUT 0.75".
- 36"-48" SANDY LOAM
- 48"-? GRAVELLY SANDY LOAM APPROX. 20% OF THE VOLUME IS GRAVEL SIZE PARTICLES.

TEST PIT #2


- 0-13" GRAVELLY SANDY LOAM
- 13"-39" COBBLY SANDY LOAM, THE  $D_{60}$  OF THE GRAVEL IS APPROXIMATELY 1"
- 39"-52" GRAVELLY SANDY LOAM
- 52"-? SAND GRAVEL MIX  $D_{60}$  ESTIMATED TO BE ABOUT 0.25".

TBM #1 LOCATION IS AT THE TOP OF THE WALL ON THE NORTH WEST CORNER OF A CONCRETE TURNOUT BOX ON THE LEFT SIDE OF WHITE DITCH NEAR THE UPSTREAM END OF A 44"x72" CMP. PAINTED RED SPOT, ELEVATION 100.00.

DATE \_\_\_\_\_  
DESIGNED B. HEVIES 4/08  
PLOTTED \_\_\_\_\_  
APPROVED \_\_\_\_\_

HUDSON BAY AQUIFER RECHARGE PROJECT  
SITE PLAN & LOCATION MAP

CADFILE  
whitereloc  
SHEET 1  
OF 4

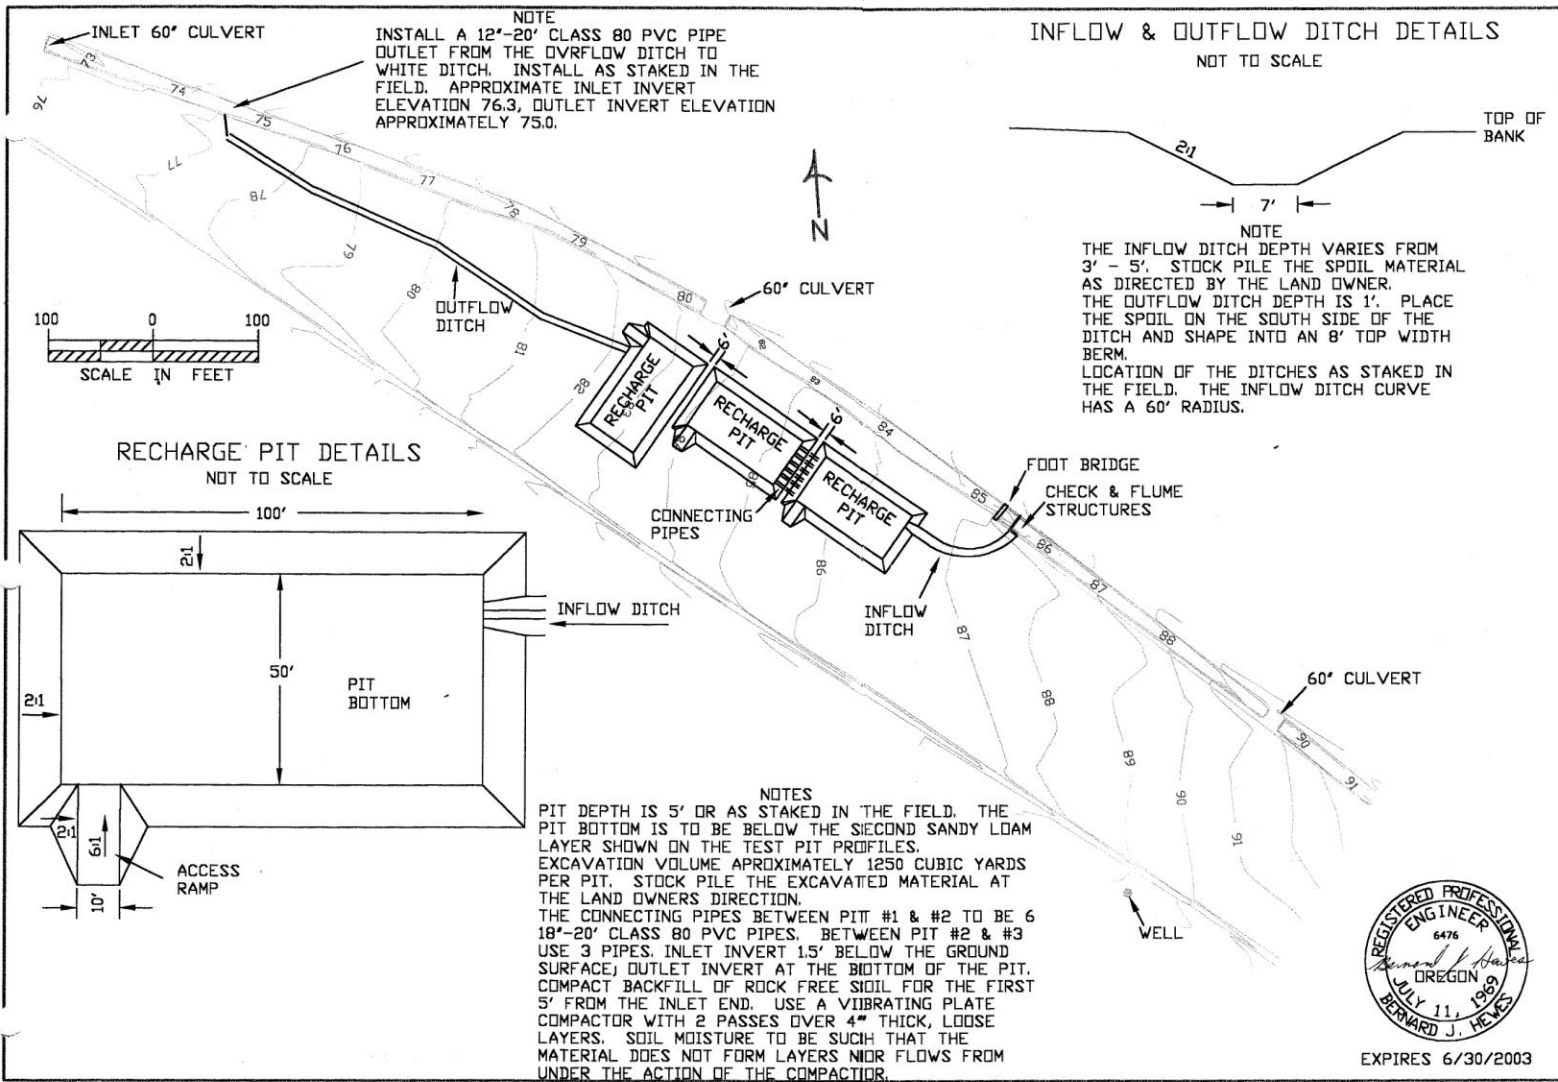

DATE \_\_\_\_\_  
DESIGNED B. HEWES \_\_\_\_\_  
PLOTTED \_\_\_\_\_  
APPROVED \_\_\_\_\_




**HUDSON BAY AQUIFER RECHARGE PROJECT SITE PLAN**




EXPIRES 6/30/2003

CADFILE  
whiteplan  
SHEET 2  
OF 4


STILLING WELL DETAIL

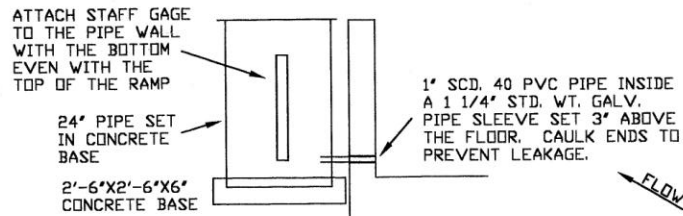


SECTION B

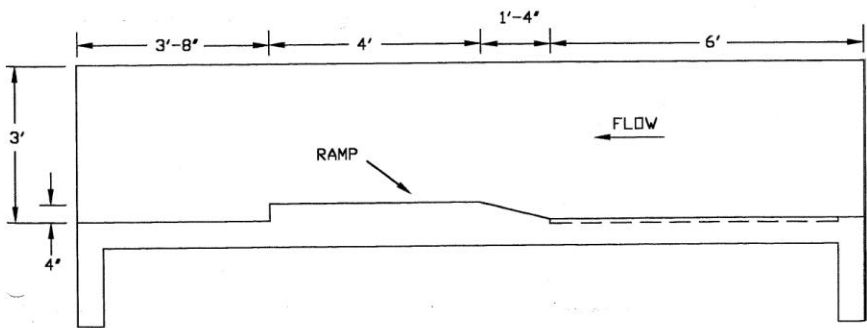

CHECK STRUCTURE & FLUME STRUCTURE PERSPECTIVE VIEW

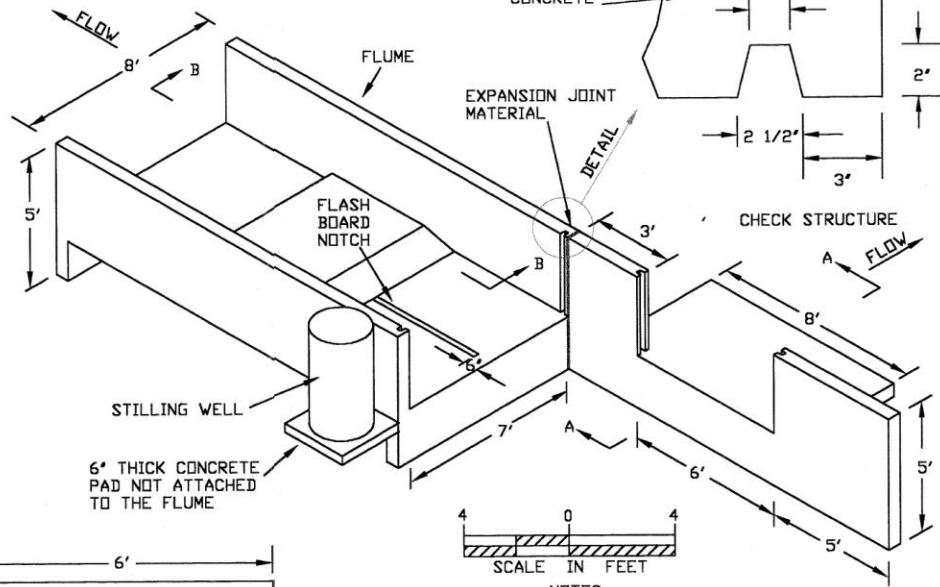

FLASH BOARD NOTCH DETAIL

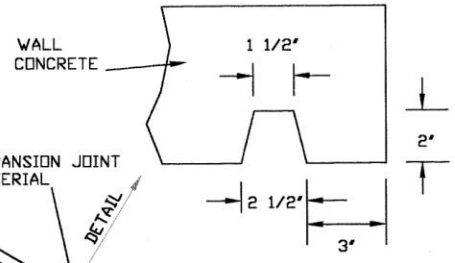

CHECK STRUCTURE

NOTES

INSTALL THE CONCRETE IN ACCORDANCE WITH CONSTRUCTION SPECIFICATION 42, ATTACHED.

ALL WALLS AND FLOORS TO BE 6" THICK.

USE 4000 PSI STRENGTH CONCRETE. 1.6 CUBIC YARDS NEEDED FOR THE CHECK STRUCTURE AND 4.9 CUBIC YARDS NEEDED FOR THE FLUME.

SEPARATE THE TWO STRUCTURES USING A 6'X 1/2"X 5' STRIP OF ASPHALT EXPANSION JOINT FILLER.

THE STILLING WELL PIPE MAY BE CORRUGATED METAL OR CLASS 80, MINIMUM, PVC PIPE.

THE FLASH BOARD NOTCH IN THE BOTTOM OF THE FLUME IS TO HOLD THE BOTTOM OF A SPLITTER WALL. USE 2 PIECES OF 3/4" MARINE PLYWOOD. HOLD THE TOP AT THE DOWNSTREAM END WITH A 2'X8'X8' WITH 2-2'X4'X8' CLEATS. AT THE UPSTREAM END USE 2-2'X12'X8' WITH 2-2'X4'X24' CLEATS.

DATE \_\_\_\_\_

DESIGNED BY: HEWES

PLOTTED \_\_\_\_\_


APPROVED \_\_\_\_\_

HUDSON BAY AQUIFER RECHARGE PROJECT STRUCTURE DETAILS


CADFILE whl/teck

SHEET 3 OF 4

CHECK STRUCTURE ELEVATION VIEW

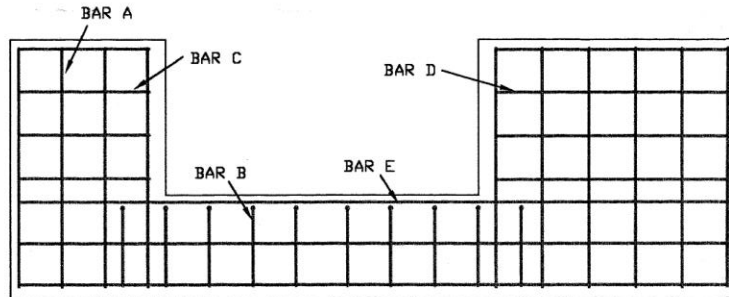

APRON PLAN VIEW

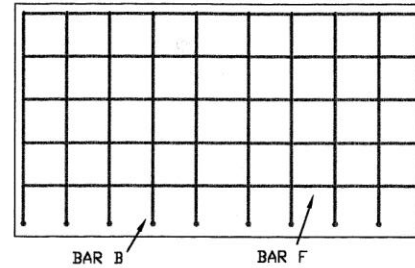

REINFORCING STEEL SCHEDULE


| BAR NO. | SHAPE       | A      | B     | C     |
|---------|-------------|--------|-------|-------|
| CHECK   |             |        |       |       |
| A       | 10 STRAIGHT | 4'-7"  | -     | -     |
| B       | 10 ALB      | 1'-7"  | 4'-1" | -     |
| C       | 4 STRAIGHT  | 2'-6"  | -     | -     |
| D       | 4 STRAIGHT  | 4'-6"  | -     | -     |
| E       | 3 STRAIGHT  | 13'-8" | -     | -     |
| F       | 5 STRAIGHT  | 7'-8"  | -     | -     |
| FLUME   |             |        |       |       |
| G       | 19 ALB/C    | 3'-1"  | 7'-6" | 3'-1" |
| H       | 20 ALB      | 1'-6"  | 8'-1" | -     |
| I       | 4 STRAIGHT  | 7'-6"  | -     | -     |
| J       | 8 STRAIGHT  | 14'-6" | -     | -     |

NOTES  
 ALL BARS TO BE NUMBER 4.  
 BARS TO BE PLACED IN THE CENTER OF THE WALLS AND FLOOR.  
 NEED 820 LINEAL FEET OF REINFORCING BARS WITHOUT ANY WASTE.




EXPIRES 6/30/2003

FLUME SIDE ELEVATION VIEW

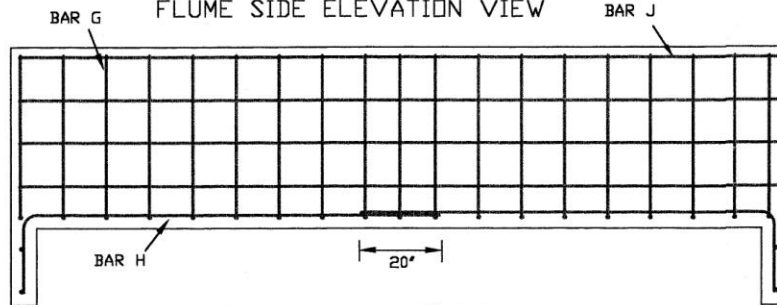

FLUME END WALL ELEVATION VIEW

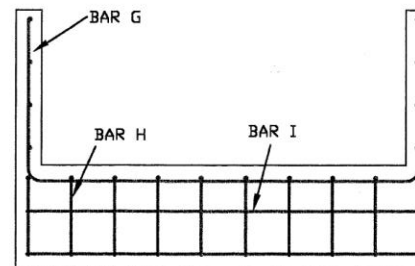


DATE \_\_\_\_\_  
 DESIGNED B. HEWES 4/03  
 PLOTTED \_\_\_\_\_  
 APPROVED \_\_\_\_\_




HUDSON BAY AQUIFER RECHARGE  
 PROJECT  
 STRUCTURE REINFORCING STEEL

CADFILE wh1teckst  
 SHEET 4  
 OF 4

LOCATION MAP

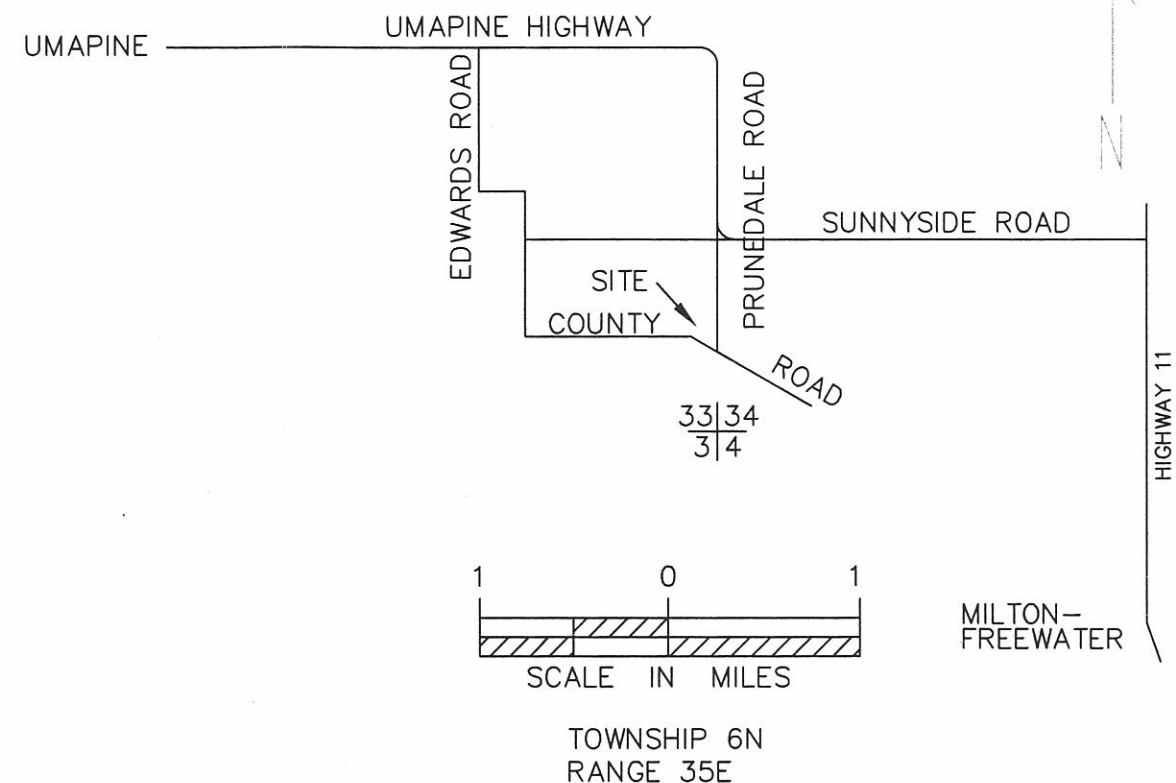

SITE PLAN VIEW

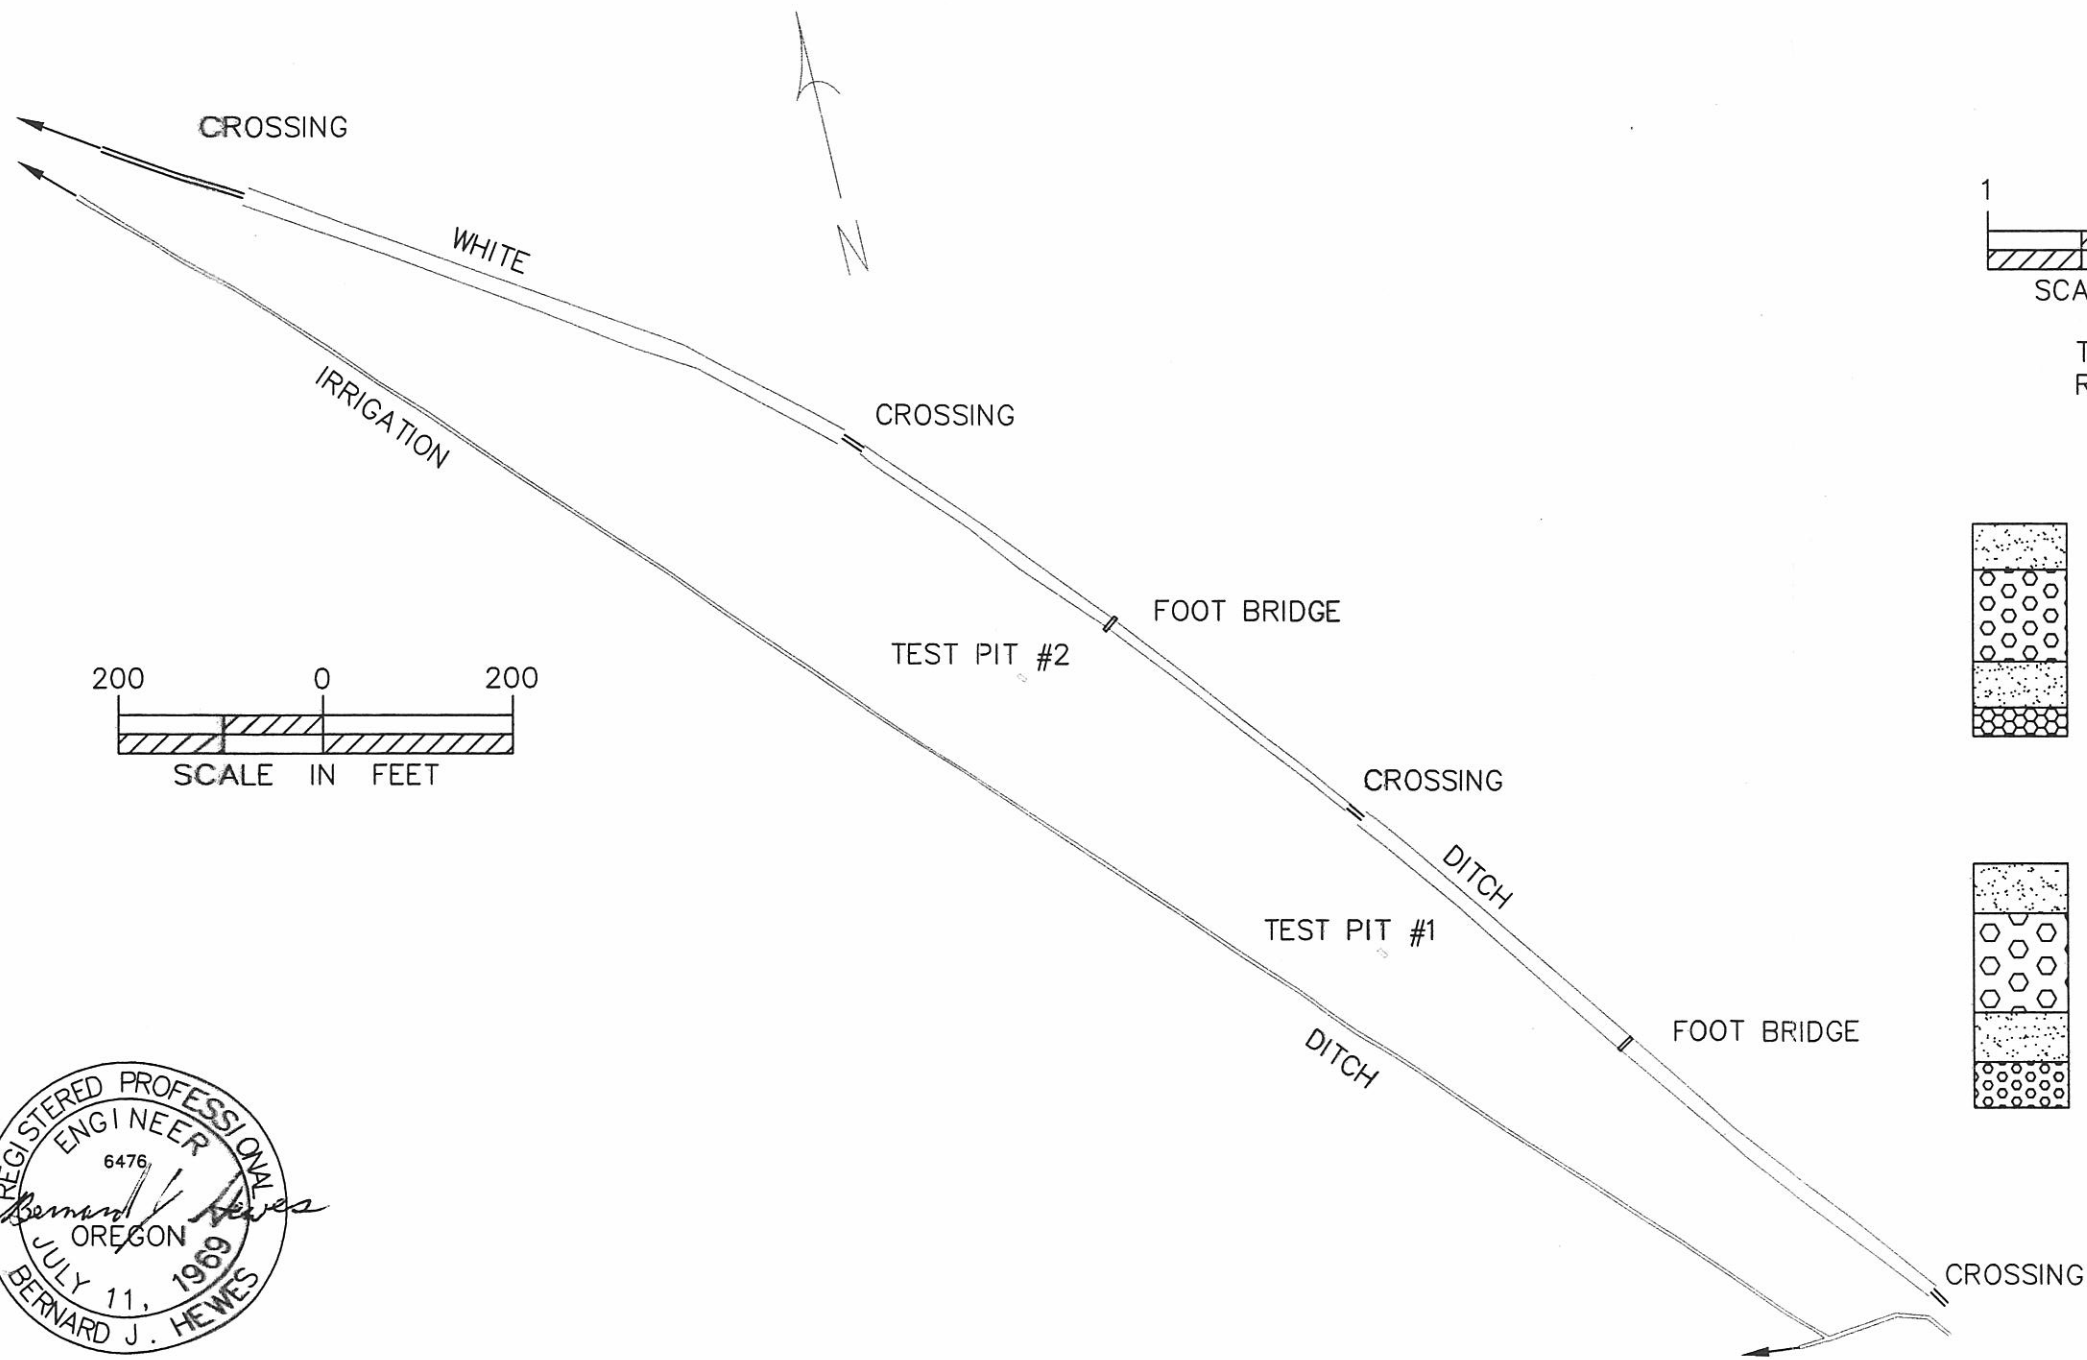

TOWNSHIP 6N  
RANGE 35E

TEST PIT #1

- 0-12" SANDY LOAM
- 12"-36" GRAVELY SANDY LOAM, APPROX. 50% OF THE VOLUME IS GRAVEL SIZE PARTICLES WITH AN ESTIMATED D<sub>50</sub> SIZE OF ABOUT 0.75".
- 36"-48" SANDY LOAM
- 48"-? GRAVELY SANDY LOAM APPROX. 20% OF THE VOLUME IS GRAVEL SIZE PARTICLES.

TEST PIT #2

- 0-13" GRAVELY SANDY LOAM
- 13"-39" COBBLY SANDY LOAM, THE D<sub>50</sub> OF THE GRAVEL IS APPROXIMATELY 1"
- 39"-52" GRAVELY SANDY LOAM
- 52"-? SAND GRAVEL MIX D<sub>50</sub> ESTIMATED TO BE ABOUT 0.25".

B. Hewes1/26/2007 11:35 AMwhitereloc.dwg

|                   |      |
|-------------------|------|
| DATE              | 4/03 |
| DESIGNED B. HEWES |      |
| PLOTTED           |      |
| APPROVED          |      |

WWBWC/HBDC UPPER RECHARGE PROJECT  
SITE PLAN & LOCATION MAP  
UMATILLA COUNTY, OREGON



CADFILE  
whitereloc

SHEET 1  
OF 7



EXPIRES 6/30/2009

SITE PLAN VIEW

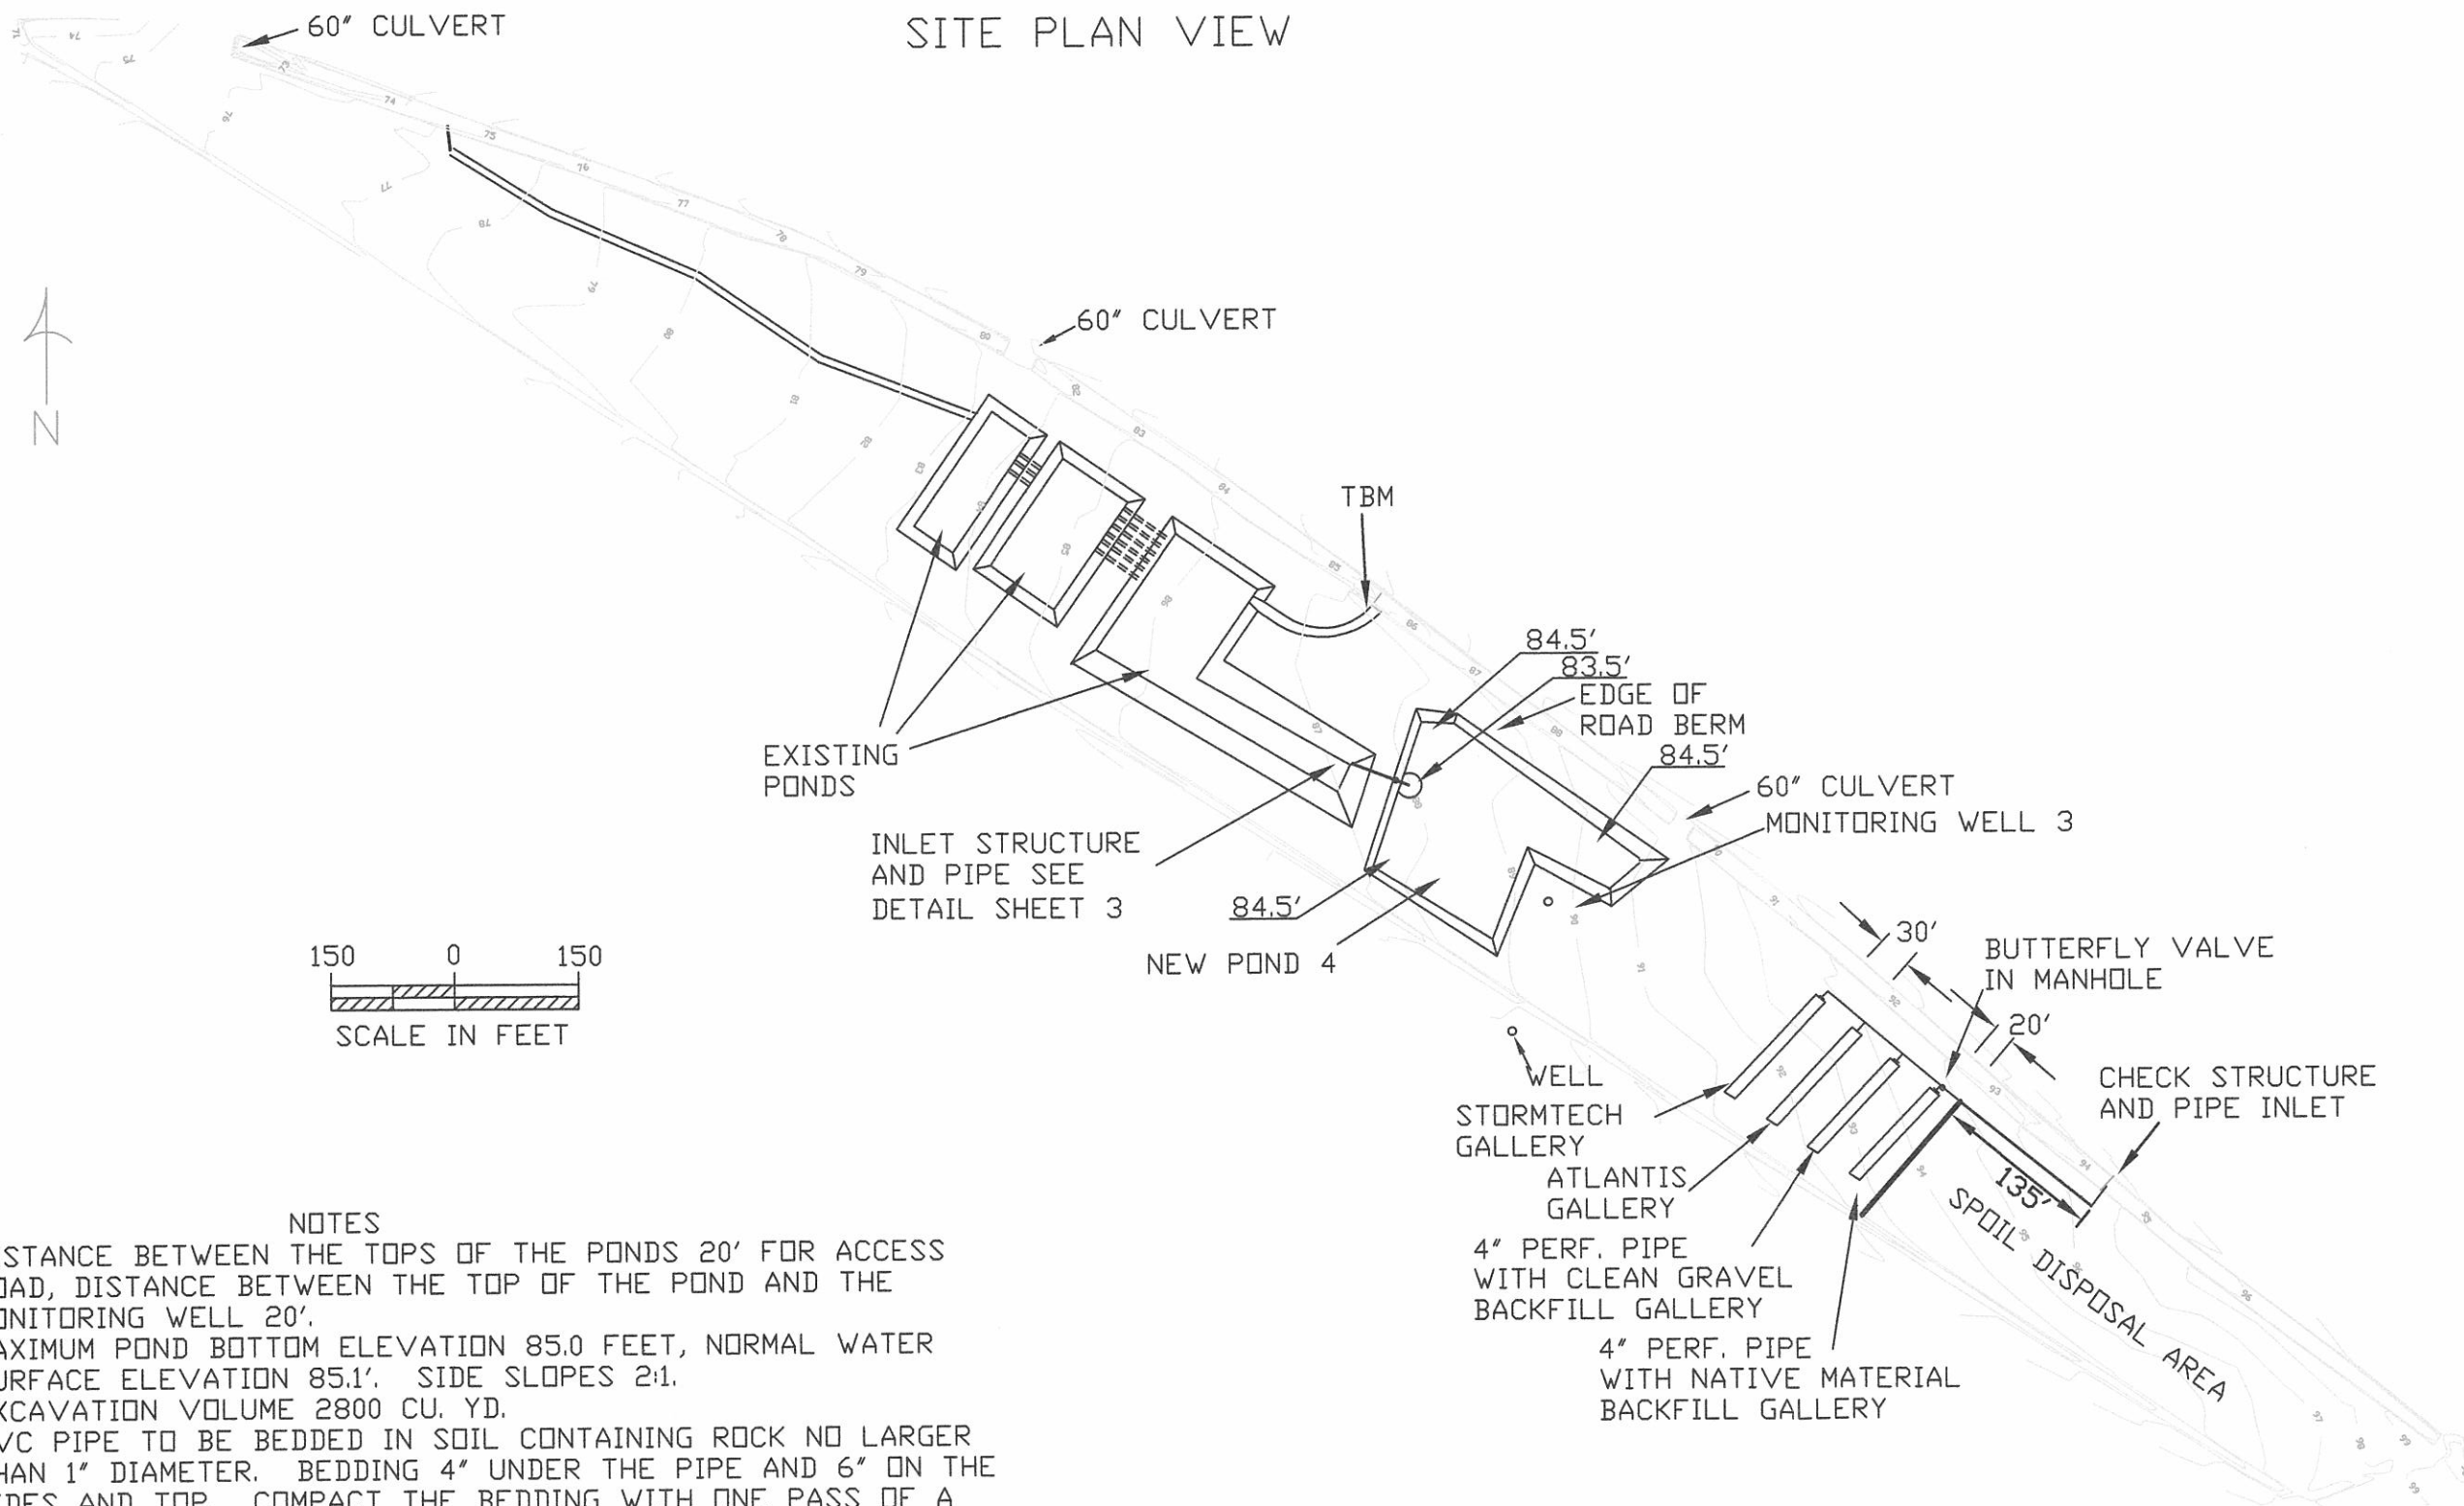

NOTES

DISTANCE BETWEEN THE TOPS OF THE PONDS 20' FOR ACCESS ROAD, DISTANCE BETWEEN THE TOP OF THE POND AND THE MONITORING WELL 20'.  
 MAXIMUM POND BOTTOM ELEVATION 85.0 FEET, NORMAL WATER SURFACE ELEVATION 85.1'. SIDE SLOPES 2:1.  
 EXCAVATION VOLUME 2800 CU. YD.  
 PVC PIPE TO BE BEDDED IN SOIL CONTAINING ROCK NO LARGER THAN 1" DIAMETER. BEDDING 4" UNDER THE PIPE AND 6" ON THE SIDES AND TOP. COMPACT THE BEDDING WITH ONE PASS OF A VIBRATING PLATE COMPACTOR OVER 6" LOOSE LIFTS.  
 CONSIDER FLOW METERS: AQUA MASTER MODEL 900R FROM JENNINGS INC.  
 McCROMETER MODEL ED300 PROPELLER STYLE METER.  
 CHECK FOR COMPATIBILITY WITH YOUR EXISTING RECORDING AND CONTROL EQUIPMENT.  
 SPACE THE DIFFERENT KIND OF GALLERIES 30'.  
 TBM IS AT THE TOP OF THE RIGHT SIDE WALL, DOWNSTREAM END OF THE FLUME. ELEVATION 88.7 FEET.



EXPIRES 6/30/2009

B. Hewes/2/1/2008 1159 A\whitext\p1n2.dwg


DATE \_\_\_\_\_  
 DESIGNED B. HEWES 11/07  
 PLOTTED \_\_\_\_\_  
 APPROVED \_\_\_\_\_

WWBWC/HBDC UPPER RECHARGE PROJECT  
 SITE PLAN  
 UMATILLA COUNTY, OREGON

CADFILE  
 whitextpln2

SHEET 2  
 OF 7


SUPPLY PIPE TO POND 4 PLAN VIEW

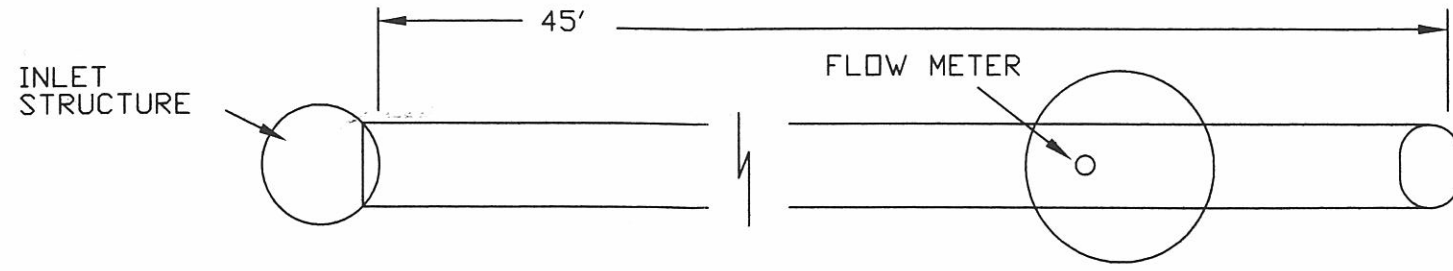


NOTES

CUT THE HOLE IN THE INLET STRUCTURE TO CLOSELY FIT AROUND THE SUPPLY PIPE. FILL THE SPACE BETWEEN THE STRUCTURE AND PIPES WITH CAULKING ON BOTH SIDES.  
 THE BOTTOM LIP OF THE 45° ELBOW CAN BE NO LESS THAN 0.2' BELOW THE TOP OF THE 21" PIPE.  
 LID FOR THE CMP MANHOLE TO BE GALVANIZED  $\frac{1}{8}$ " THICK STEEL.  
 SLIDE GATE TO BE A WATERMAN C-8-4 OR EQUIVALENT. INSTALL A CATWALK FOR ACCESS TO THE SLIDE GATE.


SIDE ELEVATION VIEW TYPICAL

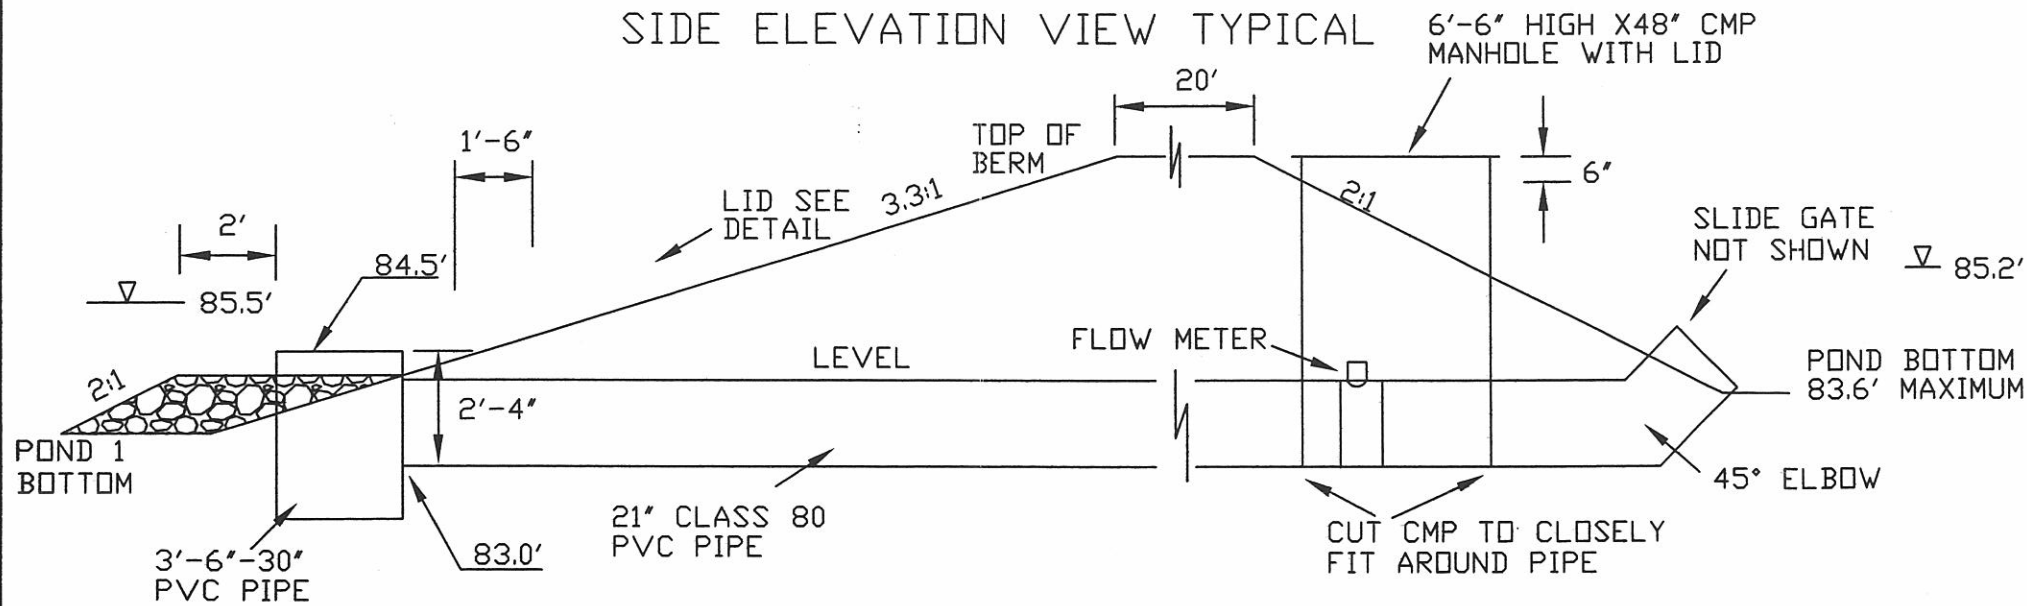


GALLERY SUPPLY PIPE VALVE DETAILS ELEVATION VIEW

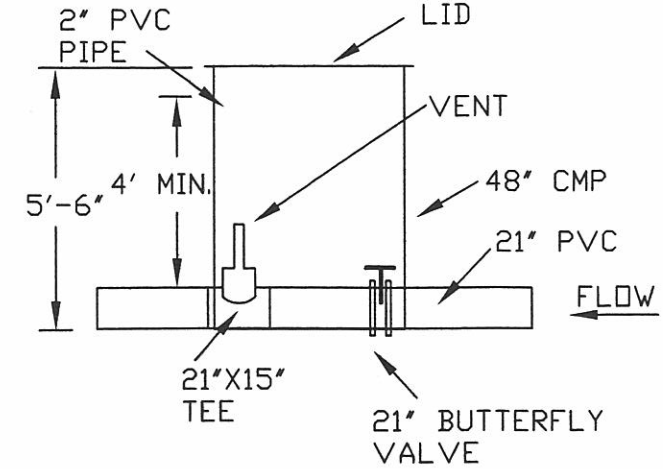

MANHOLE LID HOLD DOWN PERSPECTIVE VIEW

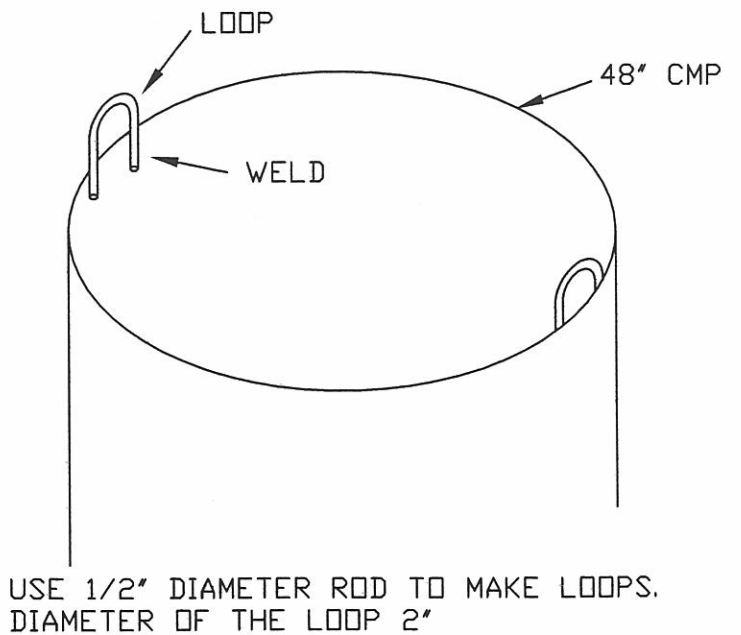

INLET STRUCTURE TRASH RACK DETAIL PERSPECTIVE VIEW

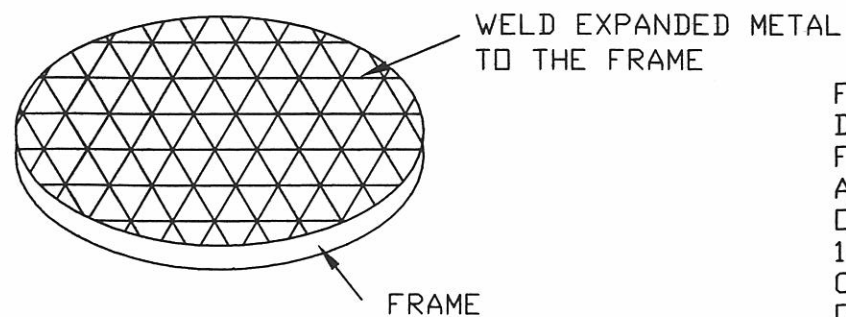

FRAME IS  $\frac{1}{8}$ " X 3" STEEL, INSIDE DIAMETER 32". COVER TO BE FLATTENED EXPANDED METAL APPROXIMATELY 0.120" THICK; OPENINGS APPROXIMATELY  $1\frac{1}{2}$ " X  $1\frac{5}{8}$ ".  
 CLEAN AND PAINT WITH 2 COATS OF HIGH ZINC COLD GALVANIZING PAINT.


|          |          |
|----------|----------|
| DATE     | 11/07    |
| DESIGNED | B. HEWES |
| CHECKED  |          |
| APPROVED |          |

WWBWC/HBDC UPPER RECHARGE PROJECT  
 MISCELLANEOUS DETAILS  
 UMATILLA COUNTY, OREGON  
 B H ENGINEERING






TYPICAL 4" PERFORATED PIPE GALLERY  
PLAN VIEW

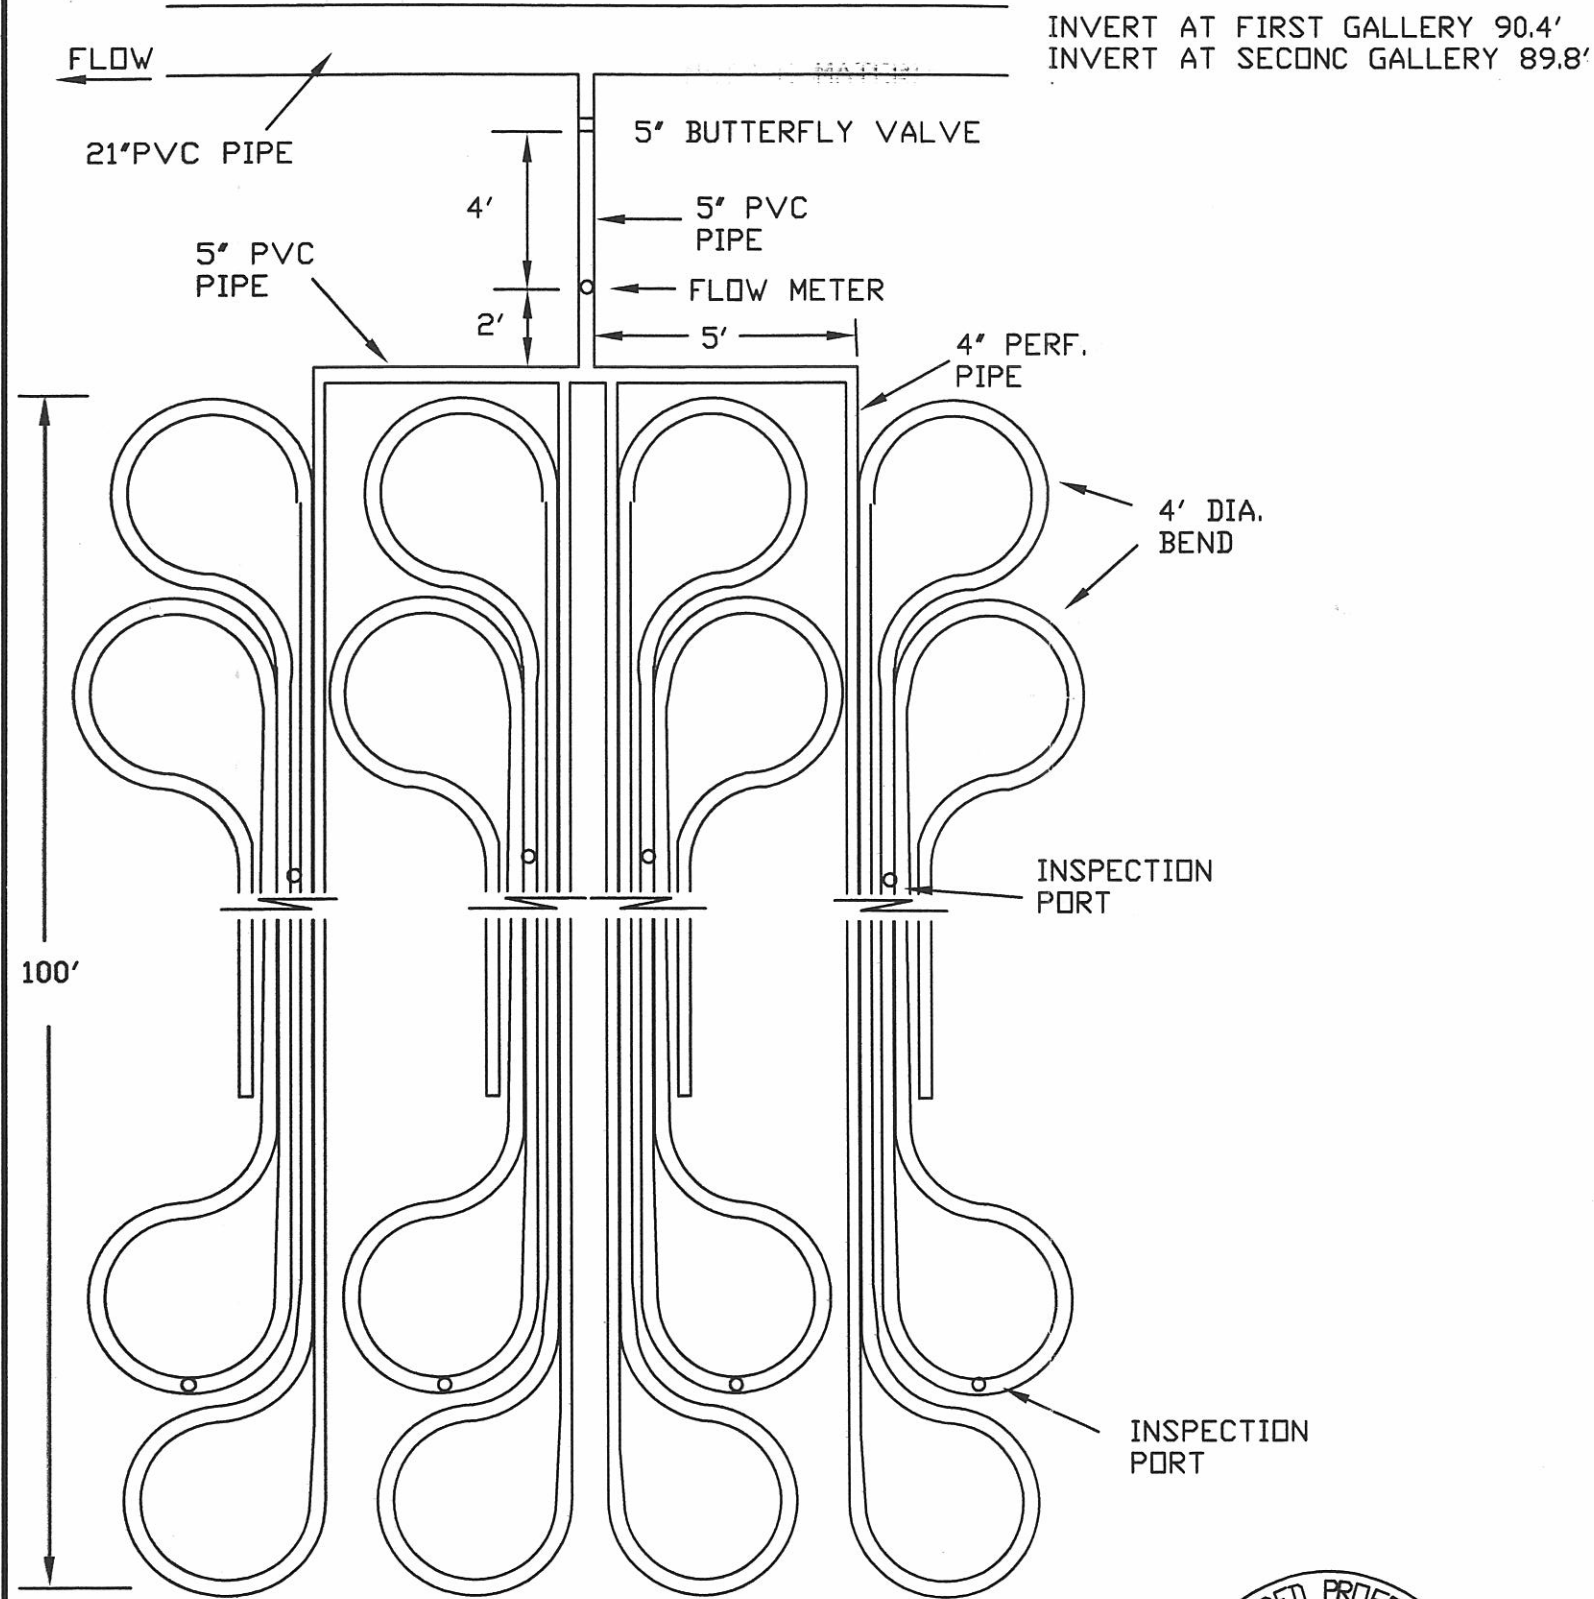

NOTE: ON THIS SIDE THE PERF. PIPE CHANGED TO SMOOTH DRAIN FIELD PIPE WITH A TEE FOR EACH PIPE ROW, 20 ROWS.

INVERT AT FIRST GALLERY 90.4'  
INVERT AT SECOND GALLERY 89.8'


4" PERFORATED PIPE WITH  
NATIVE MATERIAL BACKFILL  
ELEVATION VIEW

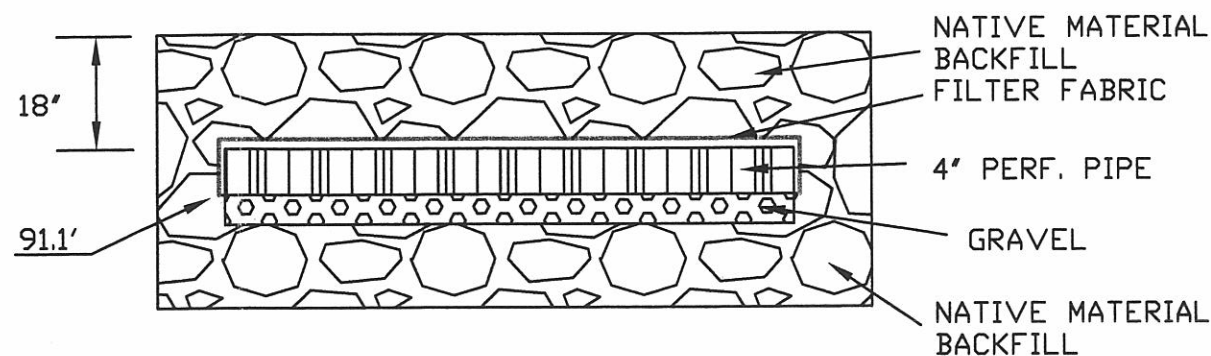

NOTES

NEED 2000' OF ADS 4" SINGLE WALL, PERFORATED, CORRUGATED POLYETHYLENE PIPE OR EQUIVALENT. CONNECT THE 4" TO THE 5" PIPE USING A MAR-MAC POLYSEAL PIPE COUPLER OR EQUIVALENT. USE ONLY ENOUGH GRAVEL BEDDING TO PROVIDE A SMOOTH SURFACE TO LAY THE PIPE ON OR REMOVE ALL ROCK GREATER THAN 2" IN DIAMETER FROM CONTACTING THE PIPE. THE INSPECTION PORT TO BE INSTALLED WHERE THE TWO PIPE ROLLS CONNECT AND NEAR THE END AS SHOWN. CONNECT THE ROLLS WITH A 4" TEE, USE 2' OF VERTICAL 4" PERF. PIPE WRAPPED WITH FILTER FABRIC FOR AN INSPECTION PORT. INSTALL A 4" CAP ON THE END OF THE PIPE AND INSPECTION PORT. THE FILTER FABRIC TO BE ADS 4000 NONWOVEN OR EQUIVALENT. ABOUT 75 SQ. YD. NEEDED.

4" DRAIN FIELD PIPE WITH  
GRAVEL BEDDING  
ELEVATION VIEW

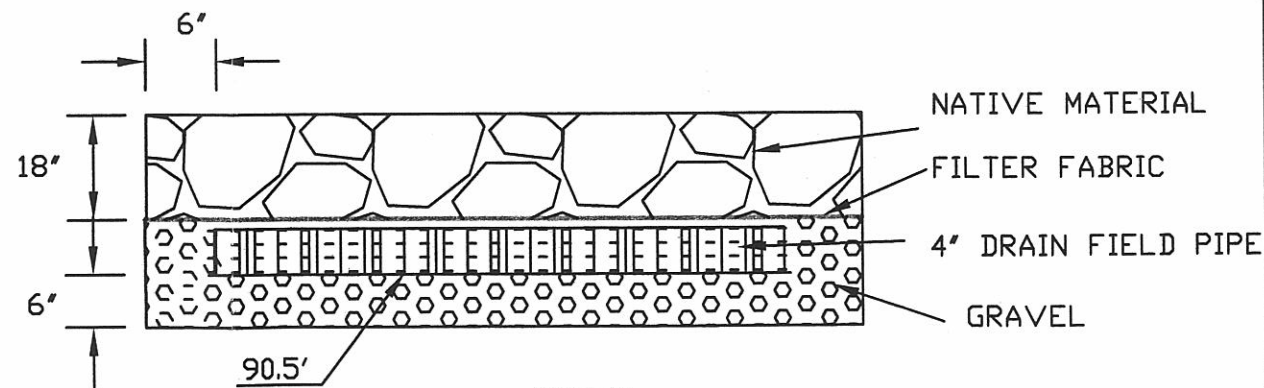

NOTES

NEED 2000' OF 4" PVC DRAIN FIELD PIPE. CONNECT THE 4" TO THE 5" PIPE USING A MAR-MAC POLYSEAL PIPE COUPLER OR EQUIVALENT. THE INSPECTION PORTS TO BE INSTALLED NEAR THE MIDDLE OF ONE OF THE ROWS AND NEAR THE END. USE 2' OF VERTICAL 4" PIPE WRAPPED WITH FILTER FABRIC FOR AN INSPECTION PORT. INSTALL A 4" CAP ON THE END OF THE PIPE AND INSPECTION PORT. THE FILTER FABRIC TO BE ADS 4000 NONWOVEN OR EQUIVALENT. ABOUT 75 SQ. YD. NEEDED. GRAVEL TO BE ANGULAR CRUSHED ROCK WITH THE MAJORITY BEING 3/4"-2", ABOUT 60 CU. YD. NEEDED.




EXPIRES 6/30/2009

|          |          |
|----------|----------|
| DATE     | 12/07    |
| DESIGNED | B. HEWES |
| CHECKED  |          |
| APPROVED |          |


WWBWC/HBDC UPPER RECHARGE PROJECT  
 4" PERF. & DRAIN FIELD PIPE DETAILS  
 UMATILLA COUNTY, OREGON  
 B H ENGINEERING

|          |           |
|----------|-----------|
| CAD FILE | whiteperf |
| SHEET 4  | OF 7      |

### ATLANTIS RAIN TANK DETAIL PLAN VIEW

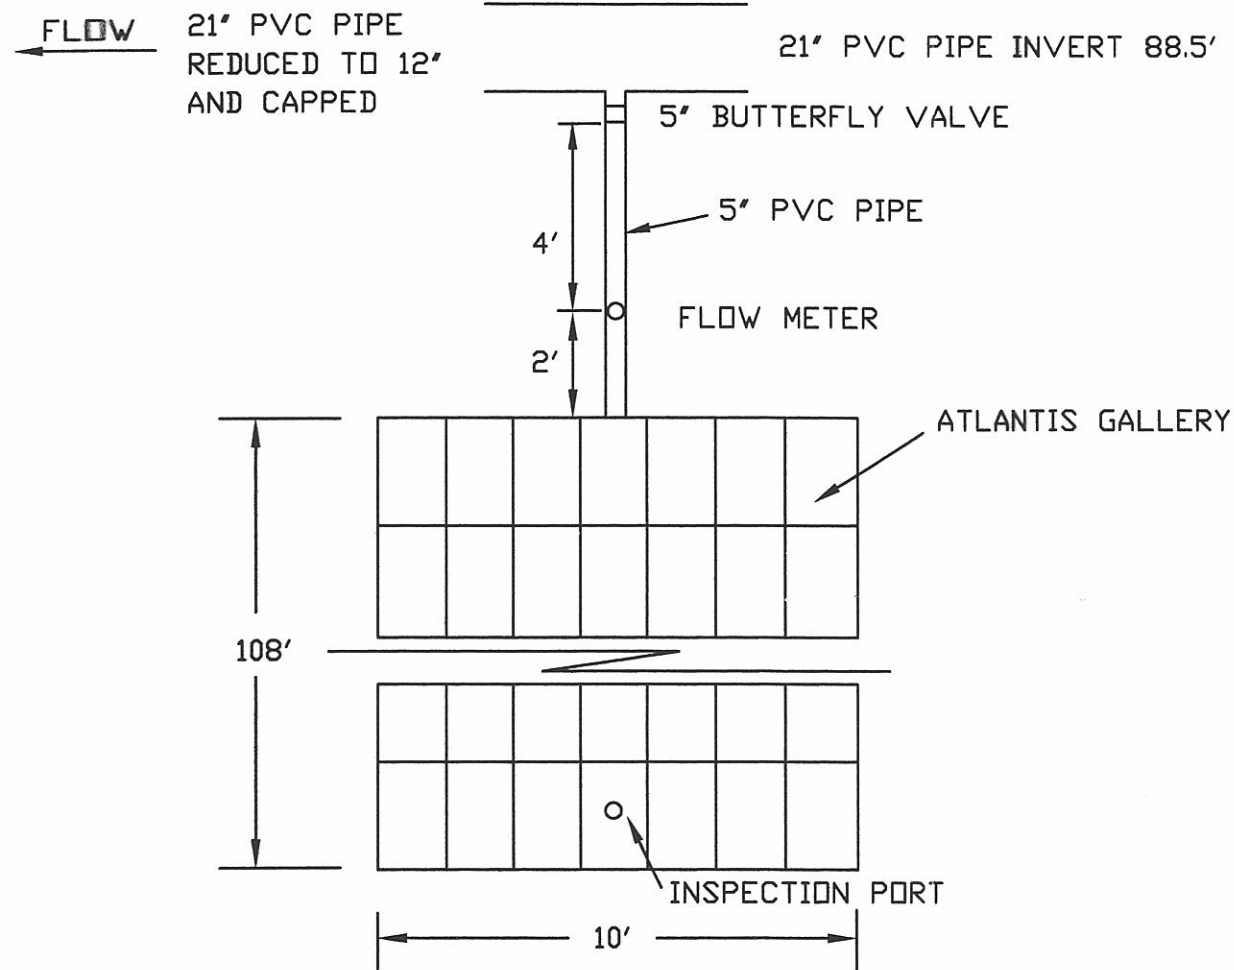


### ELEVATION VIEW

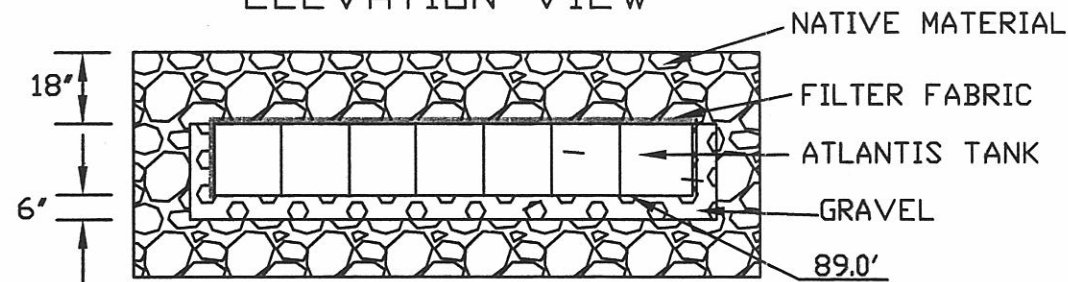


#### NOTES

ASSEMBLE AND INSTALL RAIN TANKS AND INSPECTION PORT AS DESCRIBED IN THE MANUFACTURERS LITERATURE. TANKS ARE 16" WIDE, 27" LONG AND 17 3/4" HIGH, NEED 336 TANKS FOR H-10 LOADING. USE 4" PVC PIPE FOR THE PORT, EXTEND 1' ABOVE GROUND AND PROTECT WITH A FENCE POST AND END CAP.  
 FILTER FABRIC TO BE ADS 4000 OR EQUIVALENT, NEED 160 SQ. YD. FOLD AND TAPE THE CORNERS AS SHOWN IN THE LITERATURE.  
 GRAVEL TO BE ANGULAR CRUSHED ROCK WITH THE MAJORITY OF PARTICLES BETWEEN 3/4"-2", NEED ABOUT 25 CU. YD.

### STORMTECH CHAMBER PLAN VIEW

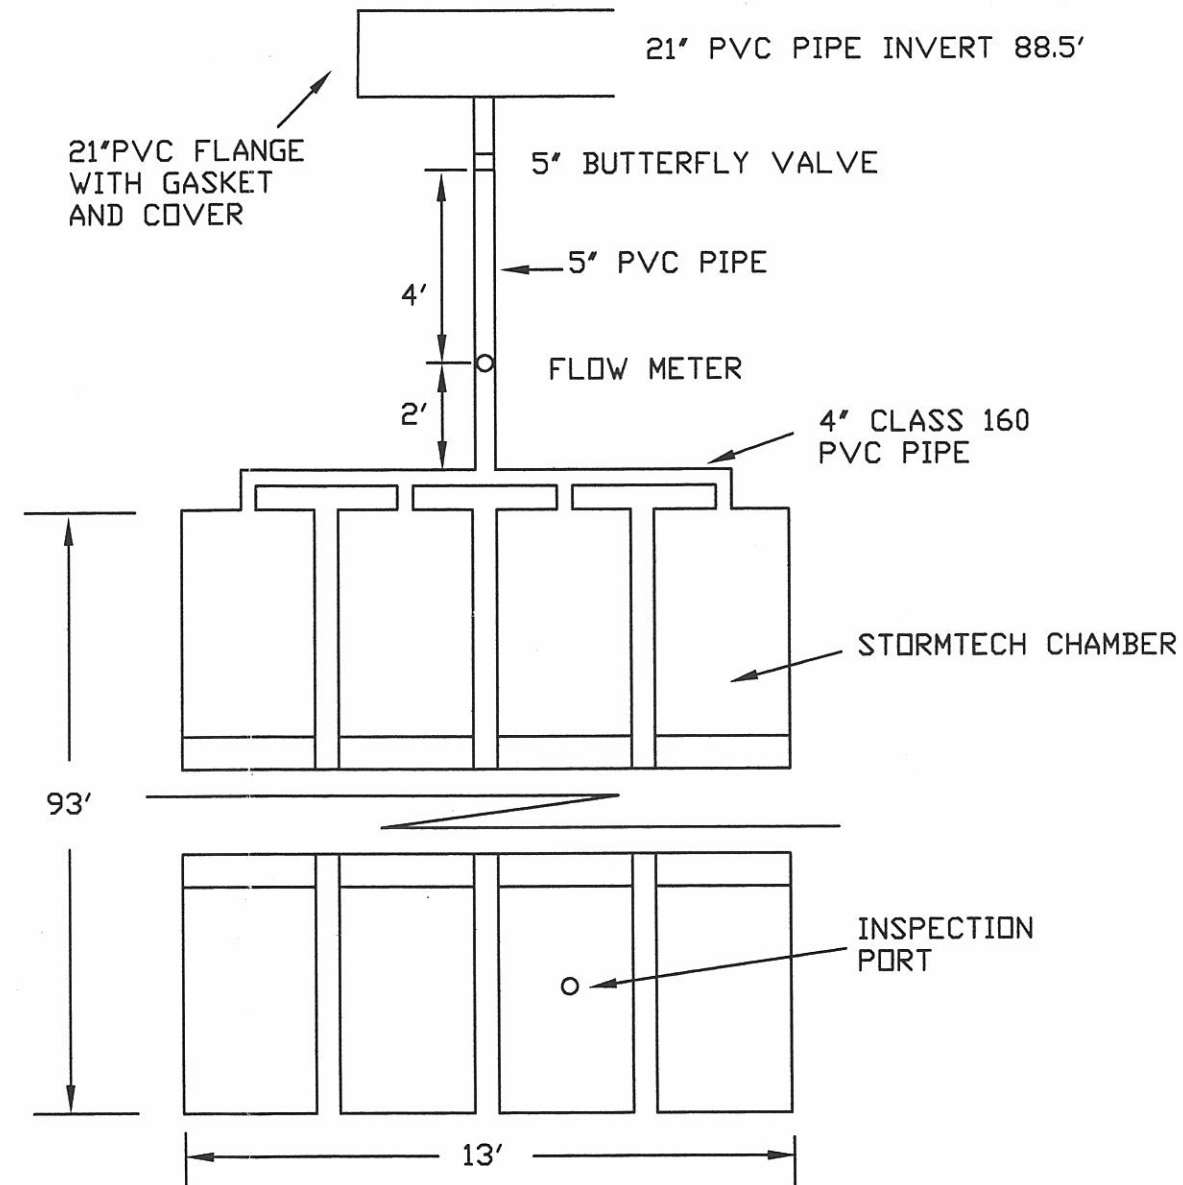

### ELEVATION VIEW

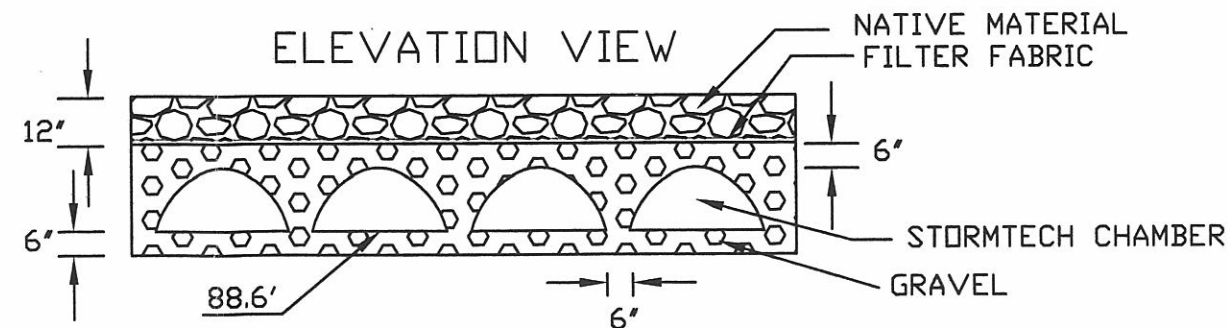

#### NOTES

ASSEMBLE AND INSTALL CHAMBERS AND INSPECTION PORT AS SHOWN IN THE MANUFACTURERS LITERATURE. TANKS ARE 34" WIDE, 7'-2" LONG AND 16" HIGH, NEED 50 CHAMBERS. IN LIEU OF THE SUBSURFACE PORT SHOWN IN THE LITERATURE EXTEND THE PORT 1' ABOVE GROUND AND PROTECT WITH A FENCE POST AND END CAP.  
 FILTER FABRIC TO BE ADS 4000 OR EQUIVALENT, NEED 190 SQ. YD. GRAVEL TO BE ANGULAR CRUSHED ROCK WITH THE MAJORITY OF PARTICLES BETWEEN 3/4"-2", NEED ABOUT 115 CU. YD.



EXPIRES 6/30/2009

B. Hewes/4/2008 1106 A\Whiteatlantis.dwg


DATE 12/07  
 DESIGNED B. HEWES  
 CHECKED

WWBWC/HBDC UPPER RECHARGE PROJECT  
 ATLANTIS & STORMTECH CHAMBERS DETAILS  
 UMATILLA COUNTY, OREGON


CAD FILE  
 whiteatlar

SHEET 5  
 OF 7

STRUCTURE PERSPECTIVE VIEW

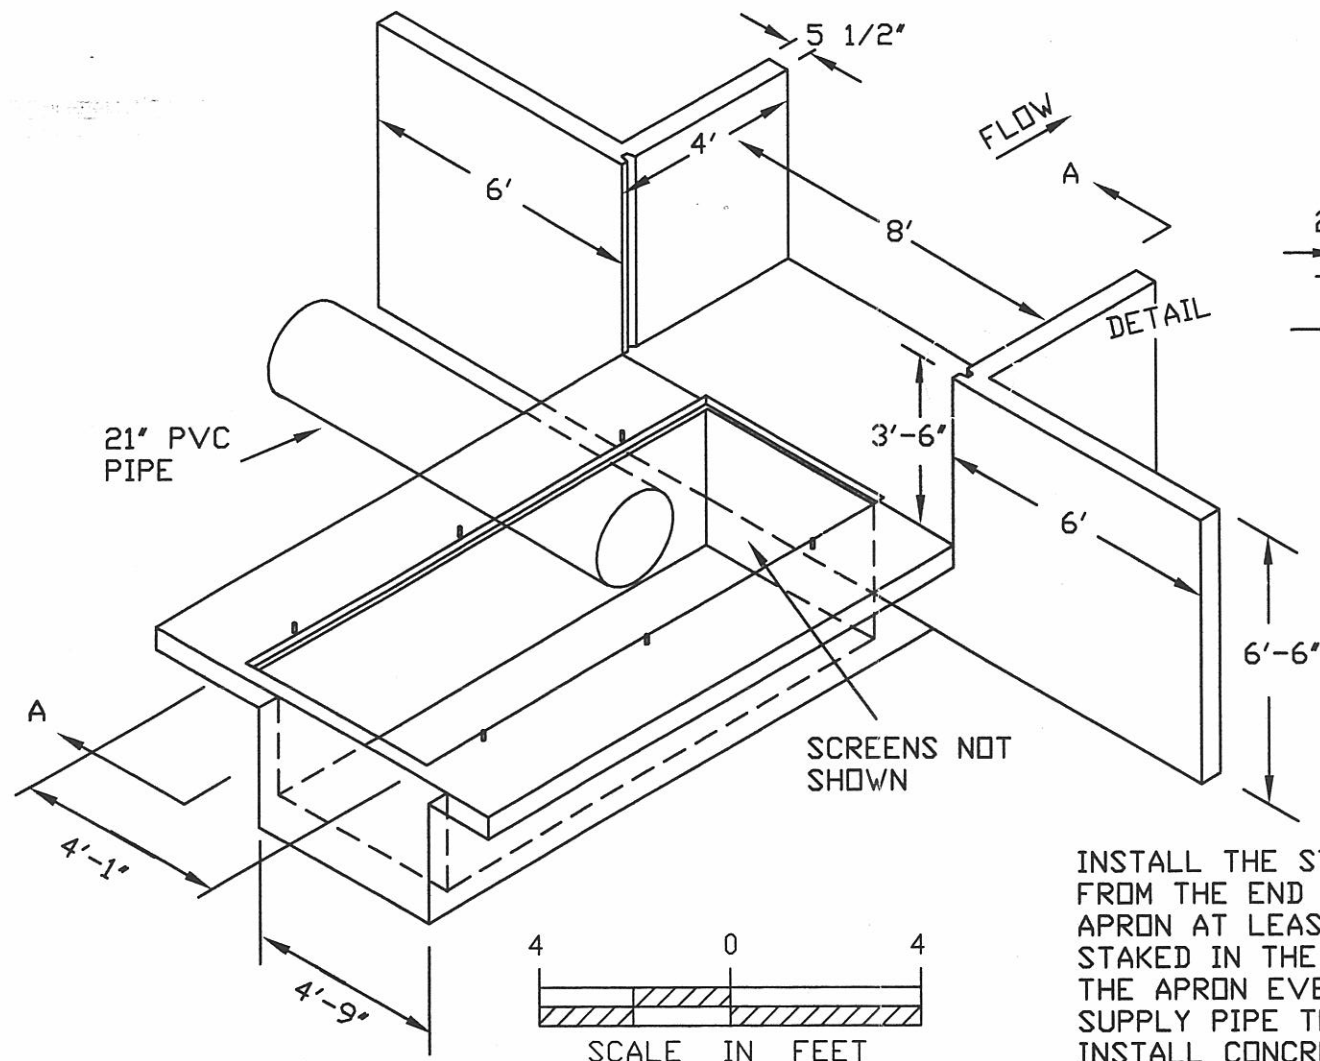


SECTION A

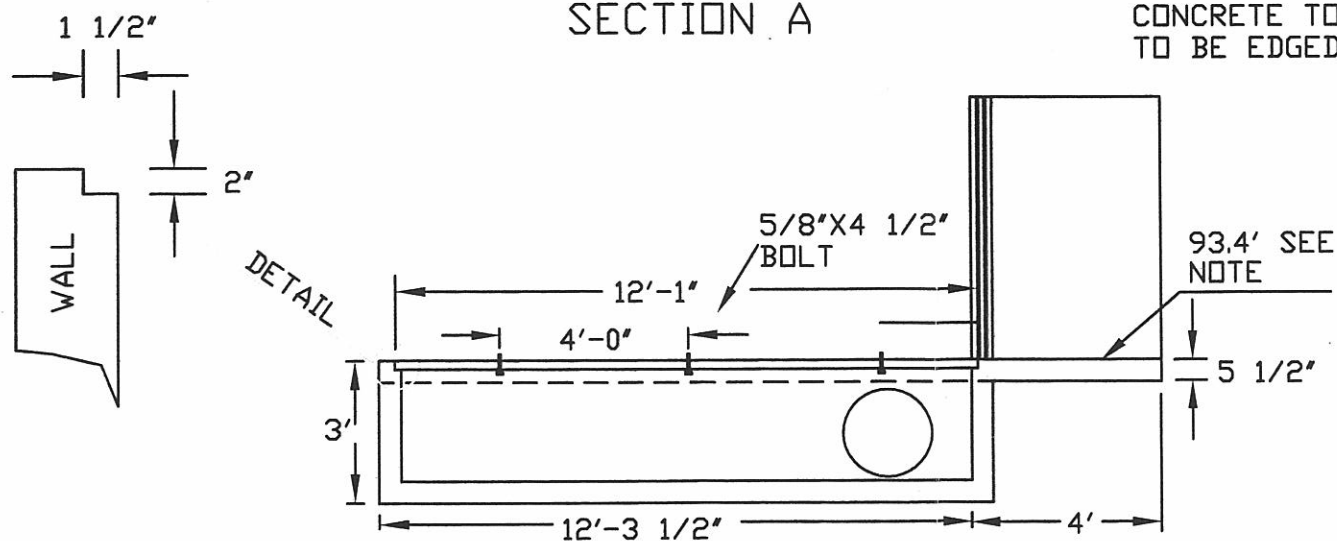


NOTE  
NOTCH IS ON ALL 4 SIDES OF THE BOX.  
BOLTS ARE TO HOLD DOWN THE SCREEN, USE A 1"X4"X1/2" BAR WITH A 3/4" DIAMETER HOLE 1" FROM ONE END.

NOTES  
INSTALL THE STRUCTURE ABOUT 135' UPSTREAM FROM THE END OF THE SPOIL PILE WITH THE APRON AT LEAST AT AN ELEVATION OF 93.4' AS STAKED IN THE FIELD. SET THE ELEVATION OF THE APRON EVEN WITH THE CHANNEL BOTTOM. SUPPLY PIPE TO BE 260'-21" CLASS 100 PVC. INSTALL CONCRETE ACCORDING TO NATURAL RESOURCES CONSERVATION SERVICE SPECIFICATION 42, REINFORCED CONCRETE FOR MINOR STRUCTURES. USE 4000 PSI STRENGTH CONCRETE, NEED 5.4 CU. YD. CONCRETE TO BE VIBRATED, ALL EXPOSED EDGES TO BE EDGED WITH AN EDGING TOOL.




EXPIRES 6/30/2009


SCREEN FRAME DETAIL

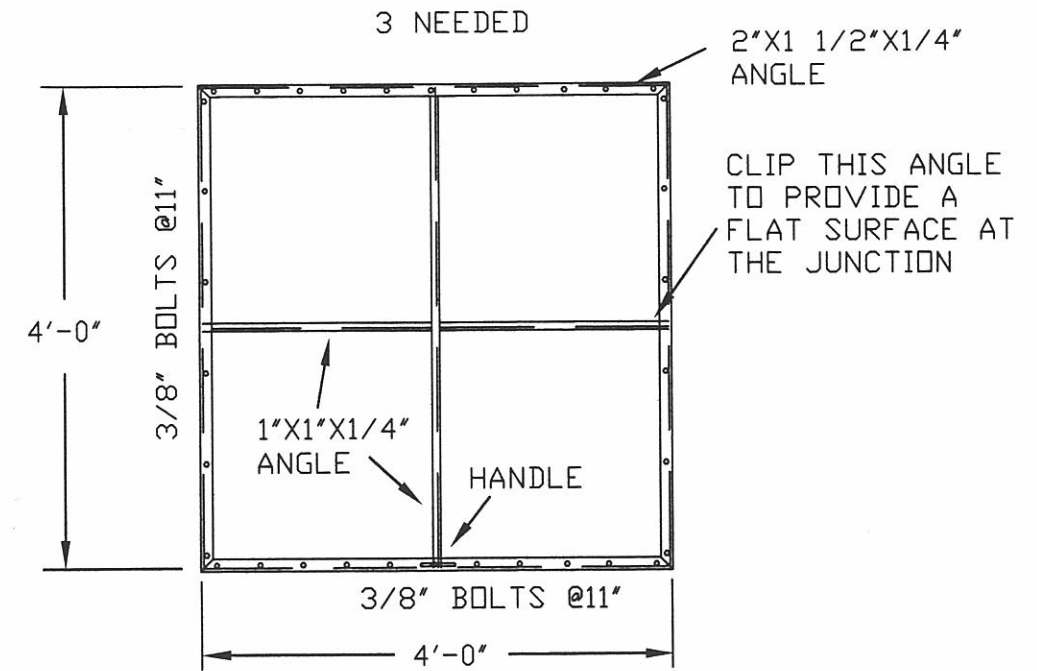

SCREEN FRAME DETAIL ELEVATION VIEW

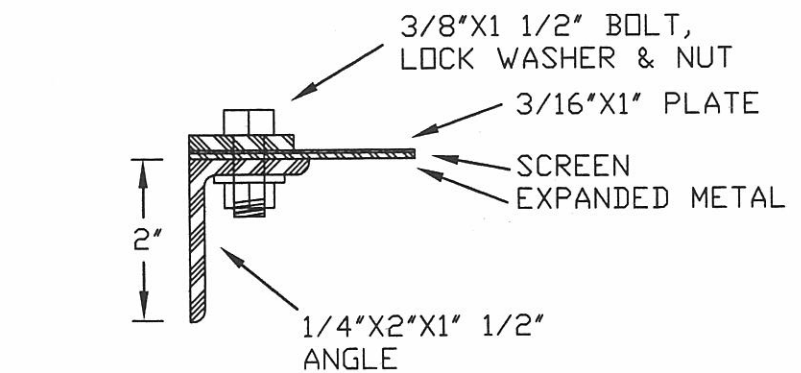

FRAME HANDLE DETAIL ELEVATION VIEW

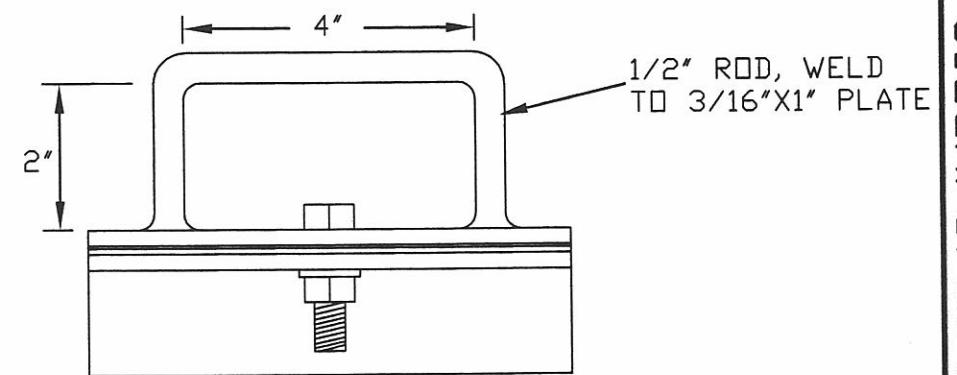

NOTES  
EXPANDED METAL TO BE CARBON STEEL, FLATTENED, 13 GAGE, 3/4" SHORT OPENING WIDTH.  
SCREEN TO BE TYPE 304 STAINLESS STEEL, 20 GAGE MINIMUM WITH 3/32" HOLES SPACED 5/32" STAGGERED.


DESIGNED BY B. HEWES  
CHECKED  
APPROVED

DATE 12/07


WWBWC/HBDC UPPER RECHARGE PROJECT  
CHECK & SCREEN STRUCTURE  
UMATILLA COUNTY, OREGON  
R H ENGINEERING

CAD FILE whitescreen  
SHEET 6 OF 7


HEADWALL LOOKING DOWNSTREAM  
ELEVATION VIEW

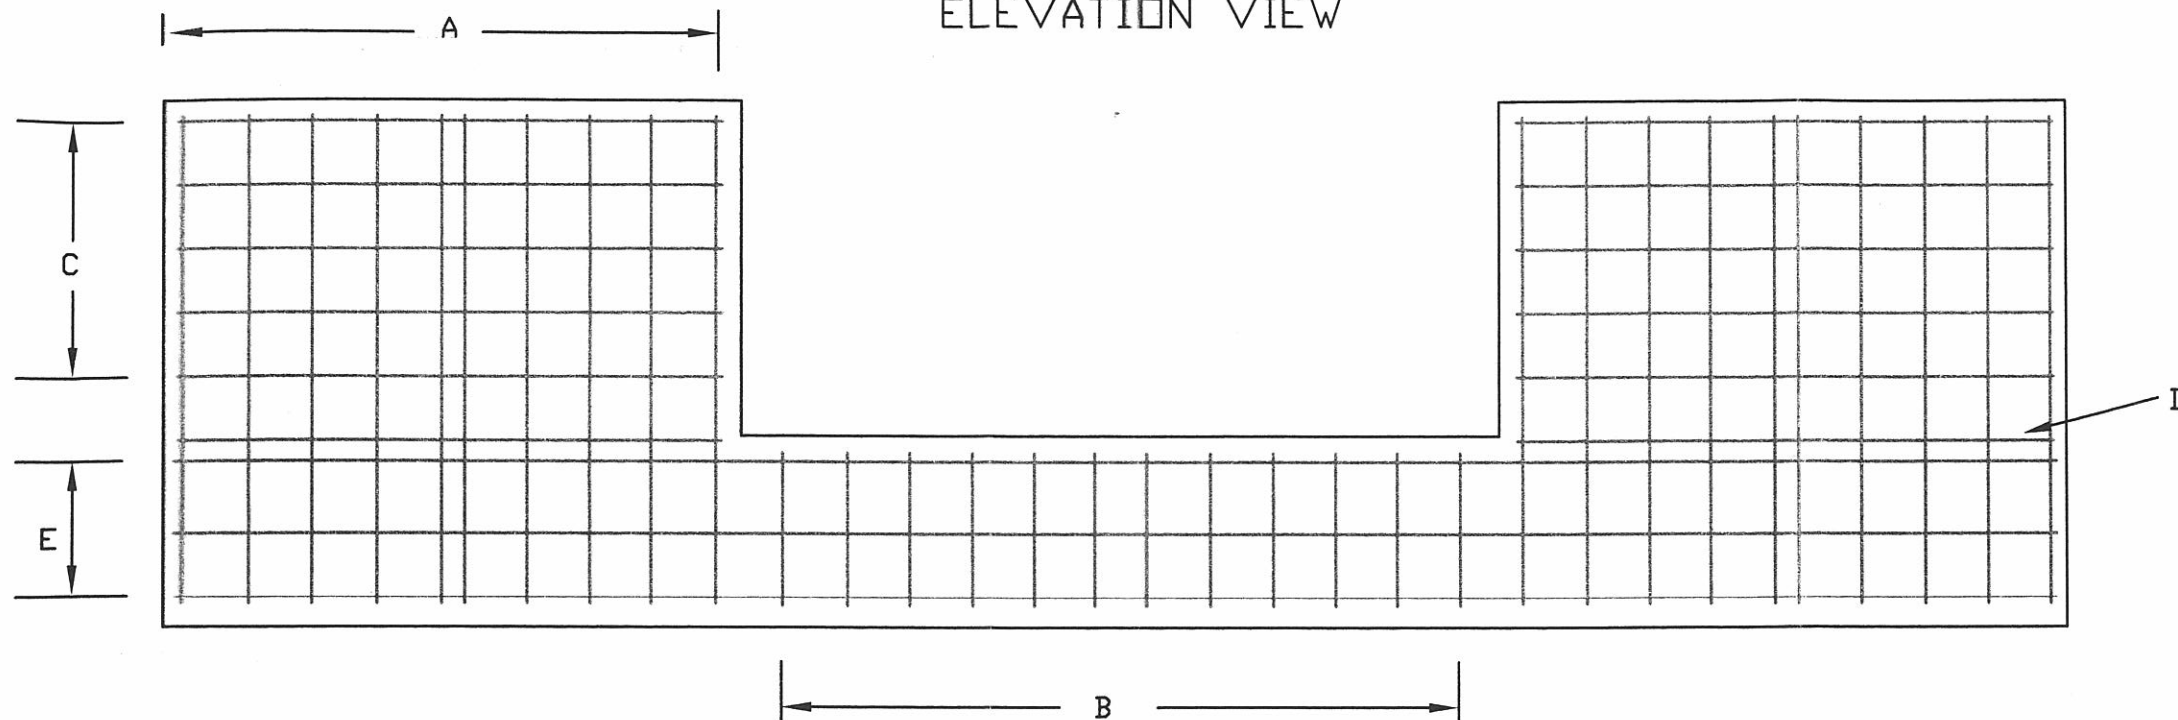

DOWNSTREAM SIDE WALL AND APRON  
END ELEVATION VIEW      SIDE ELEVATION VIEW

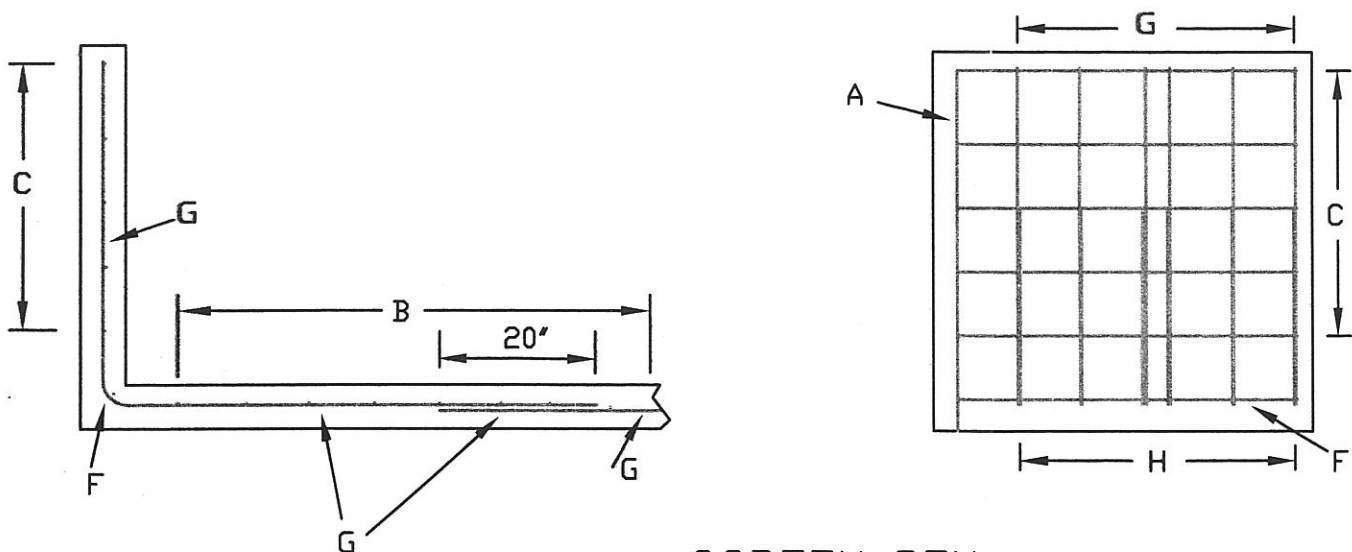

SCREEN BOX  
END ELEVATION VIEW

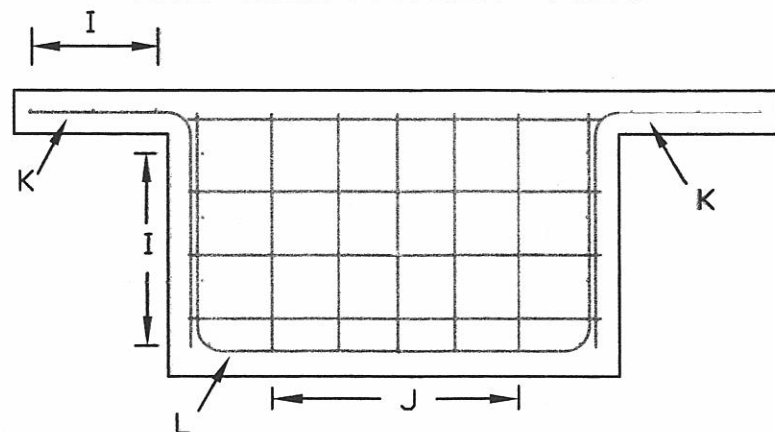

REINFORCING STEEL SCHEDULE  
ALL NUMBER 4 BARS, 8" NOMINAL SPACING

| BAR NO. | SHAPE        | A      | B     | C     |
|---------|--------------|--------|-------|-------|
| A       | 20 STRAIGHT  | 6'-1"  | --    | --    |
| B       | 12 A   B     | 2'-7"  | 3'-7" | --    |
| C       | 10 A   B     | 5'-7"  | 3'-9" | --    |
| D       | 2 STRAIGHT   | 5'-8"  | --    | --    |
| E       | 3 STRAIGHT   | 19'-8" | --    | --    |
| F       | 2 STRAIGHT   | 3'-7"  | --    | --    |
| G       | 12 A   B     | 3'-7"  | 5'-1" | --    |
| H       | 12 A   B     | 2'-0"  | 2'-0" | --    |
| I       | 14 STRAIGHT  | 12'-0" | --    | --    |
| J       | 5 A   B      | 2'-6"  | 3'-8" | --    |
| K       | 38 A   B     | 1'-9"  | 2'-6" | --    |
| L       | 19 A   B   C | 2'-6"  | 4'-3" | 2'-6" |

1080 FEET NEEDED WITHOUT ANY WASTE



EXPIRES 6/30/2009

B. Hewes 6/21/2008 11:11 AM whiterebar.dwg


DESIGNED B. HEWES  
CHECKED  
APPROVED

WBWC/HBDC UPPER RECHARGE PROJECT  
REINFORCING STEEL DETAILS  
UMATILLA COUNTY, OREGON  
B H ENGINEERING


CAD FILE  
whiterebar

SHEET 7  
OF 7



LOCATION MAP

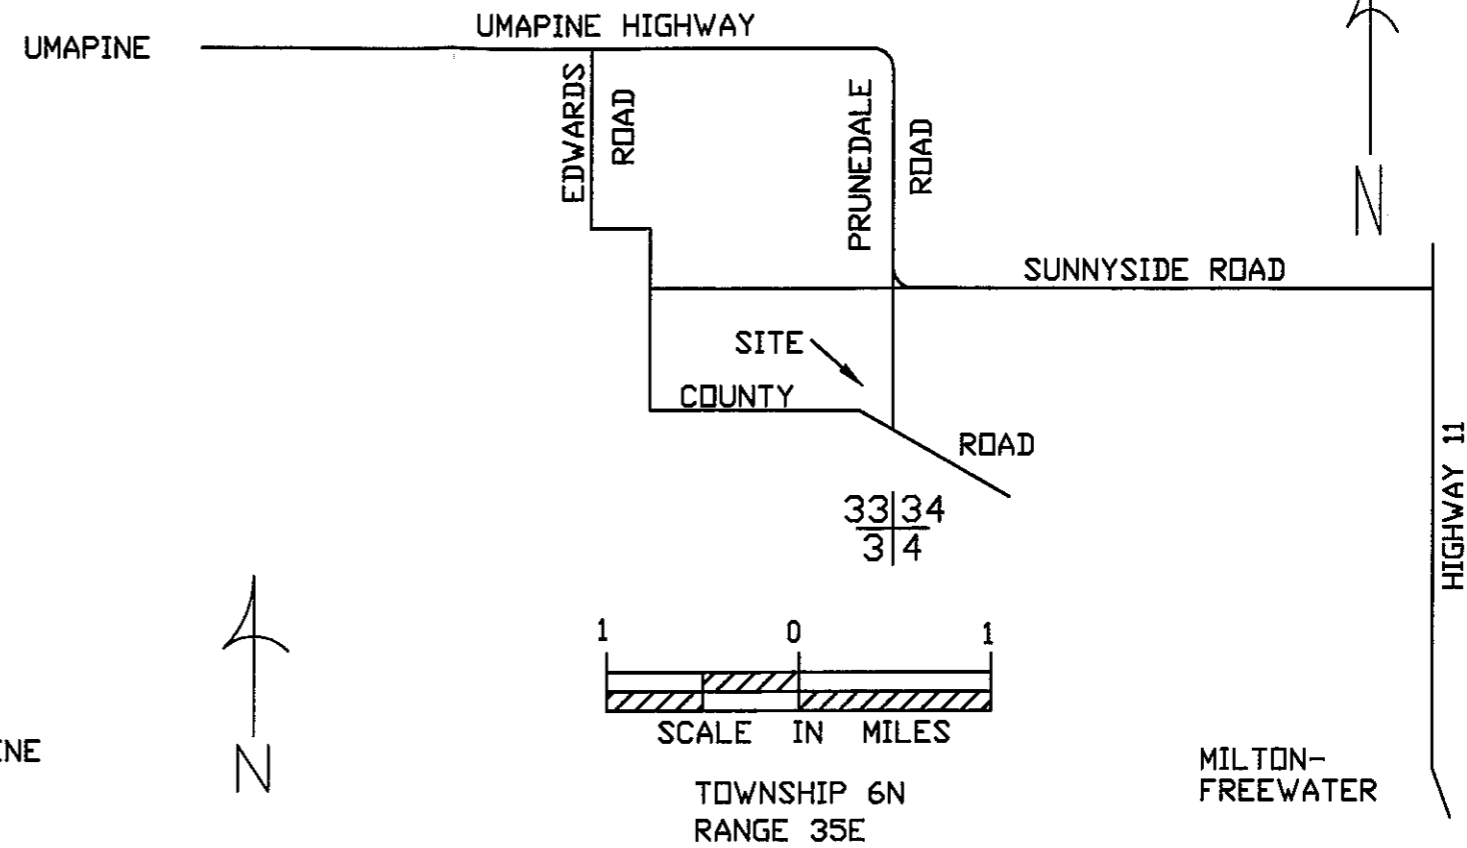

SITE PLAN VIEW

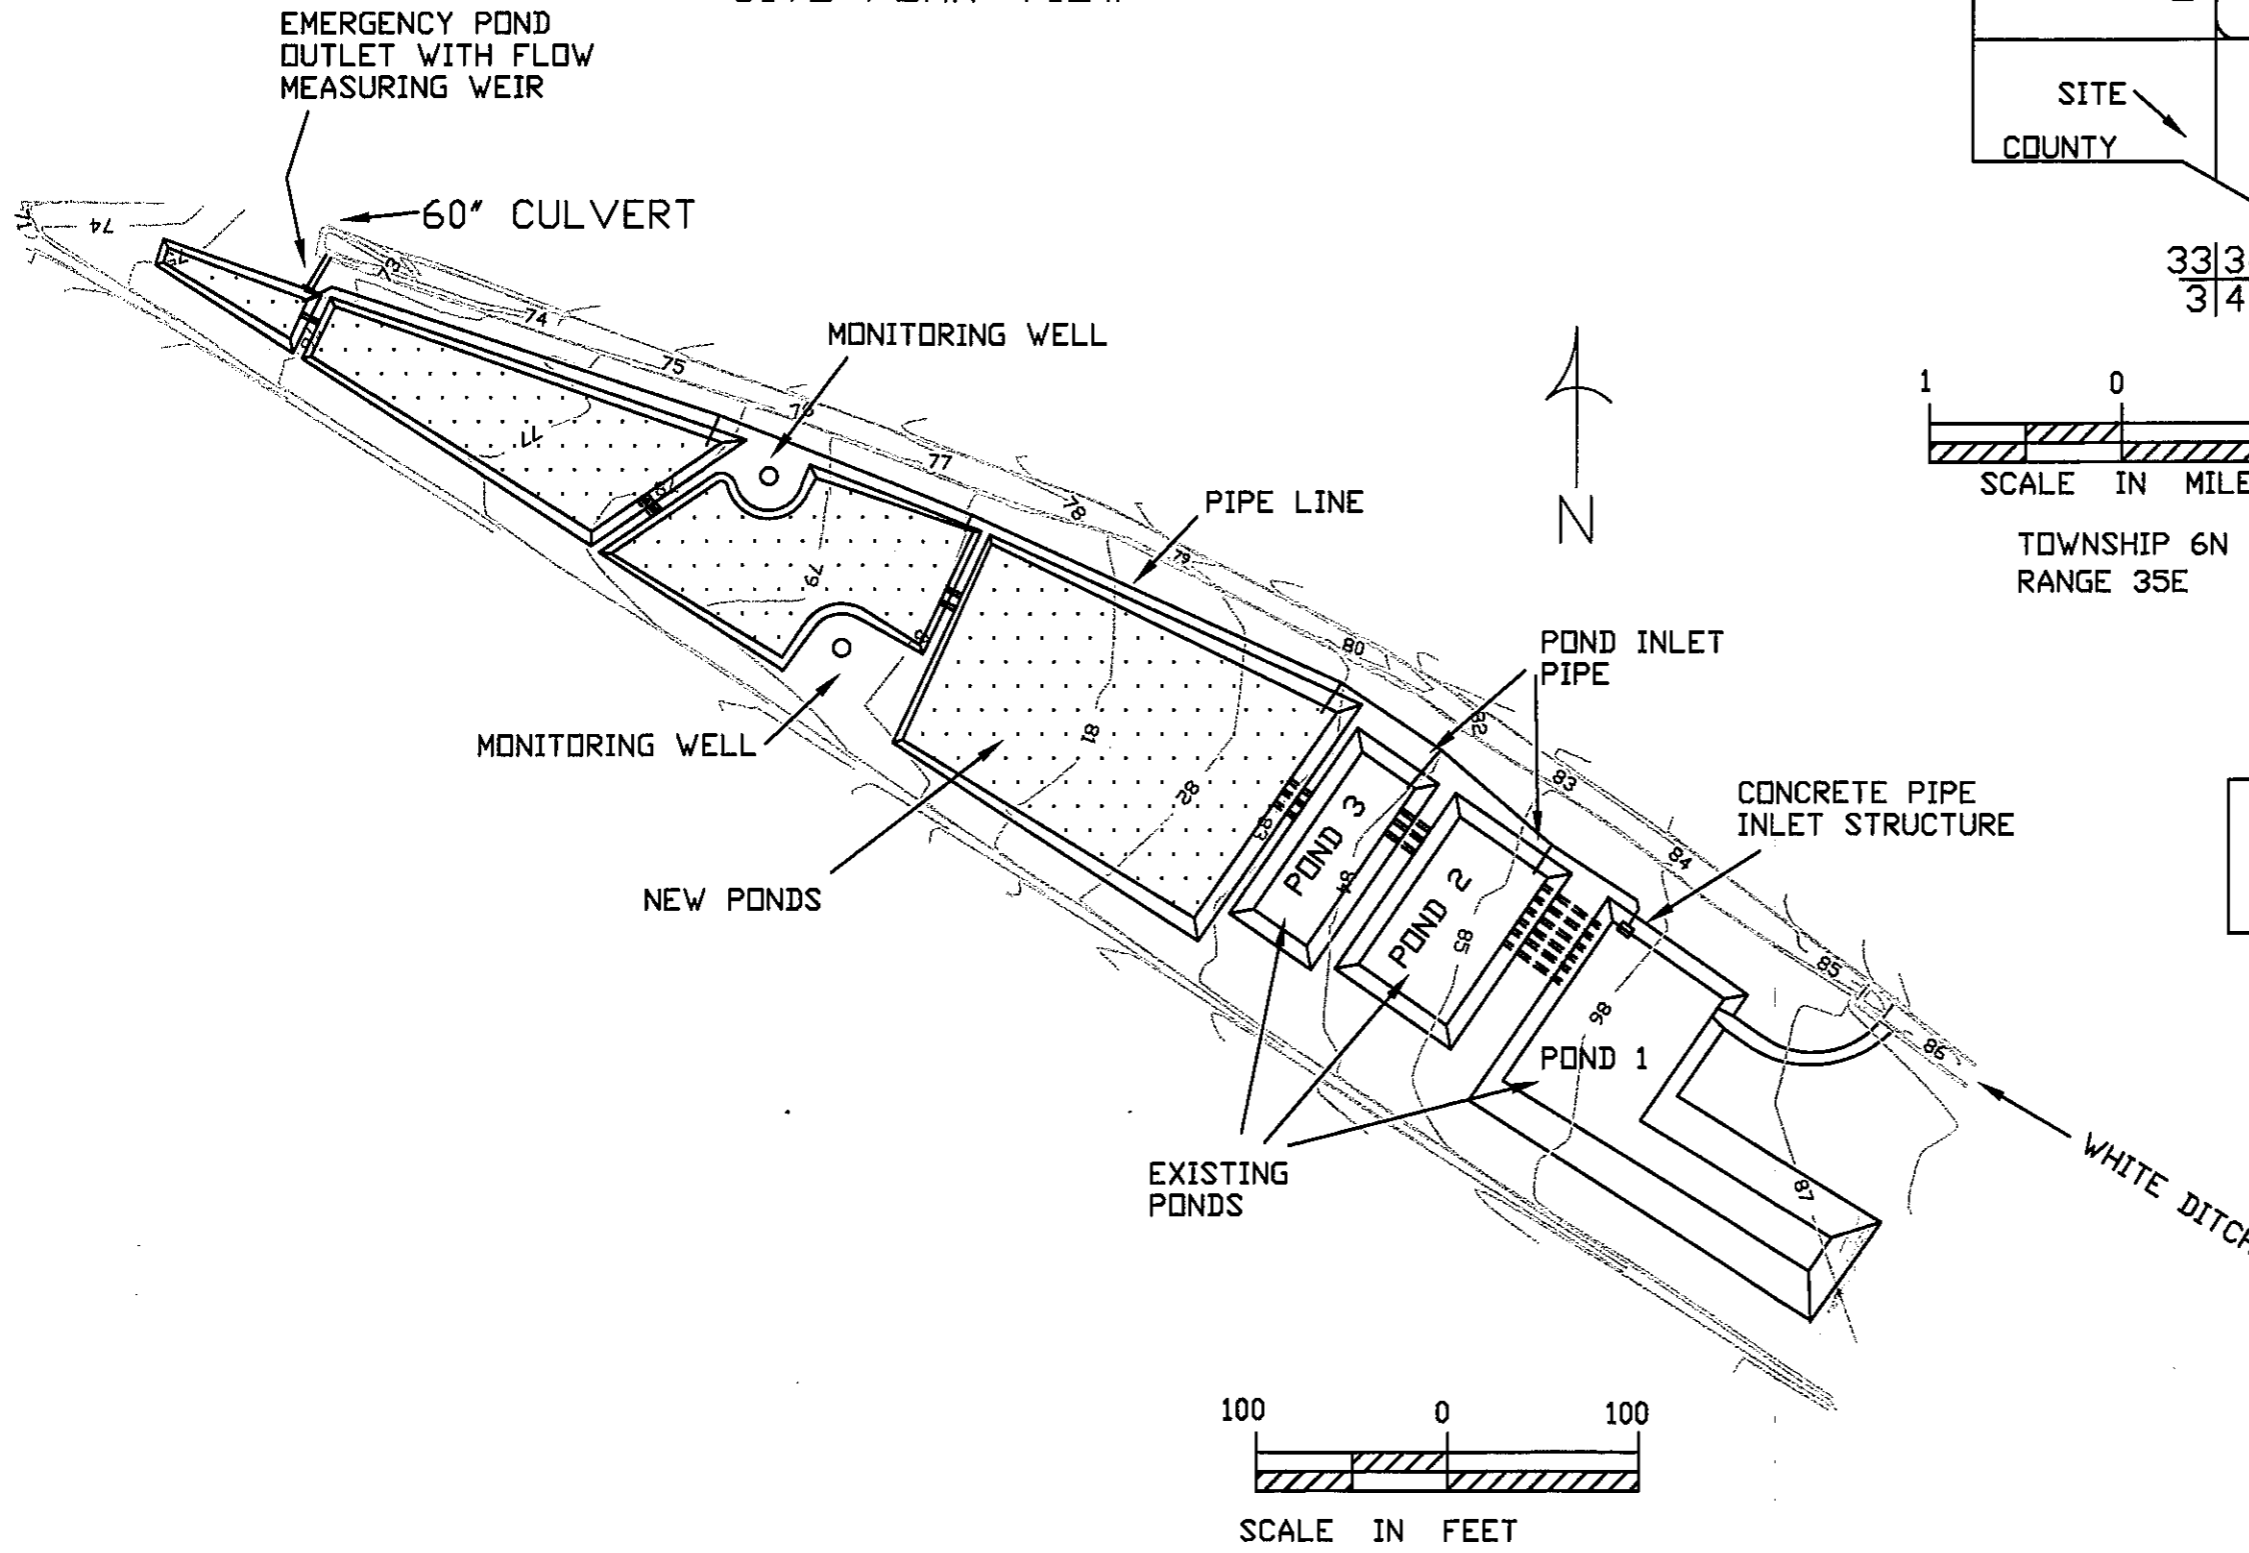

PRELIMINARY SUBJECT TO REVISION

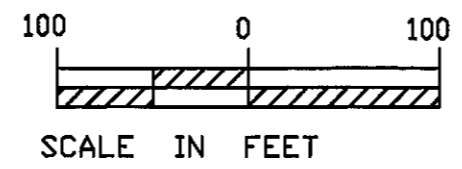

EXPIRES 6/30/2011



|          |          |
|----------|----------|
| DATE     | 9/09     |
| DESIGNED | B. HEWES |
| CHECKED  |          |
| APPROVED |          |

WWBWC/HBDIC LOWER RECHARGE PROJECT  
 LOCATION MAP & SITE MAP  
 UMATILLA COUNTY, OREGON  
 B H ENGINEERING

CAD FILE whitelowext



SHEET 1 OF 4

PIPE INLET STRUCTURE  
PERSPECTIVE VIEW  
SLIDE GATE AND TRASH RACK NOT SHOWN

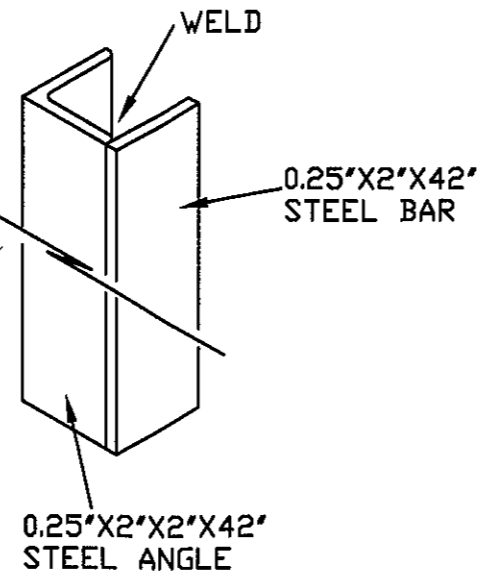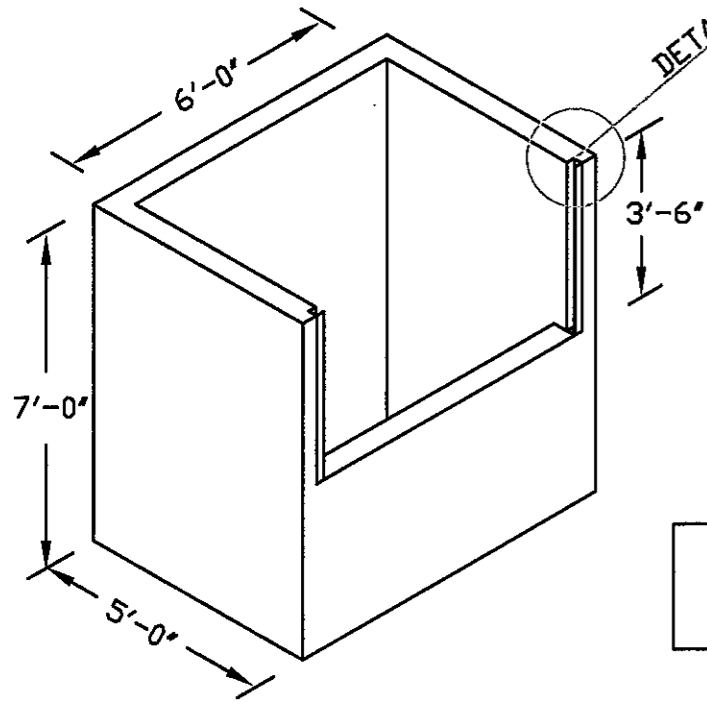


PRELIMINARY SUBJECT  
TO REVISION

REINFORCING STEEL DETAILS

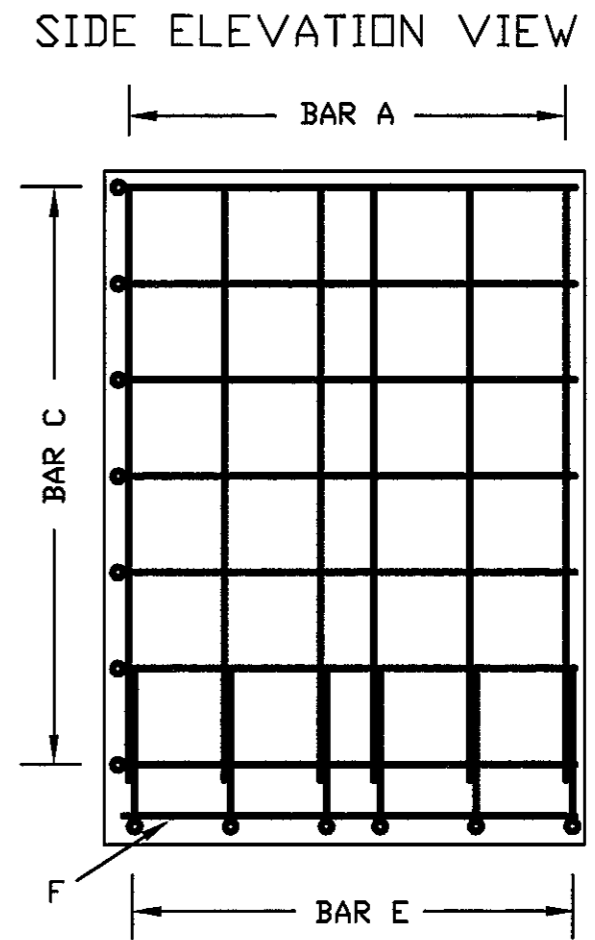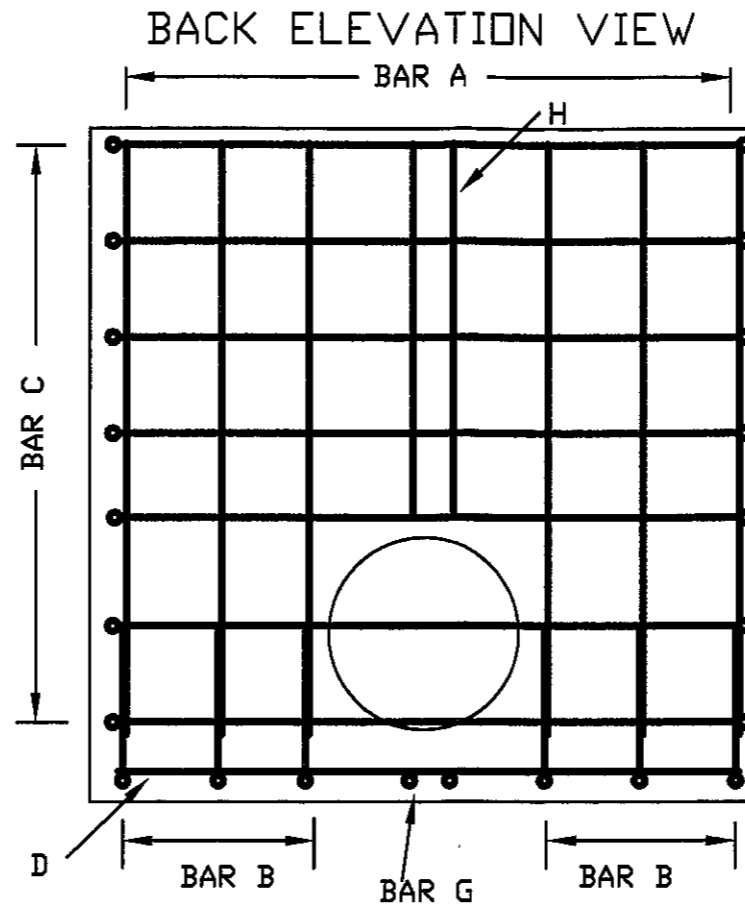


CROSS SECTION VIEW  
SLIDE GATE AND TRASH RACK NOT SHOWN

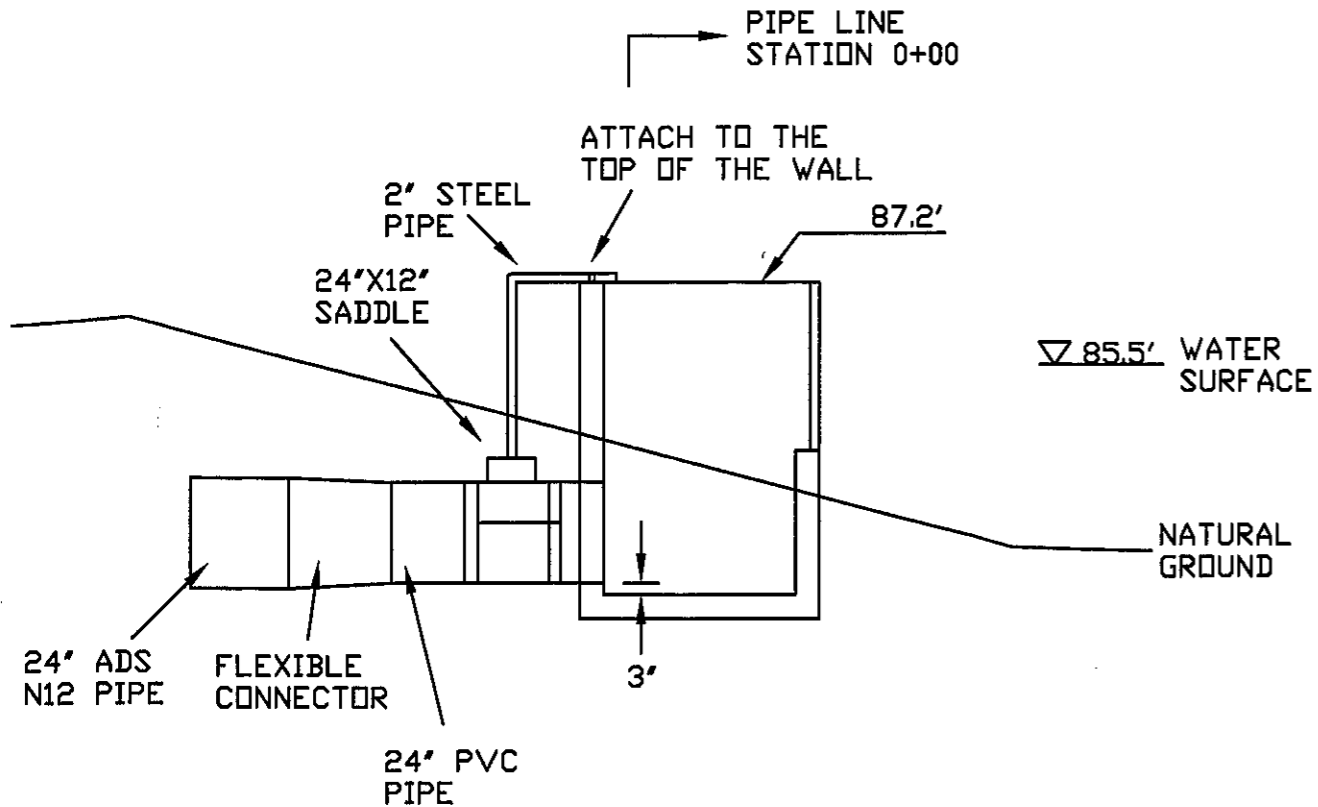

REINFORCING STEEL SCHEDULE  
ALL NUMBER 4 BARS, 12" NOMINAL SPACING

| BAR NO. | SHAPE       | A      | B     | C     |
|---------|-------------|--------|-------|-------|
| A       | 18 straight | 6'-2"  | --    | --    |
| B       | 6 A B C     | 1'-7"  | 6'-6" | 3'-1" |
| C       | 7 A B C     | 4'-7"  | 6'-6" | 4'-7" |
| D       | 2 straight  | 6'-6"  | --    | --    |
| E       | 6 A B C     | 1'-7"  | 6'-6" | 1'-7" |
| F       | 2 straight  | 4'-6"  | --    | --    |
| G       | 2 A B       | 6'-6"  | 3'-1" | --    |
| H       | 2 straight  | 3'-11" | --    | --    |

NOTES  
INSTALL THE PIPE INLET STRUCTURE ACCORDING TO CONSTRUCTION SPECIFICATION 42, REINFORCED CONCRETE FOR MINOR STRUCTURES, USE 4000 PSI STRENGTH CONCRETE, APPROXIMATELY 3.0 CU. YD. NEEDED, REINFORCING STEEL TO BE #4 BARS, NEED 400 FEET ASSUMING NO WASTE.



EXPIRES 6/30/2011

DATE 10/09  
DESIGNED B. HEWES  
CHECKED  
APPROVED

WWBWC/HBDC LOWER RECHARGE PROJECT  
PIPE INLET STRUCTURE  
UMATILLA COUNTY, OREGON  
B. H. ENGINEERING

CAD FILE  
whitelowstruc

SHEET 2  
OF 4

0+00 PIPE INLET  
 0+05 FLEXIBLE COUPLER  
 0+10-24'-45° ELBOW  
 0+15-24'-45° ELBOW

0+70-24'X24'X15' TEE  
 0+80-24'X18' REDUCER

1+50-18'X18'X12' TEE  
 1+60-18'X15' REDUCER

2+05-15'X15'X15' TEE  
 2+20-15'X12' REDUCER

4+15-12'X12'X10' TEE  
 4+20-12'X10' REDUCER

5+55-10'X10'X10' TEE  
 5+60-10'X6' REDUCER

7+65-45° ELBOW  
 7+85 END OF PIPE  
 AT POND 9

20'-15" PIPE TO POND 2

20'-12" PIPE TO POND 3

20'-15" PIPE TO POND 6




20'-10" PIPE TO POND 7

20'-10" PIPE TO POND 8

NOTES

PIPE NEEDS:  
 5'-24" CLASS 80 PVC PIPE  
 80'-24" ADS N12 CORRUGATED POLYETHYLENE PIPE  
 80'-18" "  
 60'-15" "  
 200'-12" "  
 140'-10" "  
 220'-6" "

PRELIMINARY SUBJECT  
 TO REVISION




EXPIRES 6/30/2011


DATE \_\_\_\_\_  
 DESIGNED B. HEWES  
 PLOTTED \_\_\_\_\_  
 APPROVED \_\_\_\_\_

WUBWC/HBDC RECHARGE PROJECT  
 POND SUPPLY PIPE PLAN & PROFILE  
 UMATILLA COUNTY, OREGON


CAD FILE  
 whitelowpipe  
 SHEET 3  
 OF 4

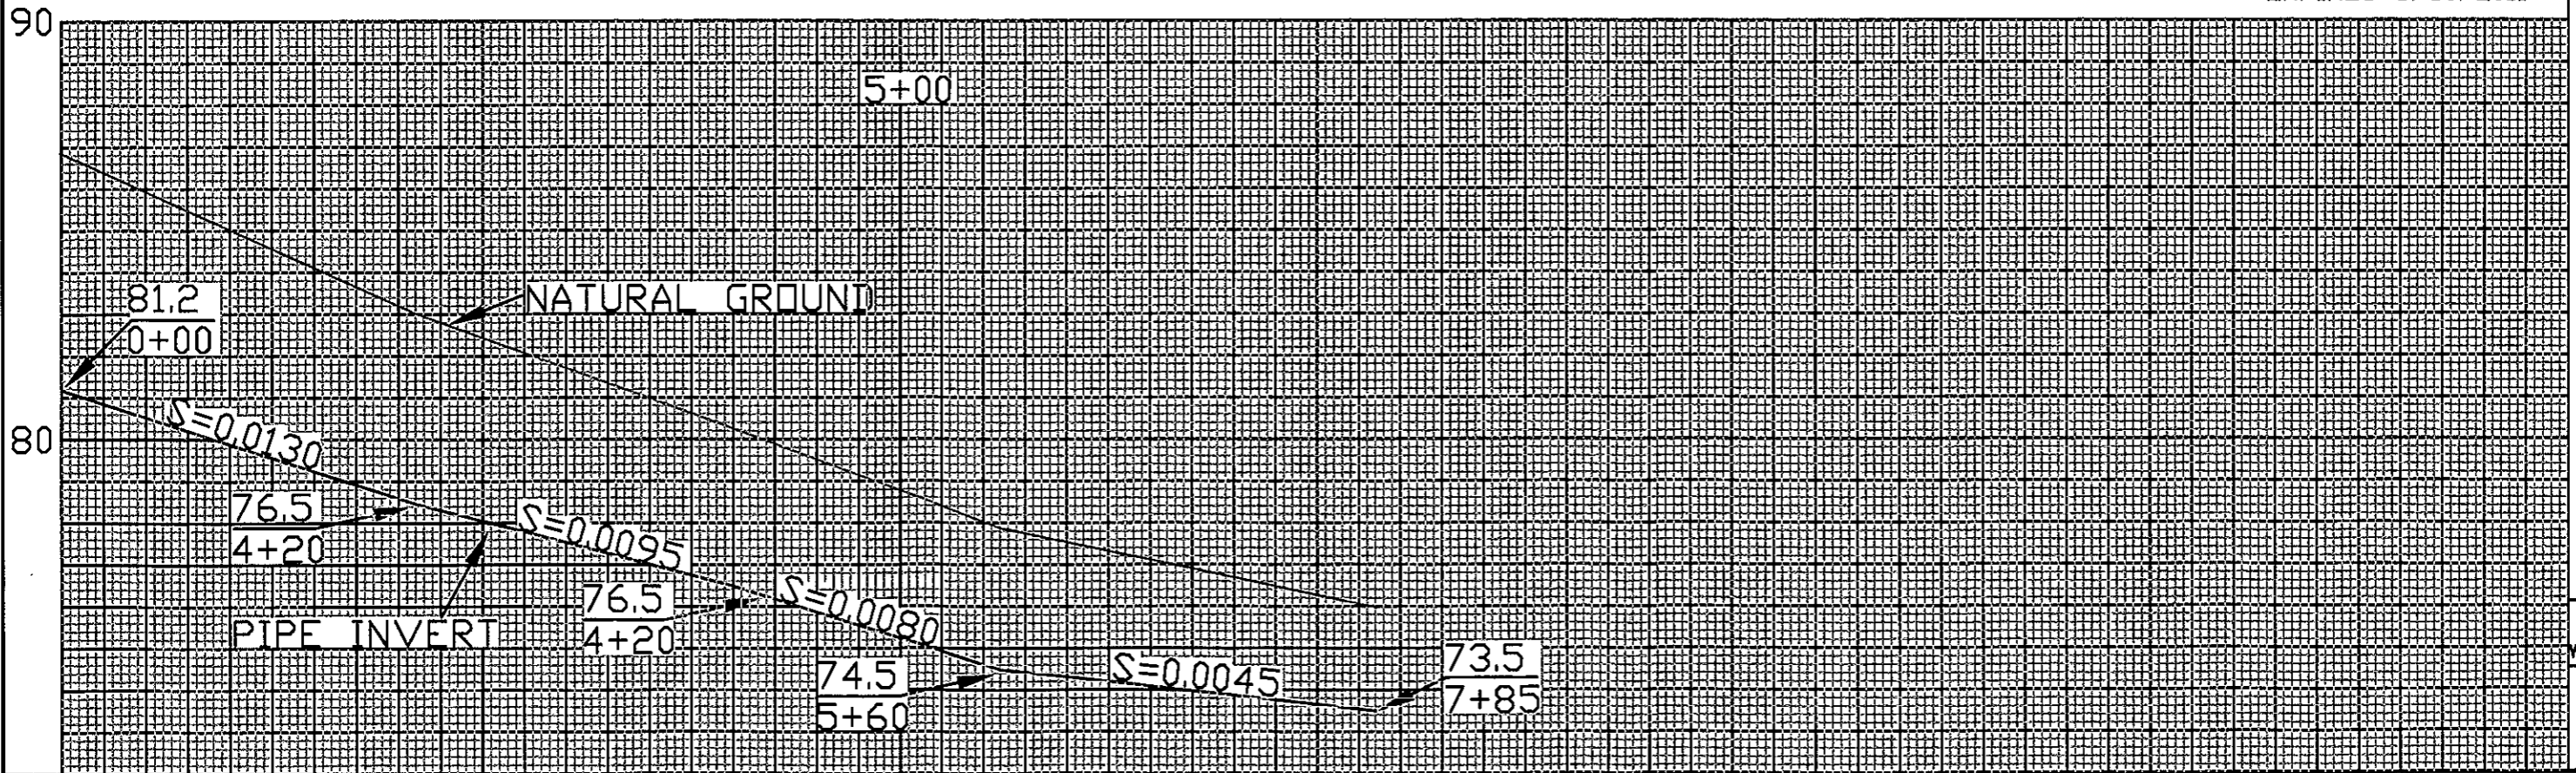

POND EMERGENCY OUTLET  
PLAN VIEW

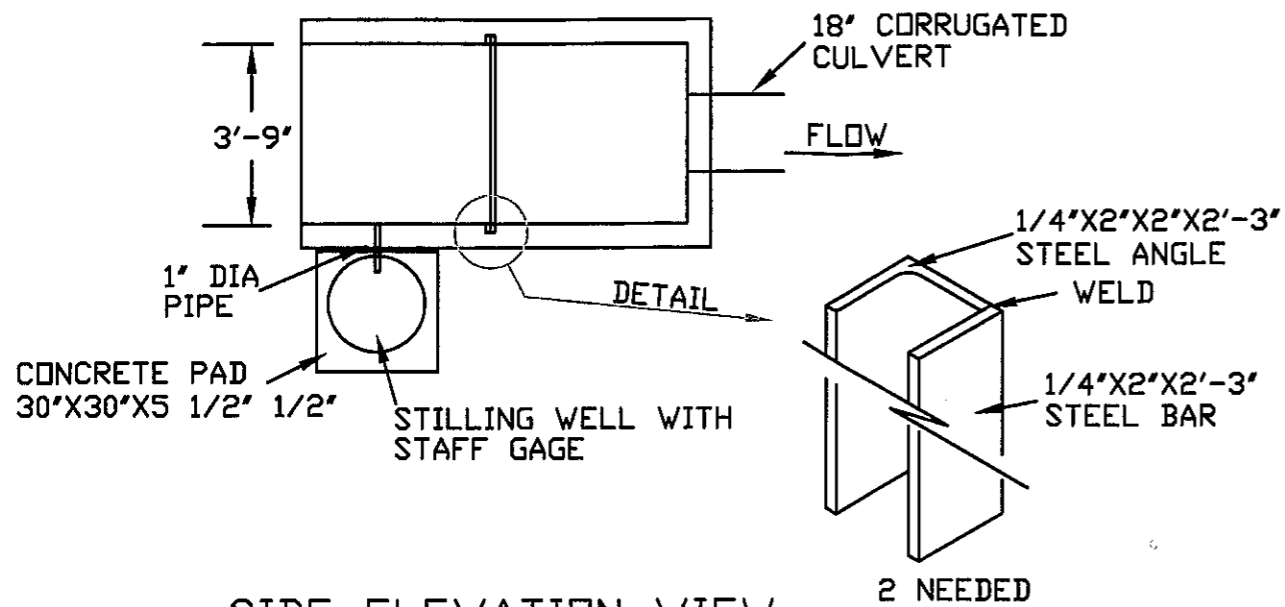

SIDE ELEVATION VIEW  
STILLING WELL NOT SHOWN

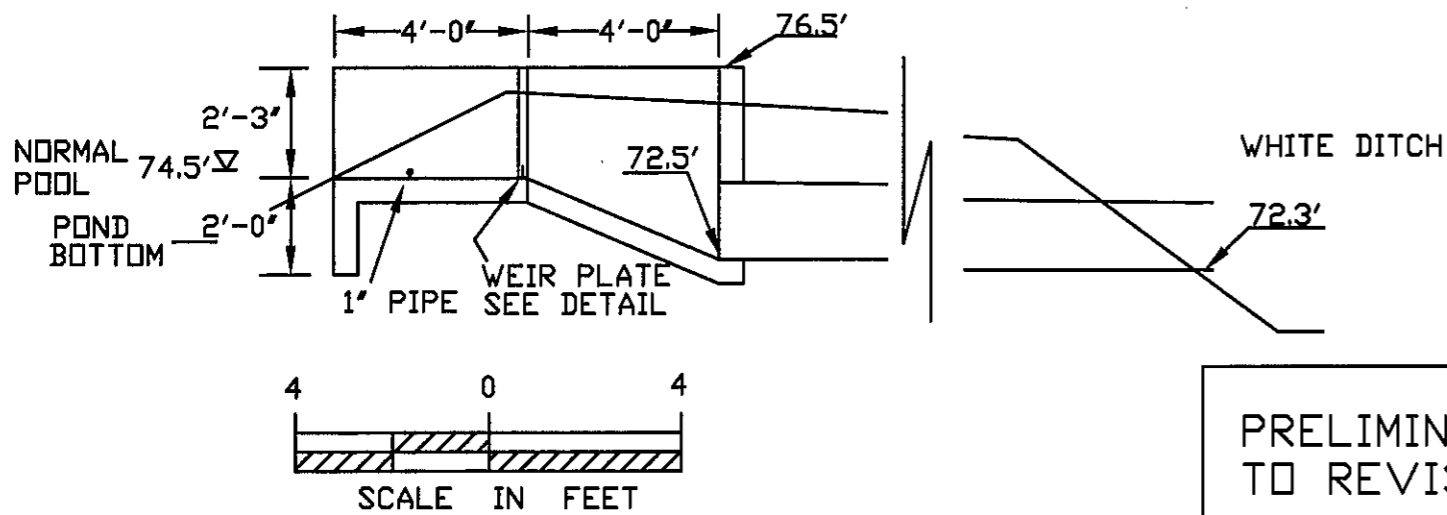


PRELIMINARY SUBJECT  
TO REVISION


NOTES

INSTALL CONCRETE IN ACCORDANCE WITH CONSTRUCTION SPECIFICATION 42, 'REINFORCED CONCRETE FOR MINOR STRUCTURES'. USE 4000 PSI STRENGTH CONCRETE, NEED ABOUT 2.2 CU. YD.  
REINFORCING STEEL ALL #4 BARS, NEED 260 FEET WITH NO WASTE.  
CULVERT PIPE MAY BE STEEL OR HIGH DENSITY POLYETHYLENE.  
SET THE WEIR PLATE IN A RABBET CUT INTO A 1 1/2' X 1 3/4' BOARD AND SET INTO THE SOCKETS. THE WEIR PLATE TO BE STEEL 1/8' X 3' X 48'.  
SET THE STILLING WELL AT LEAST 2' INTO THE CONCRETE BASE. USE A MINIMUM PIPE DIAMETER OF 18" EITHER PVC OR STEEL.  
SET THE STAFF GAGE ZERO POINT IN THE STILLING WELL LEVEL WITH THE CREST OF THE WEIR PLATE. INSTALL THE 1' PIPE TO THE STILLING WELL WITH 1' BETWEEN THE FLOOR AND PIPE.

REINFORCING STEEL DETAILS  
SIDE ELEVATION VIEW

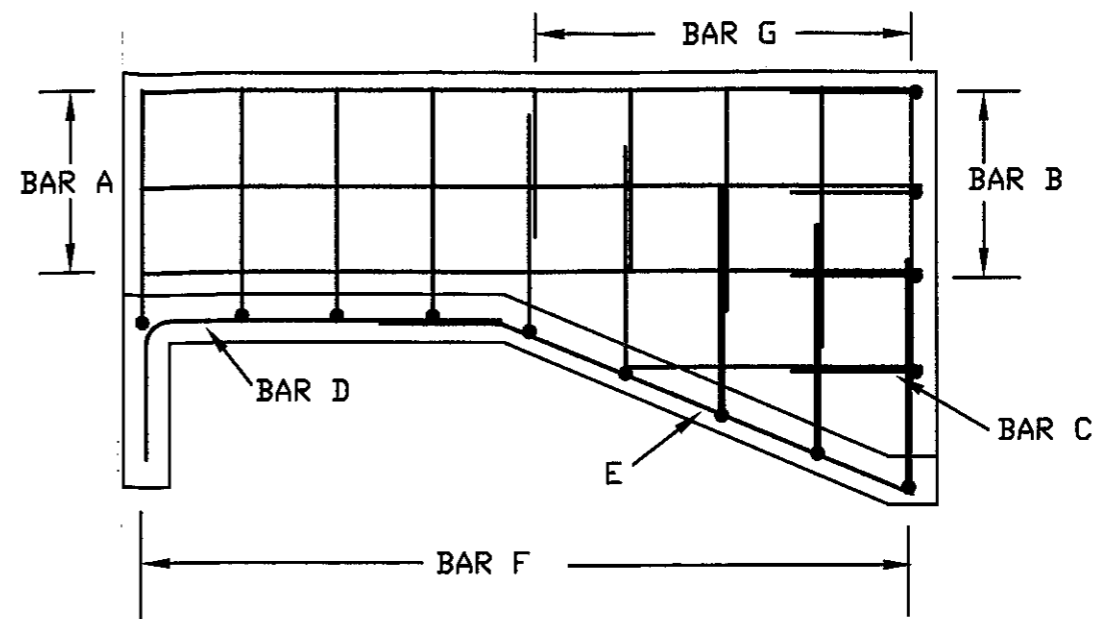


PIPE INLET END  
ELEVATION VIEW

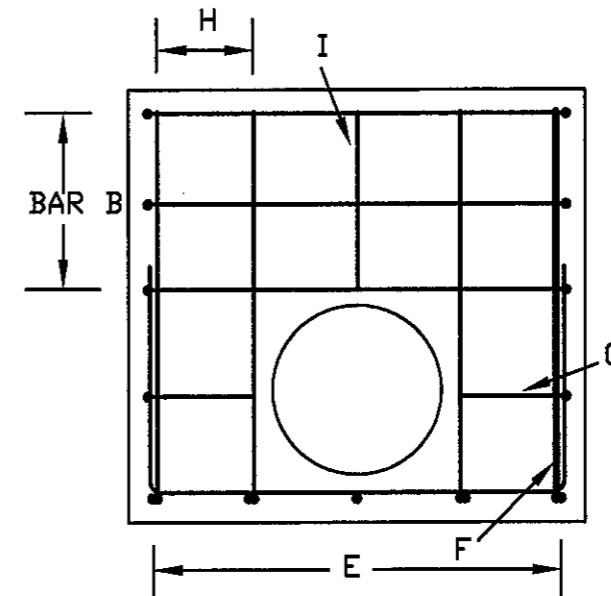

REINFORCING STEEL SCHEDULE

ALL #4 BARS, 12" NOMINAL SPACING

| BAR NO. | SHAPE       | A      | B     | C     |
|---------|-------------|--------|-------|-------|
| A       | 6 straight  | 7'-8"  | --    | --    |
| B       | 3 AL B C    | 1'-3"  | 4'-3" | 1'-3" |
| C       | 2 AL B      | 1'-3"  | 1'-1" | --    |
| D       | 5 AL B      | 1'-6"  | 4'-0" | --    |
| E       | 5 A B       | 1'-3"  | 4'-8" | --    |
| F       | 9 AL B C    | 2'-4"  | 4'-3" | 2'-4" |
| G       | 10 straight | varies | --    | --    |
| H       | 4 AL B      | 1'-3"  | 4'-1" | --    |
| I       | 1 straight  | 1'-10" | --    | --    |




EXPIRES 6/30/2011

DATE 10/09  
DESIGNED B. HEWES  
CHECKED  
APPROVED


WBWC/HBDC LOWER RECHARGE PROJECT  
EMERGENCY SPILLWAY WEIR  
UMATILLA COUNTY, OREGON  
B H ENGINEERING

CAD FILE whiteloweir  
SHEET 4 OF 4




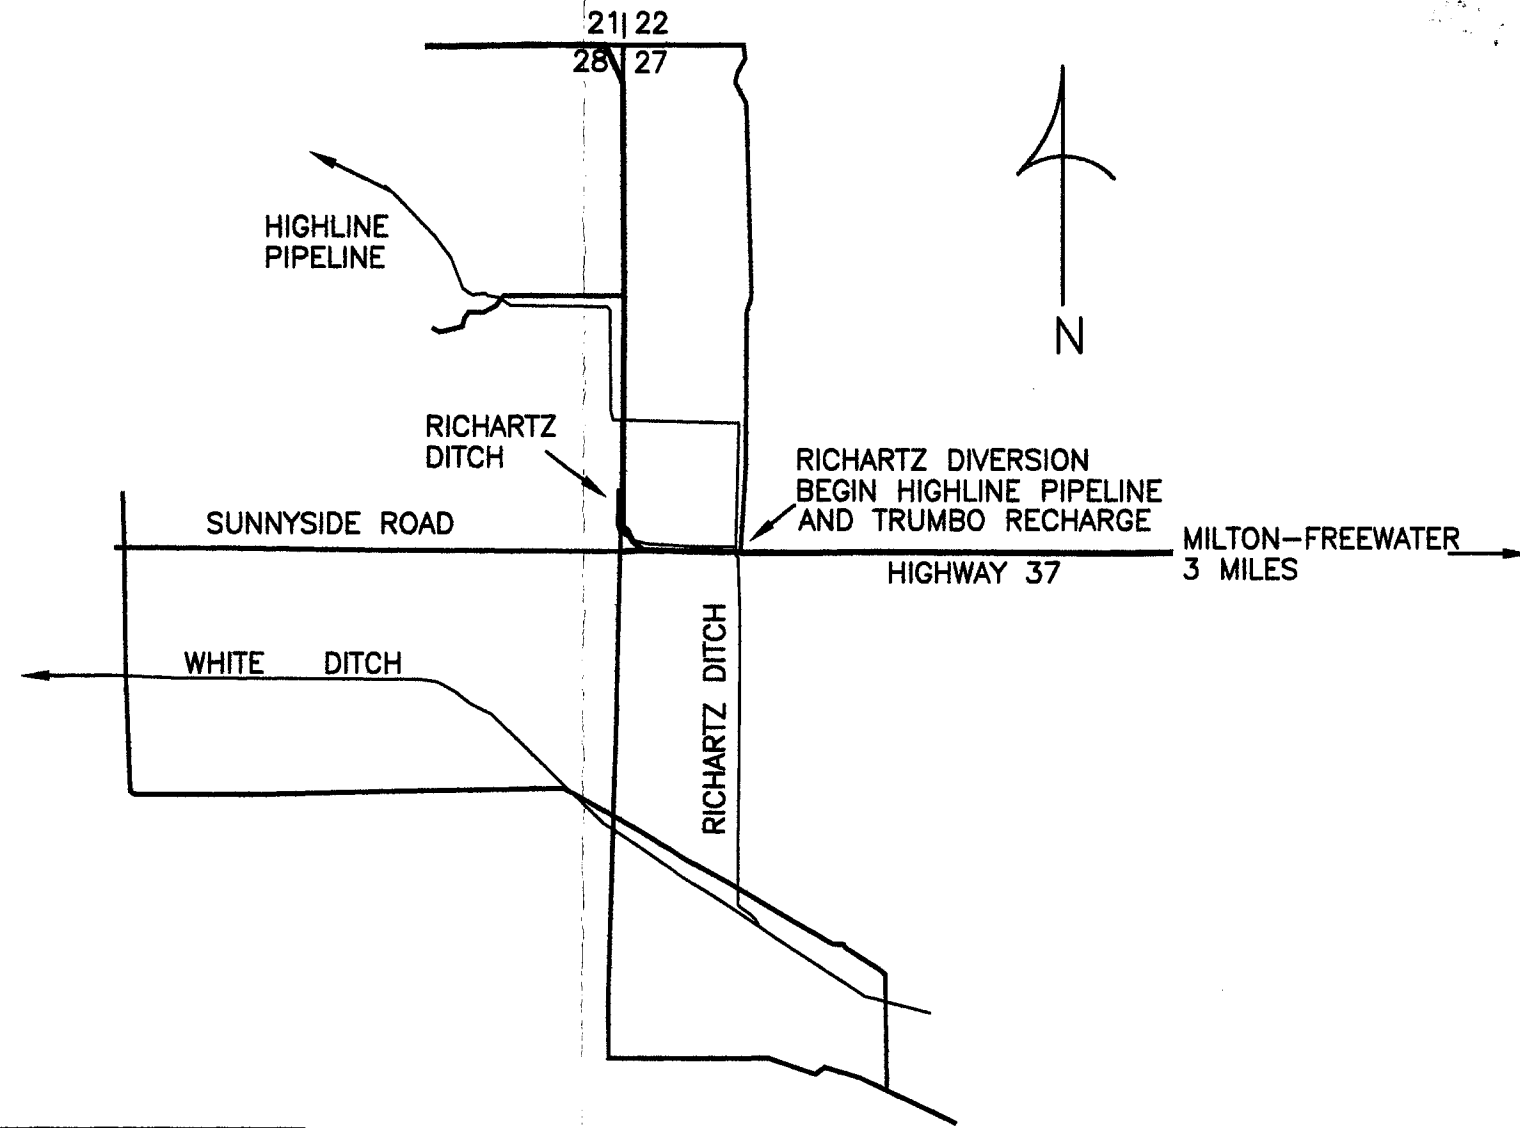

PRELIMINARY SUBJECT  
TO REVISION



SECTION 27  
TOWNSHIP 6N  
RANGE 35E



EXPIRES 6/30/2013


Bernard Hewes, BNS/4/2012 3-18 P:\trumboloc.dwg

|          |          |      |      |
|----------|----------|------|------|
| DESIGNED | B. HEWES | DATE | 9/12 |
| CHECKED  |          |      |      |
| APPROVED |          |      |      |

**WWBWC/HBDC TRUMBO LANE RECHARGE**  
**LOCATION MAP**  
**UMATILLA COUNTY, OREGON**  
**B H ENGINEERING**

|                      |
|----------------------|
| CADFILE<br>trumboloc |
| SHEET 1<br>OF 2      |


# RECHARGE SYSTEM PLAN VIEW

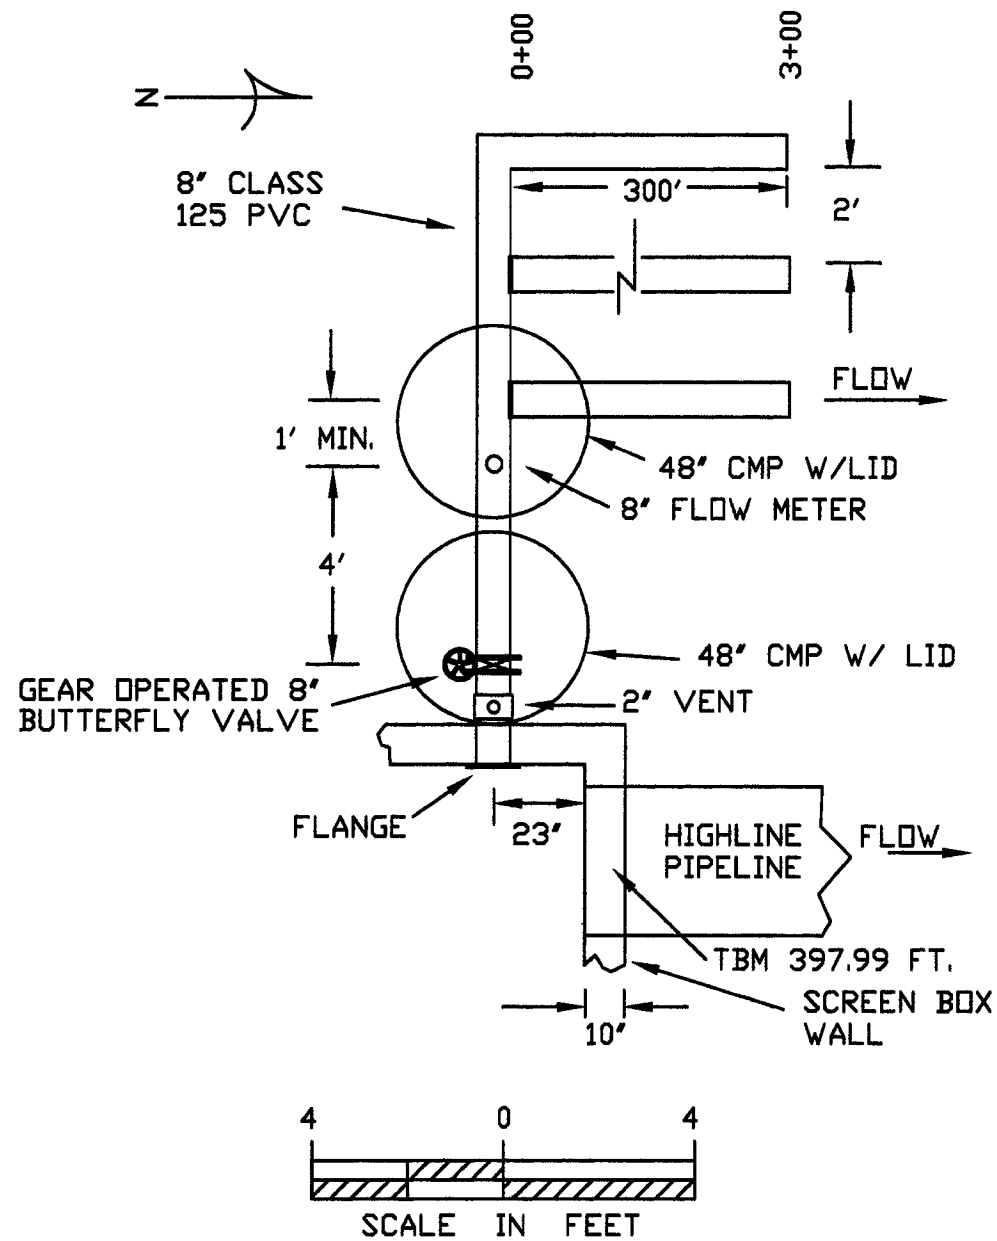


### NOTES

BOTTOM OF THE HOLE FOR THE 8" OUTLET PIPE IS 20" ABOVE THE FLOOR AND 23" FROM THE INSIDE OF THE NORTH WALL. MINIMUM DIAMETER OF THE HOLE IS 10". PLACE CAULK BETWEEN THE FLANGE AND THE WALL WHEN SETTING THE 8" PIPE. FORCE NON-SHRINK GROUT BETWEEN THE PIPE AND HOLE WALL. AFTER THE GROUT IS SET CLEAN UP ANY VOIDS WITH CAULKING COMPOUND. THE 8" RECHARGE PIPE CAN BE EITHER CORRUGATED ABS PERFORATED DRAIN PIPE OR SMOOTH WALL LEACH FIELD PIPE. INSTALL A WYE NEAR 0+00 AND 2+00 ON EACH LINE FOR A CLEAN OUT. PLACE A REMOVABLE CAP ON THE END OF EACH DRAIN LINE FOR CLEANING OUT.


# DRAIN PIPE CROSS SECTION ELEVATION VIEW

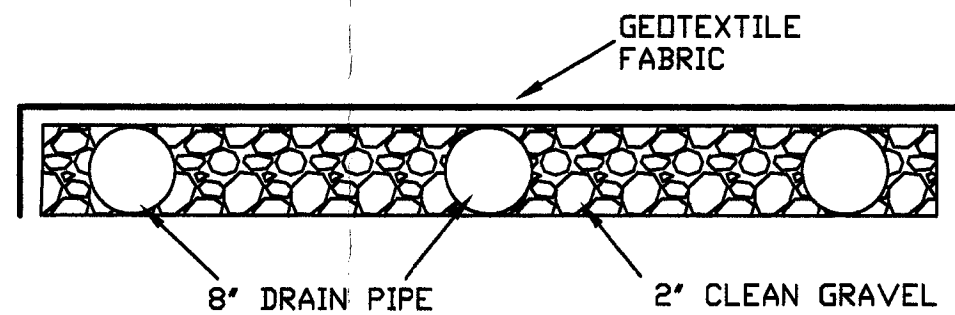

PRELIMINARY SUBJECT TO REVISION



EXPIRES 6/30/2013

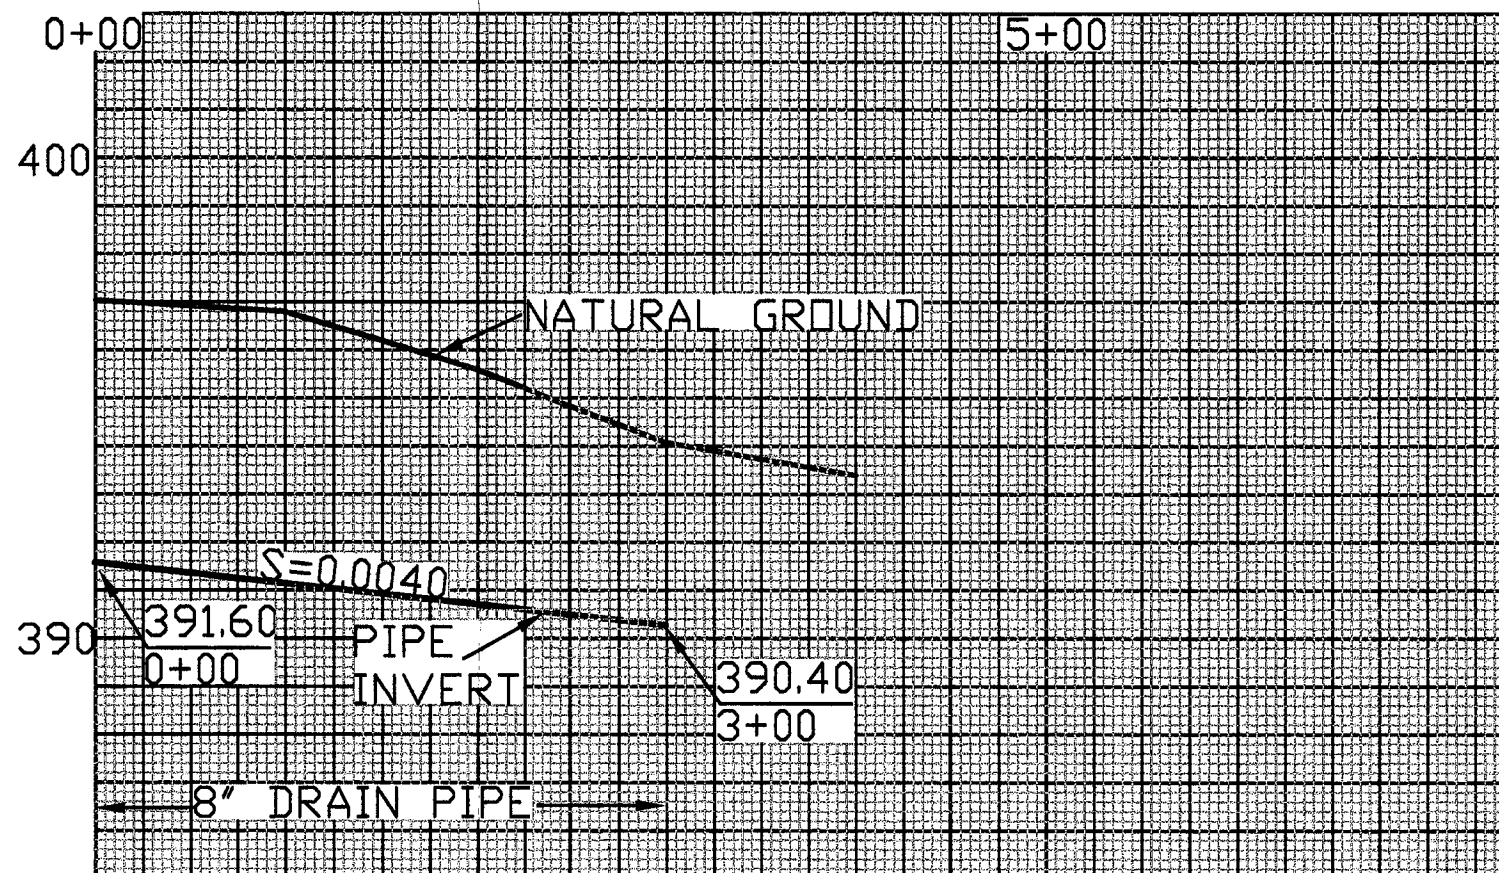

DATE 9/12  
DESIGNED BY HEVES  
PLOTTED  
APPROVED

WUBWC/HBDC TRUMB LANE RECHARGE  
PLAN & PROFILE  
MATIUA COUNTY OREGON

CAD FILE trumbopla  
SHEET 2 OF 2

orchard access road

160' est

4" inspection port

pipes about 5.5 feet deep

200'

Flush Pit

2-4X4 tees  
3-6X4 tees  
5-8X4 tees

18"

4" IPS Pipe

0.5% down slope

4" perf drain pipe,  
2 feet apart

4" flush valve

drain pipe fittings

82' est.

0.75% down slope

8"

CONSTRUCTION NOTES:

1. IPS PVC pipe and fittings are used to feed the gallery. The drain pipes and tees at the end are sewer fittings. At the flush valves the pipe is converted back to IPS PVC.

2. Gallery pipe is 4", JM Eagle PVC ASTM D2729 solvent weld drain pipe. Perforations for pipe are two rows of holes 1/2" in diameter on 5" centers and 120 degree angle apart.

3. Place each pipe 2 feet apart on center and with the holes up.

4. Screen box is 3 feet wide, 6 feet long and 1 foot deep per CTC drawing attached.

5. Flush pit is earthen and deep enough so that the flush pipe daylights in the pit. Sediment accumulated in the flush pit can be removed using a front end bucket. Initial flushing is suggested at startup, middle and end of infiltration season.

6. Buried PVC pipe needs to be bedded with gravel or soils with no rocks larger than 2 inches.

7. Position screen box so that air vent is on north side of access drive.

top of pipe about 3' deep

gravel access road

air vent/vac  
flow meter

8" valve

screen box

ditch

ditch

pump

PLAN VIEW

not to scale



FOR REVIEW

DATE  
8/12  
9/12

DESIGN  
jaf

DRAWN  
jaf

CHECKED

APPROVED

TITLE

File: InfGalleries.dwg  
FAZIO ENGINEERING  
P.O. BOX 246  
MILTON-FREEWATER, OR 98762  
(541) 938-6084

SITE LAYOUT  
Anspach Recharge  
MILTON-FREEWATER, OR


SHEET  
1 OF 2

**CONSTRUCTION NOTES:**

1. The gallery requires 2,000 feet of drian pipe as noted. Cover drain pipe about 2" with gravel, with drain holes up.


2. Proposed gravel material is 1-1/2" to 3/4" "Switch Yard", Koncrete Industries, or similar angular crushed rock with minimal fines. About 272 yards needed assuming 24' X 204' X 1.5' volume.

3. Filter fabric is a nonwoven geotextile, Mirafi MSCAPE or equivalent. About 544 square yards required, assume 24' X 204'.

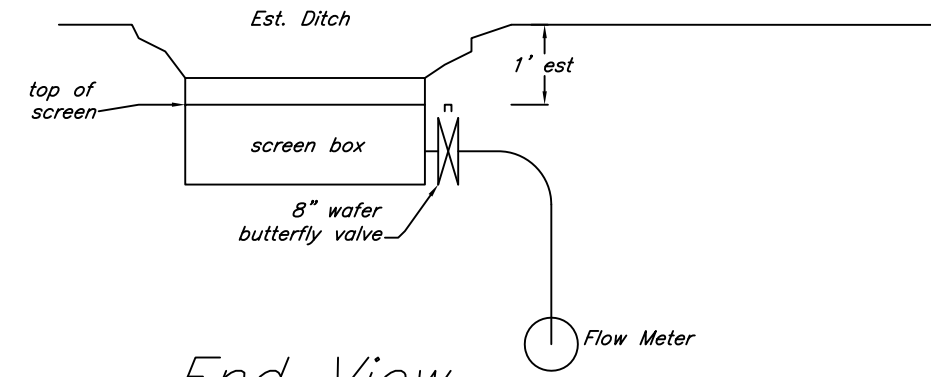


End View

Screen Box Area Details

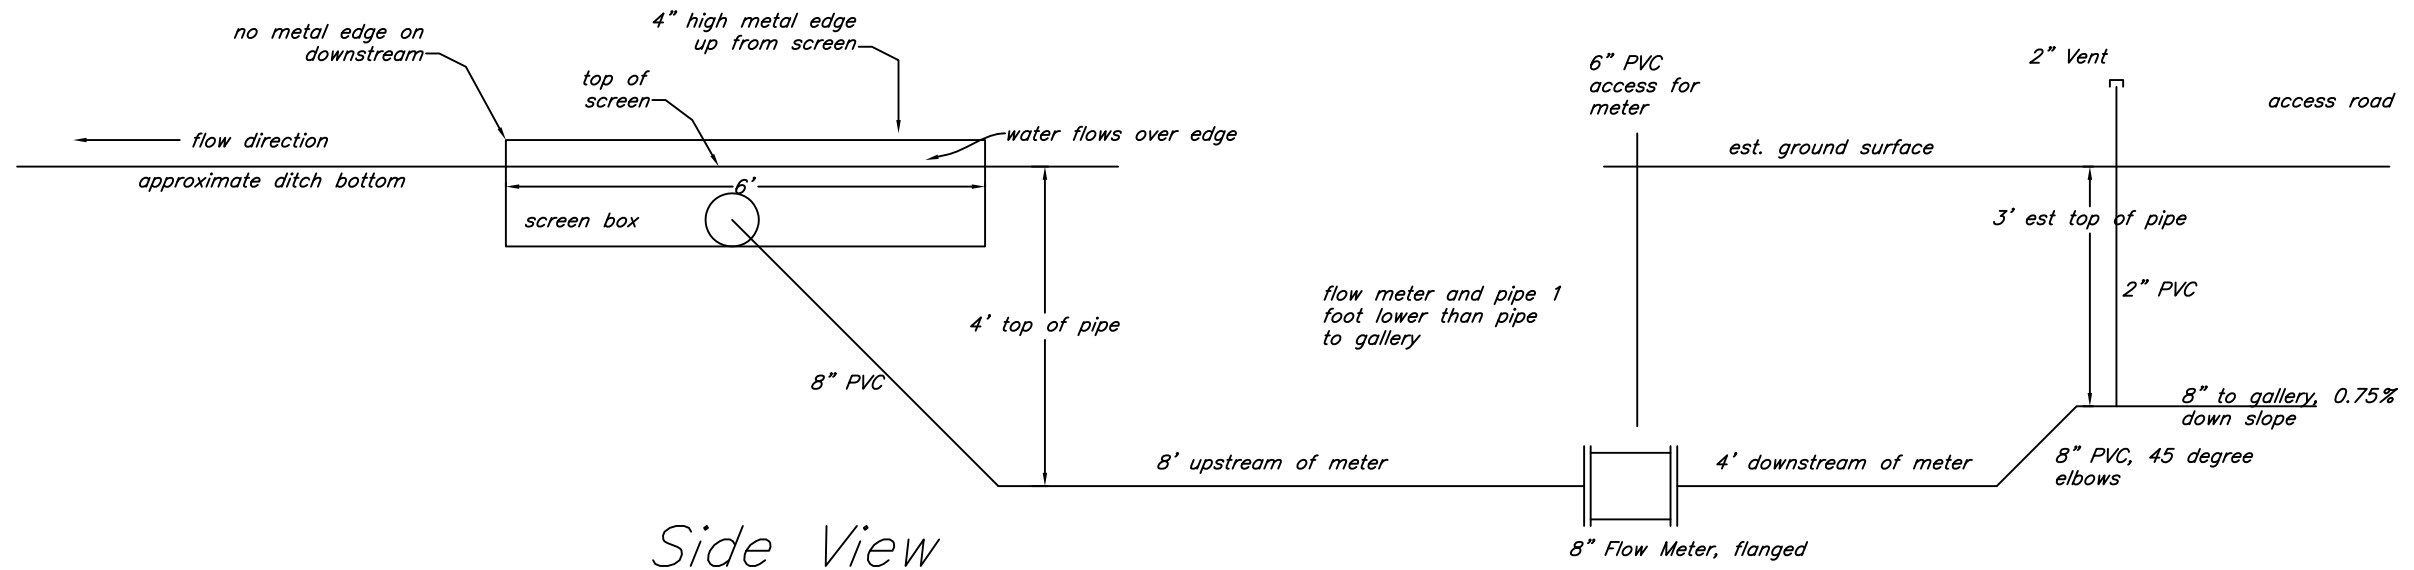

Side View

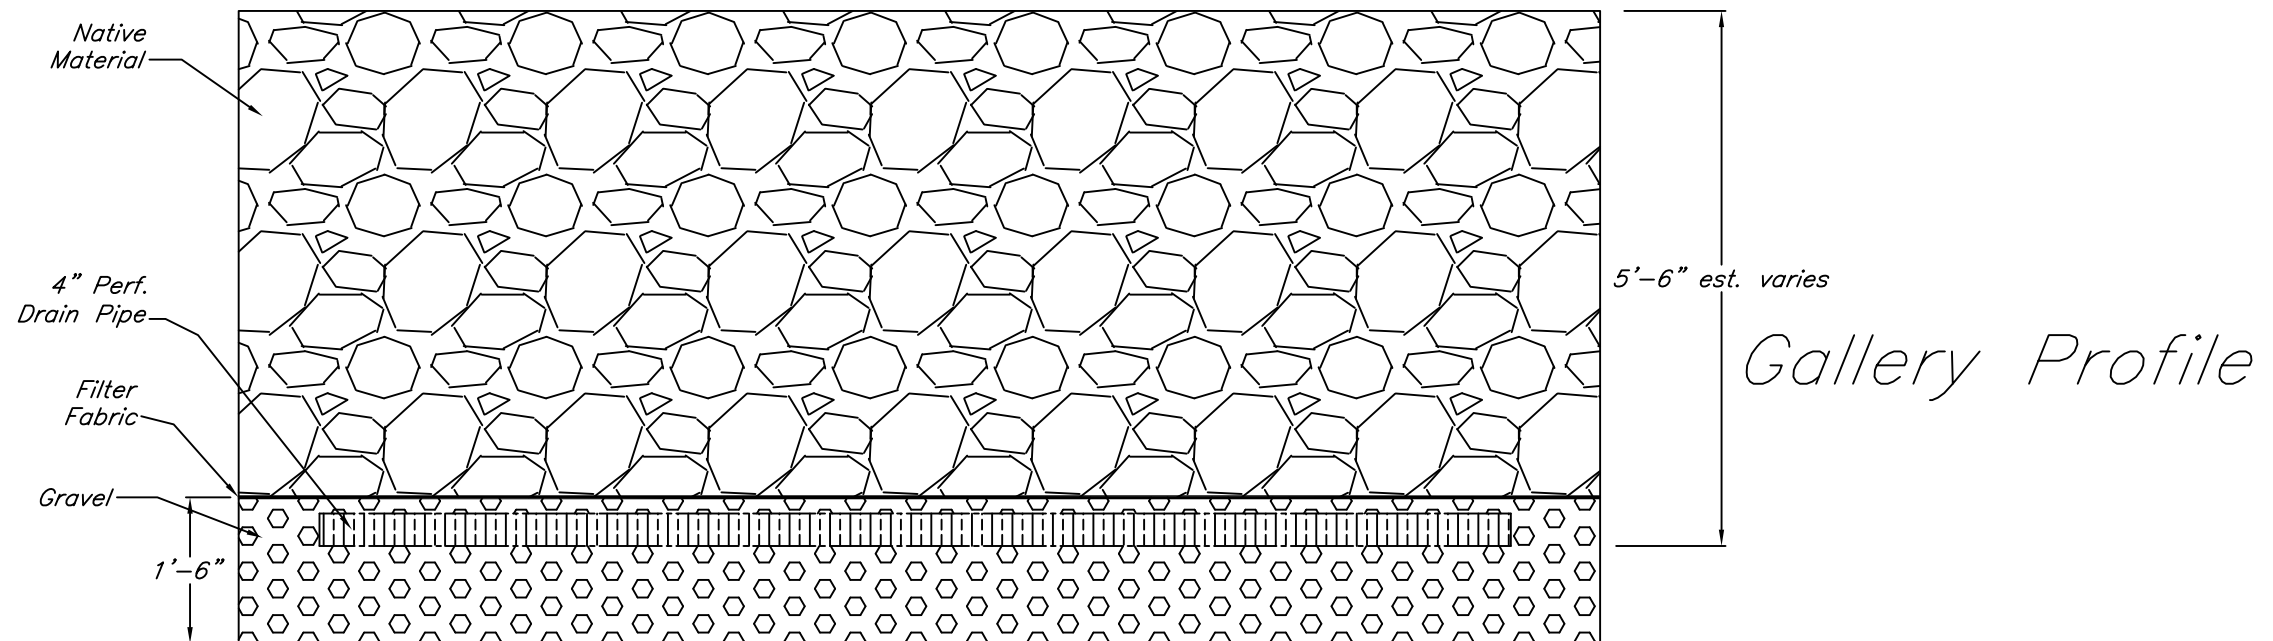

Gallery Profile

FOR REVIEW

|   |      |      |
|---|------|------|
| DATE  | 8/12 | 9/12 |
| DESIGN  | jaf  | jaf  |
| DRAWN   | jaf  |      |
| CHECKED   |      |      |
| APPROVED  |      |      |
| TITLE   |      |      |
| File: InfGalleries.dwg  |      |      |
| Fazio Engineering<br>P.O. Box 246<br>Milton-Freewater, OR 98762<br>(541) 938-6084 |      |      |
| DETAILS<br>Anspach Recharge<br>Milton-Freewater, OR                               |      |      |
| SHEET   | 2    | 2    |



PROJECT JOHN FAZIO

SHT 1 OF 1



SCREEN BOX

DATE 4 SEPT 12

BY

B. B. B.

JOB NO. 2

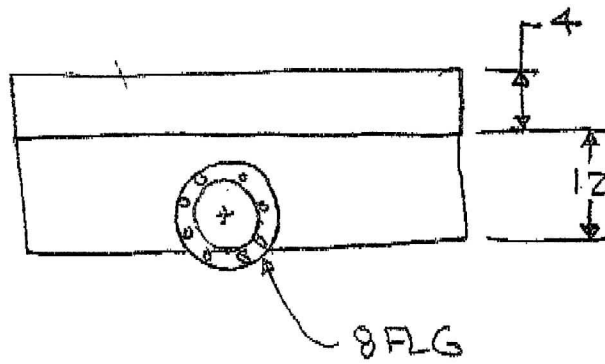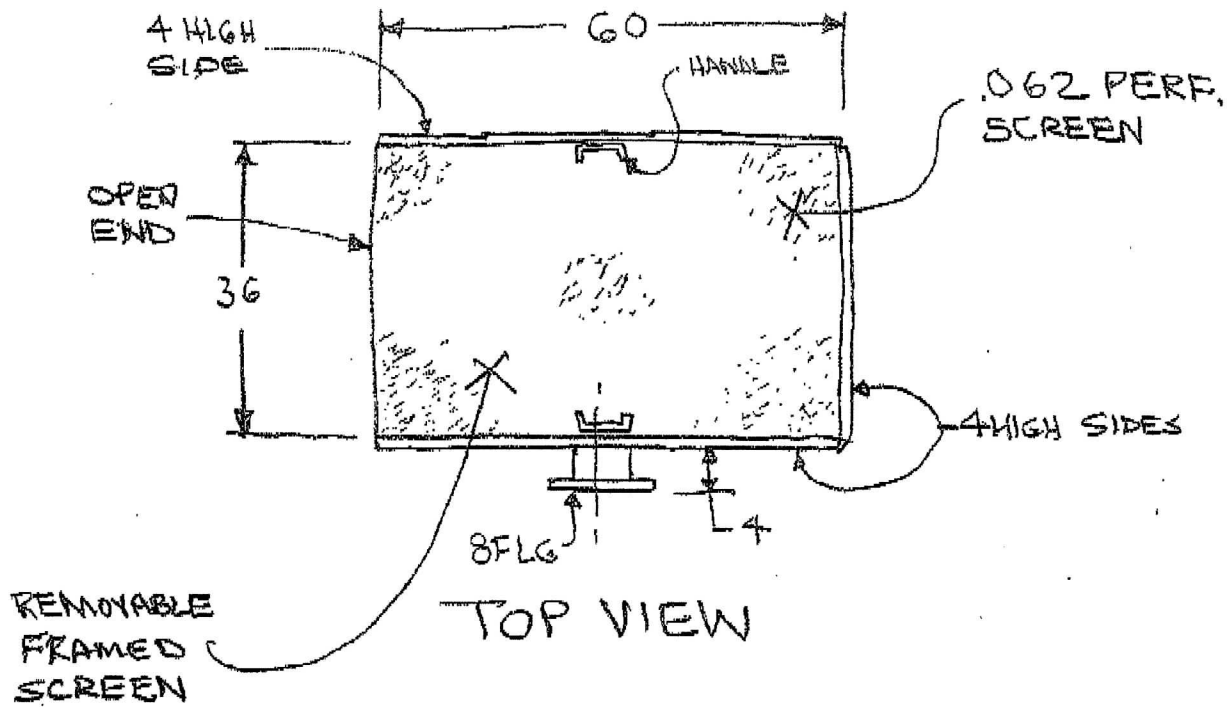

SIDE VIEW

## **APPENDIX E – WATER QUALITY RESULTS**

---

# Water Analysis Report



714 So. College Avenue  
 College Place, WA 99324  
 Email : info@wallawatr.com

Phone: 509-526-9287  
 Fax: 509-526-5272

|                                       |                                      |
|---------------------------------------|--------------------------------------|
| Customer Name: <u>Troy Baker</u>      | Sample Location: <u>HBDIC Intake</u> |
| Address: <u>810 S Main P.O.Box 68</u> | Date Sampled: <u>12/17/2012</u>      |
| City: <u>Milton Freewater</u>         | Sampled By: <u>Troy Baker</u>        |
| State: <u>OR</u> Zip: <u>97862</u>    | Lab #: <u>209-02160</u>              |

All samples were analyzed within accepted holding times, were appropriately preserved and were analyzed according to approved analytical protocols. The quality control data was within laboratory acceptance limits.

| Analytes                | Results | Units          | SRL  | Trigger                              | MCL | Lab | Method       | Analyzed |
|-------------------------|---------|----------------|------|--------------------------------------|-----|-----|--------------|----------|
| pH                      | 7.21    |                |      |                                      |     | cs  | SM-4500 H+   | 12/17/12 |
| Conductivity            | 17.81   | µohms/cm       | 10   | 700                                  | 700 | cs  | SM-2510      | 12/17/12 |
| Nitrates                | < 0.5   | mg/L           | 0.50 | 5                                    | 10  | cs  | SM-4500 D    | 12/17/12 |
| Total Dissolved Solids  | 8.00    | mg/L           |      |                                      |     | cs  | SM-2520 Calc | 12/17/12 |
| Chloride                | ND      | mg/L           | 10   | 250                                  | 250 | cl  | SM-4500 Cl B | 12/18/12 |
| Orthophosphate          | ND      | mg/L           | 20   |                                      |     | cl  | SM-4500 P E  | 12/18/12 |
| COD (Total)             | 3.00    | mg/L           |      |                                      |     | cl  | SM-5200 D    | 12/18/12 |
| Total Kjeldahl Nitrogen | ND      | mg/L           |      |                                      |     | cl  | SM-4500 Norg | 12/18/12 |
| Total Coliform          | U       | UNSATISFACTORY |      | Is E-coli Present <u>X</u> or Absent |     |     | SM-9221 D    | 12/18/12 |

ND = Non Detect

mg/L- Milligrams per Liter

Curtis W. Skifstad, Lab Director:

Date: Monday, January 14, 2013



|  |   |  |
|--|---|--|
| Burlington WA<br>Corporate Office<br>1820 S Walnut St - 98233<br>800.755.9295 • 360.757.1400 | Bellingham WA<br>Microbiology<br>805 Orchard Dr Ste 4 - 98225<br>360.671.0688 | Portland OR<br>Microbiology/Chemistry<br>9150 SW Pioneer Ct Ste W- 97070<br>503.692.7802 |
|--|---|--|

WSDOE Lab C567

## DATA REPORT

Page 1 of 1

Client Name: Walla Walla Regional Water Testing Services  
714 S College Avenue  
College Place, WA 99324

Reference Number: **12-22245**  
Project: Aquifer Recharge

Lab Number: 51043  
Field ID: Intake  
Sample Description: HBDIC —  
Matrix: Water  
Sample Date: 12/17/12  
Extraction Date: 12/31/12  
Extraction Method: 3535

Report Date: 1/9/13  
Date Analyzed: 1/8/13  
Analyst: CO  
Peer Review:  
Analytical Method: 525.2  
Batch: 525\_121231

| CAS       | Compound              | RESULT | Flag | UNITS | PQL | MRL | MDL  | D.F. | COMMENT |
|-----------|-----------------------|--------|------|-------|-----|-----|------|------|---------|
| 57837-19- | METALAXYL             | ND     |      | ug/L  | 0.1 | 0.1 | 0.1  | 1.00 |         |
| 15299-99- | NAPROPAMIDE           | ND     |      | ug/L  | 0.1 | 0.1 | 0.05 | 1.00 |         |
| 60168-88- | FENARIMOL             | ND     |      | ug/L  | 0.1 | 0.1 | 0.03 | 1.00 |         |
| 58-89-9   | LINDANE (BHC - GAMMA) | ND     |      | ug/L  | 0.1 | 0.1 | 0.03 | 1.00 |         |
| 72-54-8   | 4,4-DDD               | ND     |      | ug/L  | 0.1 | 0.1 | 0.02 | 1.00 |         |
| 72-55-9   | 4,4-DDE               | ND     |      | ug/L  | 0.1 | 0.1 | 0.02 | 1.00 |         |
| 50-29-3   | 4,4-DDT               | ND     |      | ug/L  | 0.1 | 0.1 | 0.03 | 1.00 |         |
| 88671-89- | MYCLOBUTANIL          | ND     |      | ug/L  | 0.1 | 0.1 | 0.1  | 1.00 |         |

**Notes:**

Flags are data qualifiers. If there are data qualifiers on your report definitions can be found on an accompanying sheet.

ND - indicates the compound was not detected above the PQL or MDL.

PQL = Practical Quantitation Limit is the lowest level that can be achieved within specified limits of precision and accuracy during routine laboratory operating conditions.

D.F. - Dilution Factor.

If you have any questions concerning this report contact us at the above phone number.

Form: c608.rpt



# Water Analysis Report



714 So. College Avenue  
 College Place, WA 99324  
 Email : info@wallawatr.com

Phone: 509-526-9287  
 Fax: 509-526-5272

|                                       |                                     |
|---------------------------------------|-------------------------------------|
| Customer Name: <u>Troy Baker</u>      | Sample Location: <u>HBDIC OBS 2</u> |
| Address: <u>810 S Main P.O.Box 68</u> | Date Sampled: <u>12/17/2012</u>     |
| City: <u>Milton Freewater</u>         | Sampled By: <u>Troy Baker</u>       |
| State: <u>OR</u> Zip: <u>97862</u>    | Lab #: <u>209-02161</u>             |

All samples were analyzed within accepted holding times, were appropriately preserved and were analyzed according to approved analytical protocols. The quality control data was within laboratory acceptance limits.

| Analytes                | Results | Units          | SRL  | Trigger                              | MCL | Lab | Method       | Analyzed |
|-------------------------|---------|----------------|------|--------------------------------------|-----|-----|--------------|----------|
| pH                      | 7.20    |                |      |                                      |     | cs  | SM-4500 H+   | 12/17/12 |
| Conductivity            | 18.24   | µohms/cm       | 10   | 700                                  | 700 | cs  | SM-2510      | 12/17/12 |
| Nitrates                | < 0.5   | mg/L           | 0.50 | 5                                    | 10  | cs  | SM-4500 D    | 12/17/12 |
| Total Dissolved Solids  | 8.20    | mg/L           |      |                                      |     | cs  | SM-2520 Calc | 12/17/12 |
| Chloride                | ND      | mg/L           | 10   | 250                                  | 250 | cl  | SM-4500 Cl B | 12/18/12 |
| Orthophosphate          | ND      | mg/L           | 20   |                                      |     | cl  | SM-4500 P E  | 12/18/12 |
| COD (Total)             | 2.00    | mg/L           |      |                                      |     | cl  | SM-5200 D    | 12/18/12 |
| Total Kjeldahl Nitrogen | ND      | mg/L           |      |                                      |     | cl  | SM-4500 Norg | 12/18/12 |
| Total Coliform          | U       | UNSATISFACTORY |      | Is E-coli Present <u>X</u> or Absent |     |     | SM-9221 D    | 12/18/12 |
|                         |         |                |      |                                      |     |     |              |          |

ND = Non Detect  
 mg/L= Milligrams per Liter

Curtis W. Skifstad, Lab Director:

Date: Monday, January 14, 2013



Burlington WA  
Corporate Office

Bellingham WA  
Microbiology

Portland OR  
Microbiology/Chemistry

1620 S Walnut St - 98233  
800.755.9295 • 360.757.1400

805 Orchard Dr Ste 4 - 98225  
360.671.0668

9150 SW Pioneer Ct Ste W- 97070  
503.682.7802

WSDOE Lab C567

## DATA REPORT

Page 1 of 1

Client Name: Walla Walla Regional Water Testing Services  
714 S College Avenue  
College Place, WA 99324

Reference Number: **12-22245**  
Project: Aquifer Recharge

Lab Number: 51042  
Field ID: OBS-2 —  
Sample Description: HBDIC  
Matrix: Water  
Sample Date: 12/17/12  
Extraction Date: 12/31/12  
Extraction Method: 3535

Report Date: 1/9/13  
Date Analyzed: 1/8/13  
Analyst: CO  
Peer Review:  
Analytical Method: 525.2  
Batch: 525\_121231

| CAS        | Compound              | RESULT | Flag | UNITS | PQL | MRL | MDL  | D.F. | COMMENT |
|------------|-----------------------|--------|------|-------|-----|-----|------|------|---------|
| 57837-19-  | METALAXYL             | ND     |      | ug/L  | 0.1 | 0.1 | 0.1  | 1.00 |         |
| 16299-99-  | NAPROPAMIDE           | ND     |      | ug/L  | 0.1 | 0.1 | 0.05 | 1.00 |         |
| 60168-88-  | FENARIMOL             | ND     |      | ug/L  | 0.1 | 0.1 | 0.03 | 1.00 |         |
| 58-89-9    | LINDANE (BHC - GAMMA) | ND     |      | ug/L  | 0.1 | 0.1 | 0.03 | 1.00 |         |
| 72-54-8    | 4,4-DDD               | ND     |      | ug/L  | 0.1 | 0.1 | 0.02 | 1.00 |         |
| 72-55-9    | 4,4-DDE               | ND     |      | ug/L  | 0.1 | 0.1 | 0.02 | 1.00 |         |
| 50-29-3    | 4,4-DDT               | ND     |      | ug/L  | 0.1 | 0.1 | 0.03 | 1.00 |         |
| 88671-89-1 | MYCLOBUTANIL          | ND     |      | ug/L  | 0.1 | 0.1 | 0.1  | 1.00 |         |

### Notes:

Flags are data qualifiers. If there are data qualifiers on your report definitions can be found on an accompanying sheet.

ND - indicates the compound was not detected above the PQL or MDL.

PQL = Practical Quantitation Limit is the lowest level that can be achieved within specified limits of precision and accuracy during routine laboratory operating conditions.

D.F. - Dilution Factor.

If you have any questions concerning this report contact us at the above phone number.

Form: c608.rpt



# Water Analysis Report

714 So. College Avenue  
College Place, WA 99324

Phone: 509-526-9287  
Fax: 509-526-5272

Email : info@wallawatr.com

**Customer Name:** Walla Walla Basin Watershed Council  
**Address:** 811 S Main P.O.Box 68  
**City:** Milton Freewater  
**State:** Oregon **Zip:** 97863

**Invoice #** 1270  
**Date Collected:** 4/23/2013  
**Sampled By:** Troy Baker  
**Report Date:** 5/16/13

| Analyte                 | UNITS    | S-1       | S-2       | S-3       | GW-46     | GW-117    | GW-119    | GW-141    | GW-142    | GW-144    |
|-------------------------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Lab Number              |          | 209-02891 | 209-02888 | 209-02885 | 209-02889 | 209-02887 | 209-02884 | 209-02890 | 209-02886 | 209-02883 |
| pH                      |          | 7.23      | 7.17      | 7.63      | 7.10      | 6.50      | 7.11      | 6.90      | 6.81      | 6.99      |
| Conductivity            | µmhos/cm | 0.06      | 0.06      | 0.07      | 0.06      | 0.26      | 0.39      | 0.22      | 0.10      | 0.65      |
| Dissolved Oxygen        | mg/L     | 11.25     | 11.53     | 11.55     | 10.57     | 8.45      | 10.21     | 10.16     | 10.14     | 8.77      |
| Total Organic Carbon    | mg/L     | 2.05      | 2.23      | 1.28      | 2.36      | 0.40      | 1.22      | 1.06      | 4.70      | 2.14      |
| Nitrate-N               | mg/L     | 0.00      | 0.00      | 0.10      | 0.00      | 0.50      | 6.50      | 2.50      | 0.40      | 18.80     |
| Total Kjeldahl Nitrogen | mg/L     | ND        | ND        | ND        | ND        | 0.36      | 1.44      | 0.32      | ND        | 3.70      |
| Sulfate                 | mg/L     | 0.9       | 0.3       | 1.3       | 1.0       | 14.0      | 17.4      | 12.6      | 3.0       | 30.3      |
| Chloride                | mg/L     | 0.0       | 0.0       | 0.0       | 0.0       | 16.6      | 3.2       | 4.5       | 0.0       | 23.0      |
| Alkalinity              | mg/L     | 30.0      | 30.0      | 34.0      | 32.0      | 84.1      | 148.1     | 88.1      | 48.0      | 146.1     |
| Calcium                 | mg/L     | 5.1       | 4.9       | 5.8       | 5.2       | 20.4      | 32.9      | 19.3      | 8.4       | 51.5      |
| Ortho-Phosphate         | mg/L     | 0.092     | 0.051     | 0.046     | 0.056     | 0.055     | 0.097     | 0.068     | 0.057     | 0.103     |
| Sodium                  | mg/L     | 2.9       | 2.9       | 3.5       | 3.0       | 7.3       | 20.2      | 9.8       | 7.5       | 24.6      |
| Potassium               | mg/L     | 1.7       | 1.9       | 2.1       | 2.4       | 20.0      | 8.5       | 5.3       | 1.0       | 10.3      |
| Magnesium               | mg/L     | 2.1       | 2.1       | 2.4       | 2.3       | 8.7       | 14.4      | 9.2       | 3.6       | 20.6      |
| Aluminum                | mg/L     | 0.46      | 0.440     | 0.445     | 0.244     | 0.025     | 0.015     | 0.842     | 2.490     | 0.210     |
| Iron                    | mg/L     | 0.565     | 0.556     | 0.588     | 0.306     | 0.041     | 0.007     | 0.994     | 1.342     | 0.322     |
| Manganese               | mg/L     | 0.007     | ND        | ND        | ND        | 0.007     | ND        | 0.032     | 0.026     | 0.022     |

Curtis W. Skifstad, Lab Director:



# Water Analysis Report

714 So. College Avenue  
College Place, WA 99324

Phone: 509-526-9287  
Fax: 509-526-5272

Email: info@wallawatr.com

**Customer Name:** Walla Walla Basin Water Shed Council  
**Address:** 811 S Main P.O.Box 68  
**City:** Milton Freewater  
**State:** OR **Zip:** 97863

**Invoice #** 1334  
**Date Collected:** 5/21/2013  
**Sampled By:** Troy Baker  
**Report Date:** 6/17/13

| Analyte                 | UNITS    | S-1       | S-2       | S-3       | GW-46     | GW-117    | GW-119    | GW-141    | GW-142    | GW-144    |
|-------------------------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Lab Number              |          | 209-03096 | 209-03097 | 209-03098 | 209-03099 | 209-03100 | 209-03101 | 209-03102 | 209-03103 | 209-03104 |
| pH                      |          | 7.59      | 7.06      | 7.78      | 7.06      | 6.88      | 7.14      | 7.58      | 7.50      | 6.80      |
| Temperature             | °C       | 16.30     | 16.20     | 16.30     | 16.50     | 16.70     | 16.70     | 16.90     | 16.90     | 16.50     |
| Conductivity            | µmhos/cm | 0.06      | 0.06      | 0.07      | 0.06      | 0.19      | 0.38      | 0.27      | 0.14      | 0.68      |
| Dissolved Oxygen        | mg/L     | 10.60     | 10.5      | 10.23     | 9.02      | 7.77      | 9.05      | 7.54      | 8.13      | 6.52      |
| Total Organic Carbon    | mg/L     | 0.00      | 0.00      | 0.00      | 0.00      | 0.00      | 0.00      | 0.00      | 0.00      | 0.00      |
| Nitrate-N               | mg/L     | 0.00      | 0.00      | 0.00      | 0.00      | 1.10      | 5.90      | 2.80      | 0.10      | 19.90     |
| Total Kjeldahl Nitrogen | mg/L     | ND        | ND        | ND        | ND        | 0.28      | 1.42      | 0.30      | ND        | 3.67      |
| Sulfate                 | mg/L     | 0.5       | 0.2       | 1.2       | 0.5       | 12.0      | 17.7      | 13.5      | 2.4       | 30.9      |
| Chloride                | mg/L     | 0.0       | 0.0       | 0.0       | 0.0       | 12.5      | 3.6       | 43.1      | 0.0       | 22.3      |
| Alkalinity              | mg/L     | 30.4      | 28.8      | 33.6      | 32.0      | 78.1      | 147.7     | 84.9      | 51.2      | 147.1     |
| Calcium                 | mg/L     | 5.0       | 4.8       | 5.7       | 5.1       | 17.6      | 32.5      | 18.8      | 8.0       | 53.4      |
| Ortho-Phosphate         | mg/L     | 0.078     | 0.052     | 0.041     | 0.053     | 0.058     | 0.099     | 0.071     | 0.036     | 0.109     |
| Sodium                  | mg/L     | 3.2       | 2.9       | 3.7       | 3.1       | 7.8       | 20.4      | 11.4      | 9.1       | 25.0      |
| Potassium               | mg/L     | 1.8       | 2.0       | 2.0       | 2.4       | 16.4      | 8.6       | 5.2       | 0.8       | 10.4      |
| Magnesium               | mg/L     | 2.1       | 2.1       | 2.4       | 2.3       | 8.0       | 14.2      | 9.0       | 3.4       | 20.5      |
| Aluminum                | mg/L     | 0.30      | 0.410     | 0.261     | 0.228     | 0.021     | 0.015     | 0.755     | 1.520     | 0.215     |
| Iron                    | mg/L     | 0.472     | 0.503     | 0.226     | 0.310     | 0.046     | 0.006     | 1.012     | 0.975     | 0.031     |
| Manganese               | mg/L     | 0.006     | ND        | ND        | ND        | 0.006     | ND        | 0.033     | 0.021     | 0.021     |

Curtis W. Skifstad, Lab Director:



Burlington WA  
Corporate Office

Bellingham WA  
Microbiology

Portland OR  
Microbiology/Chemistry

1620 S Walnut St - 98233  
800.755.9295 • 360.757.1400

805 Orchard Dr Ste 4 - 98225  
360.671.0688

9150 SW Pioneer Ct Ste W- 97070  
503.682.7802



## SYNTHETIC ORGANIC COMPOUNDS (SOC) REPORT

Client Name: Walla Walla Regional Water Testing Services  
714 S College Avenue  
College Place, WA 99324

Reference Number: 13-08900  
Project: Recharge 209-03104

Project:  
Field ID: Recharge 209-03104  
Sample Description: GW-144  
Sampled By: T. Baker  
Sample Date: 5/21/13  
Source Type:  
Sampler Phone: 541-938-2170

Lab Number: 20604  
Report Date: 6/12/13  
Date Analyzed: 05/28/13  
Date Extracted: 525\_130528  
Analyst: CO  
Released By:  
Analytical Method: 525.2

Pesticides by 525 - Washington Stat

| CAS                              | COMPOUND                   | RESULTS | UNITS | PQL | MDL  | MCL | COMMENT                              |
|----------------------------------|----------------------------|---------|-------|-----|------|-----|--------------------------------------|
| <b>EPA Regulated</b>             |                            |         |       |     |      |     |                                      |
| 72-20-8                          | ENDRIN                     | ND      | ug/L  | 0.1 | 0.03 | 2   |                                      |
| 58-89-9                          | LINDANE (BHC - GAMMA)      | ND      | ug/L  | 0.1 | 0.04 | 0.2 |                                      |
| 72-43-5                          | METHOXYCHLOR               | ND      | ug/L  | 0.1 | 0.03 | 40  |                                      |
| 15972-60-8                       | ALACHLOR                   | ND      | ug/L  | 0.1 | 0.02 | 2   |                                      |
| 1912-24-9                        | ATRAZINE                   | ND      | ug/L  | 0.1 | 0.03 | 3   |                                      |
| 50-32-8                          | BENZO(A)PYRENE             | ND      | ug/L  | 0.1 | 0.02 | 0.2 |                                      |
| 103-23-1                         | DI(ETHYLHEXYL)-ADIPATE     | ND      | ug/L  | 0.1 | 0.03 | 400 |                                      |
| 117-81-7                         | DI(ETHYLHEXYL)-PHTHALATE   | ND      | ug/L  | 0.1 | 0.2  | 6   |                                      |
| 76-44-8                          | HEPTACHLOR                 | ND      | ug/L  | 0.1 | 0.04 | 0.4 |                                      |
| 1024-57-3                        | HEPTACHLOR EPOXIDE         | ND      | ug/L  | 0.1 | 0.04 | 0.2 |                                      |
| 118-74-1                         | HEXACHLOROBENZENE          | ND      | ug/L  | 0.1 | 0.04 | 1   |                                      |
| 77-47-4                          | HEXACHLOROCYCLO-PENTADIENE | ND      | ug/L  | 0.1 | 0.02 | 50  |                                      |
| 122-34-9                         | SIMAZINE                   | ND      | ug/L  | 0.1 | 0.03 | 4   |                                      |
| 87-86-5                          | PENTACHLOROPHENOL          | ND      | ug/L  | 0.4 | 0.4  | 1   | screening only / compliance by 515.4 |
| <b>EPA Unregulated</b>           |                            |         |       |     |      |     |                                      |
| 309-00-2                         | ALDRIN                     | ND      | ug/L  | 0.1 | 0.03 |     |                                      |
| 23184-66-9                       | BUTACHLOR                  | ND      | ug/L  | 0.1 | 0.02 |     |                                      |
| 60-57-1                          | DIELDRIN                   | ND      | ug/L  | 0.1 | 0.01 |     |                                      |
| 51218-45-2                       | METOLACHLOR                | ND      | ug/L  | 0.1 | 0.02 |     |                                      |
| 21087-64-9                       | METRIBUZIN                 | ND      | ug/L  | 0.1 | 0.03 |     |                                      |
| 1918-16-7                        | PROPACHLOR                 | ND      | ug/L  | 0.1 | 0.02 |     |                                      |
| <b>State Unregulated - Other</b> |                            |         |       |     |      |     |                                      |
| 314-40-9                         | BROMACIL                   | ND      | ug/L  | 0.1 | 0.04 |     |                                      |
| 86-73-7                          | FLUORENE                   | ND      | ug/L  | 0.1 | 0.03 |     |                                      |

**NOTES:**

ND = Not detected above the listed practical quantitation limit (PQL) or not above the Method Detection Limit (MDL), if requested.  
MCL (Maximum Contaminant Level) maximum permissible level of a contaminant in water established by EPA; a blank MCL value indicates a level is not currently established.  
PQL = Practical Quantitation Limit is the lowest level that can be achieved within specified limits of precision and accuracy during routine laboratory operating conditions.

An \* in front of the parameter name indicates it is not NELAP accredited but it is accredited through WSDOH or USEPA Region 10.

These test results meet all the requirements of NELAC, unless otherwise stated in writing, and relate only to these samples.  
If you have any questions concerning this report contact Lawrence Henderson at the above phone number.



Burlington WA  
Corporate Office

Bellingham WA  
Microbiology

Portland OR  
Microbiology/Chemistry

1620 S Walnut St - 98233  
800.755.9295 • 360.757.1400

805 Orchard Dr Ste 4 - 98225  
360.671.0688

9150 SW Pioneer Ct Ste W- 97070  
503.682.7802



## SYNTHETIC ORGANIC COMPOUNDS (SOC) REPORT

Client Name: Walla Walla Regional Water Testing Services  
714 S College Avenue  
College Place, WA 99324

Reference Number: 13-08900  
Project: Recharge 209-03104

Project:  
Field ID: Recharge 209-03104  
Sample Description: GW-144  
Sampled By: T. Baker  
Sample Date: 5/21/13  
Source Type:  
Sampler Phone: 541-938-2170

Lab Number: 20604  
Report Date: 6/12/13  
Date Analyzed: 05/28/13  
Date Extracted: 508\_130528  
Analyst: CO  
Released By:  
Analytical Method: 508.1

Pesticides by 525 - Washington Stat

| CAS                   | COMPOUND              | RESULTS | UNITS | PQL | MDL  | MCL | COMMENT |
|-----------------------|-----------------------|---------|-------|-----|------|-----|---------|
| <b>EPA Regulated</b>  |                       |         |       |     |      |     |         |
| 57-74-9               | CHLORDANE, TECHNICAL  | ND      | ug/L  | 0.2 | 0.07 | 2   |         |
| <b>PCBs/Toxaphene</b> |                       |         |       |     |      |     |         |
| 1336-36-3             | PCBS (Total Aroclors) | ND      | ug/L  |     | 0.5  | 0.5 |         |
| 11104-28-2            | AROCLOR 1221          | ND      | ug/L  |     | 0.2  |     |         |
| 11141-16-5            | AROCLOR 1232          | ND      | ug/L  |     | 0.2  |     |         |
| 53469-21-9            | AROCLOR 1242          | ND      | ug/L  |     | 0.3  |     |         |
| 12672-29-6            | AROCLOR 1248          | ND      | ug/L  |     | 0.08 |     |         |
| 11097-69-1            | AROCLOR 1254          | ND      | ug/L  |     | 0.12 |     |         |
| 11096-82-5            | AROCLOR 1260          | ND      | ug/L  |     | 0.1  |     |         |
| 12674-11-2            | AROCLOR 1016          | ND      | ug/L  |     | 0.06 |     |         |
| 8001-35-2             | TOXAPHENE             | ND      | ug/L  | 1   | 0.5  | 3   |         |

**NOTES:**  
ND = Not detected above the listed practical quantitation limit (PQL) or not above the Method Detection Limit (MDL), if requested.  
MCL (Maximum Contaminant Level) maximum permissible level of a contaminant in water established by EPA; a blank MCL value indicates a level is not currently established.  
PQL = Practical Quantitation Limit is the lowest level that can be achieved within specified limits of precision and accuracy during routine laboratory operating conditions.

An \* in front of the parameter name indicates it is not NELAP accredited but it is accredited through WSDOH or USEPA Region 10.

These test results meet all the requirements of NELAC, unless otherwise stated in writing, and relate only to these samples.  
If you have any questions concerning this report contact Lawrence Henderson at the above phone number.



Burlington WA  
Corporate Office

Bellingham WA  
Microbiology

Portland OR  
Microbiology/Chemistry

1620 S Walnut St - 98233  
800.755.9295 • 360.757.1400

805 Orchard Dr Ste 4 - 98225  
360.671.0688

9150 SW Pioneer Ct Ste W- 97070  
503.682.7802

June 19, 2013

Page 1 of 1

## Case Narrative

Reference: **13-08900**

| Lab Sample ID                            | Sample Information   |
|--|--|
| <b>20604</b>                             | <b>Recharge 209-03104 - GW-144</b>   |
| <b>Analytical Method</b><br><b>525.2</b> | <b>Notes</b><br>BisPhenol-A was detected in the analysis estimated at 0.1 ug/L. The field dup was analyzed and verified the detection. |
|  | <b>Created by</b><br>CO  |



Burlington WA  
Corporate Office

Bellingham WA  
Microbiology

Portland OR  
Microbiology/Chemistry

1620 S Walnut St - 98233  
800.755.9295 • 360.757.1400

805 Orchard Dr Ste 4 - 98225  
360.671.0688

9150 SW Pioneer Ct Ste W- 97070  
503.682.7802

# Data Report

Client Name: Walla Walla Regional Water Testing Services  
714 S College Avenue  
College Place, WA 99324

Reference Number: **13-08871**  
Project: Recharge TOC

Report Date: 6/6/13

Date Received: 5/22/13

Reviewed by:

| Sample Description: GW-144 |                      |                 |      |      |        |       |      |          |          | Sample Date: 5/21/13     |            |         |
|----------------------------|----------------------|-----------------|------|------|--------|-------|------|----------|----------|--------------------------|------------|---------|
| Lab Number: 20537          |                      | Sample Comment: |      |      |        |       |      |          |          | Collected By: Troy Baker |            |         |
| CAS ID#                    | Parameter            | Result          | PQL  | MRL  | MDL    | Units | DF   | Method   | Analyzed | Analyst                  | Batch      | Comment |
| E-10195                    | TOTAL ORGANIC CARBON | 3.86            | 0.15 | 0.50 | 0.0798 | mg/L  | 1.00 | SM5310 B | 6/3/13   | BJ                       | TOC_130603 |         |

| Sample Description: GW-119 |                      |                 |      |      |        |       |      |          |          | Sample Date: 5/21/13     |            |         |
|----------------------------|----------------------|-----------------|------|------|--------|-------|------|----------|----------|--------------------------|------------|---------|
| Lab Number: 20538          |                      | Sample Comment: |      |      |        |       |      |          |          | Collected By: Troy Baker |            |         |
| CAS ID#                    | Parameter            | Result          | PQL  | MRL  | MDL    | Units | DF   | Method   | Analyzed | Analyst                  | Batch      | Comment |
| E-10195                    | TOTAL ORGANIC CARBON | 1.37            | 0.15 | 0.50 | 0.0798 | mg/L  | 1.00 | SM5310 B | 6/3/13   | BJ                       | TOC_130603 |         |

| Sample Description: S-3 |                      |                 |      |      |        |       |      |          |          | Sample Date: 5/21/13     |            |         |
|-------------------------|----------------------|-----------------|------|------|--------|-------|------|----------|----------|--------------------------|------------|---------|
| Lab Number: 20539       |                      | Sample Comment: |      |      |        |       |      |          |          | Collected By: Troy Baker |            |         |
| CAS ID#                 | Parameter            | Result          | PQL  | MRL  | MDL    | Units | DF   | Method   | Analyzed | Analyst                  | Batch      | Comment |
| E-10195                 | TOTAL ORGANIC CARBON | 1.11            | 0.15 | 0.50 | 0.0798 | mg/L  | 1.00 | SM5310 B | 6/3/13   | BJ                       | TOC_130603 |         |

| Sample Description: GW-142 |                      |                 |      |      |        |       |      |          |          | Sample Date: 5/21/13     |            |         |
|----------------------------|----------------------|-----------------|------|------|--------|-------|------|----------|----------|--------------------------|------------|---------|
| Lab Number: 20540          |                      | Sample Comment: |      |      |        |       |      |          |          | Collected By: Troy Baker |            |         |
| CAS ID#                    | Parameter            | Result          | PQL  | MRL  | MDL    | Units | DF   | Method   | Analyzed | Analyst                  | Batch      | Comment |
| E-10195                    | TOTAL ORGANIC CARBON | 0.95            | 0.15 | 0.50 | 0.0798 | mg/L  | 1.00 | SM5310 B | 6/3/13   | BJ                       | TOC_130603 |         |

| Sample Description: GW-117 - Sunnyside |                      |                 |      |      |        |       |      |          |          | Sample Date: 5/21/13     |            |         |
|--|----------------------|-----------------|------|------|--------|-------|------|----------|----------|--------------------------|------------|---------|
| Lab Number: 20541                      |                      | Sample Comment: |      |      |        |       |      |          |          | Collected By: Troy Baker |            |         |
| CAS ID#                                | Parameter            | Result          | PQL  | MRL  | MDL    | Units | DF   | Method   | Analyzed | Analyst                  | Batch      | Comment |
| E-10195                                | TOTAL ORGANIC CARBON | 0.97            | 0.15 | 0.50 | 0.0798 | mg/L  | 1.00 | SM5310 B | 6/3/13   | BJ                       | TOC_130603 |         |

| Sample Description: S-2 - Duff Weir |                      |                 |      |      |        |       |      |          |          | Sample Date: 5/21/13     |            |         |
|-------------------------------------|----------------------|-----------------|------|------|--------|-------|------|----------|----------|--------------------------|------------|---------|
| Lab Number: 20542                   |                      | Sample Comment: |      |      |        |       |      |          |          | Collected By: Troy Baker |            |         |
| CAS ID#                             | Parameter            | Result          | PQL  | MRL  | MDL    | Units | DF   | Method   | Analyzed | Analyst                  | Batch      | Comment |
| E-10195                             | TOTAL ORGANIC CARBON | 1.82            | 0.15 | 0.50 | 0.0798 | mg/L  | 1.00 | SM5310 B | 6/3/13   | BJ                       | TOC_130603 |         |

| Sample Description: GW-46 - H Recharge |                      |                 |      |      |        |       |      |          |          | Sample Date: 5/21/13     |            |         |
|--|----------------------|-----------------|------|------|--------|-------|------|----------|----------|--------------------------|------------|---------|
| Lab Number: 20543                      |                      | Sample Comment: |      |      |        |       |      |          |          | Collected By: Troy Baker |            |         |
| CAS ID#                                | Parameter            | Result          | PQL  | MRL  | MDL    | Units | DF   | Method   | Analyzed | Analyst                  | Batch      | Comment |
| E-10195                                | TOTAL ORGANIC CARBON | 0.87            | 0.15 | 0.50 | 0.0798 | mg/L  | 1.00 | SM5310 B | 6/3/13   | BJ                       | TOC_130603 |         |

Notes:

ND = Not detected above the listed practical quantitation limit (PQL) or not above the Method Detection Limit (MDL), if requested.  
PQL = Practical Quantitation Limit is the lowest level that can be achieved within specified limits of precision and accuracy during routine laboratory operating conditions.  
D.F. - Dilution Factor

If you have any questions concerning this report contact Lawrence Henderson at the above phone number.



## **APPENDIX F – WELL LOGS FOR MONITORING WELLS**

---





GW\_34

STATE ENGINEER  
Salem, Oregon

UMAT  
4135

UMAT Well Record

GR- 1099

STATE WELL NO. 6X/34-24R(1)  
COUNTY Umatilla  
APPLICATION NO. OB-1139

OWNER: John L. Richards

MAILING ADDRESS: Rt. 2, Box 129

LOCATION OF WELL: Owner's No. \_\_\_\_\_

CITY AND STATE: Milton-Freewater, Oregon

SE  $\frac{1}{4}$  NW  $\frac{1}{4}$  Sec. 24 T. 6 N. R. 34 E. W.M.

Bearing and distance from section or subdivision corner 150' N. & 7' W. from Center of Sec. 24



Section 24

Altitude at well 750 ft.

TYPE OF WELL: Drilled Date Constructed 1918

Depth drilled 50 ft. Depth cased 25 ft.

CASING RECORD:

10 inch from 8 to 13 ft.  
8 inch from 13 to 33 ft.

FINISH:

AQUIFERS:

Gravel

WATER LEVEL:

16 ft.

PUMPING EQUIPMENT: Type Sterling Cent. 3 in. H.P. 3  
Capacity 350 G.P.M.

WELL TESTS:

Drawdown 22 ft. after \_\_\_\_\_ hours 300 G.P.M.

Drawdown \_\_\_\_\_ ft. after \_\_\_\_\_ hours \_\_\_\_\_ G.P.M.

USE OF WATER Irrigation Temp. \_\_\_\_\_ °F. \_\_\_\_\_ 19.

SOURCE OF INFORMATION G. R. Record

DRILLER or DIGGER \_\_\_\_\_

ADDITIONAL DATA:

Log N.A. Water Level Measurements \_\_\_\_\_ Chemical Analysis \_\_\_\_\_ Aquifer Test \_\_\_\_\_

REMARKS:

Irrigation of 20 acres.

**GW\_35**

No well log

NOTICE TO WATER WELL CONTRACTOR  
The original and first copy of this report are to be filed with the  
STATE ENGINEER, SALEM, OREGON  
within 30 days from the date of well completion.

**RECEIVED**  
FEB 13 1980  
STATE OF OREGON  
WATER RESOURCES DEPT  
SALEM, OREGON

GW36

**RECEIVED**  
DEC 21 1981  
State Well No. 62/35E-30ac

(1) OWNER: Barka A Kelly  
Name: William A Kelly  
Address: RT#1 Box 214-A M.F. Co. 97802

(10) LOCATION OF WELL:  
County: Umatilla Driller's well number: 4822  
SW. 1/4 NE 1/4 Section 30 T. 6N R. 35 E W.M.  
Bearing and distance from section or subdivision corner:  
Well located center of property

(2) TYPE OF WORK (check):  
New Well  Deepening  Reconditioning  Abandon   
If abandonment, describe material and procedure in Item 13.

(11) WATER LEVEL: Completed well  
Depth at which water was first found: 55 ft.  
Static level: 38 ft. below land surface. Date: Dec. 2  
Artesian pressure: \_\_\_\_\_ lbs. per square inch. Date: \_\_\_\_\_

(3) TYPE OF WELL: Rotary  Driven  Cable  Dug  Bored   
(4) PROPOSED USE (check): Domestic  Industrial  Municipal  Irrigation  Test Well  Other

(5) CASING INSTALLED:  
Threaded  Welded   
10" diam. from 0 ft. to 200-4 ft. Gage: 250  
" diam. from \_\_\_\_\_ ft. to \_\_\_\_\_ ft. Gage \_\_\_\_\_  
" diam. from \_\_\_\_\_ ft. to \_\_\_\_\_ ft. Gage \_\_\_\_\_

(12) WELL LOG: Diameter of well below casing \_\_\_\_\_ ft.  
Depth drilled \_\_\_\_\_ ft. Depth of completed well \_\_\_\_\_ ft.  
FORMATION: LITHOLOGICAL CORRECTION, SECTION, STRATIGRAPHY, AND STRUCTURE OF FORMATION and show thickness and nature of rock strata and aquifer penetrated, with at least one entry for each change of formation. Report each change in position of Static Water Level and indicate principal water-bearing strata.

(6) PERFORATIONS: Perforated?  Yes  No  
Type of perforator used: Acetylene  
Size of perforations: 3/8 in. by 8 in.  
\_\_\_\_\_ perforations from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
170 perforations from 25 ft. to 190 ft.  
\_\_\_\_\_ perforations from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

| MATERIAL                | From    | To     | GWL |
|-------------------------|---------|--------|-----|
| Top soil & clay         | 0       | 11     |     |
| Cement Gravel - Brown   | 11      | 55     |     |
| Cement Gravel - Brown   |         |        |     |
| Parting water           | 55      | 86     | 55  |
| Clay - Brown            | 86      | 92     |     |
| Gravel clearence        |         |        |     |
| Spine water             | 125-137 | 92-168 | 35  |
| Clay - Brown            | 168     | 174    |     |
| Gravel - Brown Cement   | 174     | 195    |     |
| Gravel - Brown - Caving | 195     | 195    |     |
| Gravel Cement - Brown   | 198     | 348    | 35  |
| Clay - Brown            | 348     | 371    |     |
| Gravel clearence - Mod. | 371     | 382    | 38  |
| Clay - Brown            | 382     | 387    |     |
| Gravel Cement           | 387     | 394    |     |
| Clay - Brown            | 394     | 399    |     |
| Gravel Cement           | 399     | 412    |     |

(7) SCREENS: Well screen installed?  Yes  No  
Manufacture name: 125# P.V.C.  
1456 Model No. \_\_\_\_\_  
Diam. 8 Slot size 1/8 x 1/16" ft. to \_\_\_\_\_ ft.  
Diam. \_\_\_\_\_ Slot size \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

(8) WELL TESTS: Drawdown is amount water level is lowered below static level  
Was a pump test made?  Yes  No If yes, by whom: Manhatt  
Yield: \_\_\_\_\_ gal./min. with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.  
90 - 165 - 10  
130 - 300 - 15  
Boiler test \_\_\_\_\_ gal./min. with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.  
Artesian flow \_\_\_\_\_ ft./hr.

Work started July 16 1979 Completed Dec. 2 1979  
Date well drilling machine moved off of well: Dec. 4 1979

(9) CONSTRUCTION:  
Well seal - Material used: Cement  
Well sealed from land surface to 22 - Spout pump ft.  
Diameter of well bore to bottom of seal: 14 in.  
Diameter of well bore below seal: 10 in.  
Number of sacks of cement used in well seal: 12 sacks  
Number of sacks of bentonite used in well seal: \_\_\_\_\_ sacks  
Brand name of bentonite: \_\_\_\_\_  
Number of pounds of bentonite per 100 gallons of water: \_\_\_\_\_ lbs./100 gals.  
Was a drive shaft used?  Yes  No Phase \_\_\_\_\_ Size location \_\_\_\_\_ ft.  
Did any strata contain unobtainable water?  Yes  No  
Type of water: \_\_\_\_\_ depth of strata: \_\_\_\_\_  
Method of sealing strata off: \_\_\_\_\_  
\_\_\_\_\_ well gravel packoff?  Yes  No Size of gravel: \_\_\_\_\_  
Gravel placed from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Drilling Machine Operator's Certification:  
This well was constructed under my direct supervision. Materials used and information reported above are true to my best knowledge and belief.  
(Signed) Lowell H. Madath Date Dec. 4 1979  
(Drilling Machine Operator)  
Drilling Machine Operator's License No. 11

Water Well Contractor's Certification:  
This well was drilled under my jurisdiction and this report is true to the best of my knowledge and belief.  
Name Lowell H. Madath  
(Person, firm or corporation)  
Address RT#2 Box 140-B M. F. Co.  
(Signed) Lowell H. Madath  
(Water Well Contractor)  
Contractor's License No. 265 Date Dec 4 1979

STATE ENGINEER  
Salem, Oregon

UMAT  
4919

Well Record

STATE WELL NO. 6N/35-33H  
COUNTY Umatilla  
APPLICATION NO. GR-4228

OWNER: Wm. J. & Carolyn K. Jackson

MAILING ADDRESS: Route 2, Box 318

LOCATION OF WELL: Owner's No.

CITY AND STATE: Milton-Freewater, Oregon

SE 1/4 NE 1/4 Sec. 33 T. 6 N. S. R. 35 E. W.M.  
Bearing and distance from section or subdivision  
corner 100' W. & 150' N. of B<sup>1</sup>/<sub>2</sub> Cor. Sec. 33



Section 33

Altitude at well

TYPE OF WELL: <sup>Drill 75'</sup> Drilling 120' Date Constructed 1895

Depth drilled 120 ft. Depth cased

CASING RECORD:

FINISH:

AQUIFERS:

WATER LEVEL:

30 feet below surface

PUMPING EQUIPMENT: Type Peerless turbine H.P. 10  
Capacity 600 G.P.M.

WELL TESTS:

Drawdown ft. after hours G.P.M.  
Drawdown ft. after hours G.P.M.

USE OF WATER Irrigation Temp. °F. 18

SOURCE OF INFORMATION Well Registration Statement Cert. # GR-3767

DRILLER or DIGGER

ADDITIONAL DATA:

Log Water Level Measurements Chemical Analysis Aquifer Test

REMARKS:

**GW\_40**

No well log



**GW\_41**

No well log

STATE OF OREGON  
MONITORING WELL REPORT

UMAT 55115  
UMAT 55115

OBS 3

Well ID# 663871  
Start Card # 163229

(as required by ORS 537.765 & OAR 690-240-095)  
Instructions for completing this report are on the last page of this form.

(1) OWNER/PROJECT WELL NO. MW-3  
Name Hillette Johnson  
Address 52833 Sunquist Rd.  
City Milton Freewater State Or Zip 97862

(6) LOCATION OF WELL By legal description:  
County Washita Latitude \_\_\_\_\_ Longitude \_\_\_\_\_  
Township 6 (N or S) Range 35 (E or W) Section 33  
SE 1/4 of NE 1/4 of above section.

(2) TYPE OF WORK  
 New construction  Alteration (Repair/Recondition)  
 Conversion  Deepening  Abandonment


Street address of well location Near Hudson Byp Canal  
Approx 500' west of Rd. bordering east  
Tax lot number of well location edge of sec. 33 m. Freewater  
ATTACH MAP WITH LOCATION IDENTIFIED. Map shall include approximate scale and north arrow.

(3) DRILLING METHOD  
 Rotary Air  Rotary Mud  Cable  
 Hollow Stem Auger  Other \_\_\_\_\_

(7) STATIC WATER LEVEL:  
49 Ft. below land surface. Date 3/10/04  
Artesian Pressure \_\_\_\_\_ lb/sq. in. Date \_\_\_\_\_

(4) BORE HOLE CONSTRUCTION:  
Yes No  
Special Standards   Depth of Completed Well 71 ft.

(8) WATER BEARING ZONES:  
Depth at which water was first found 49

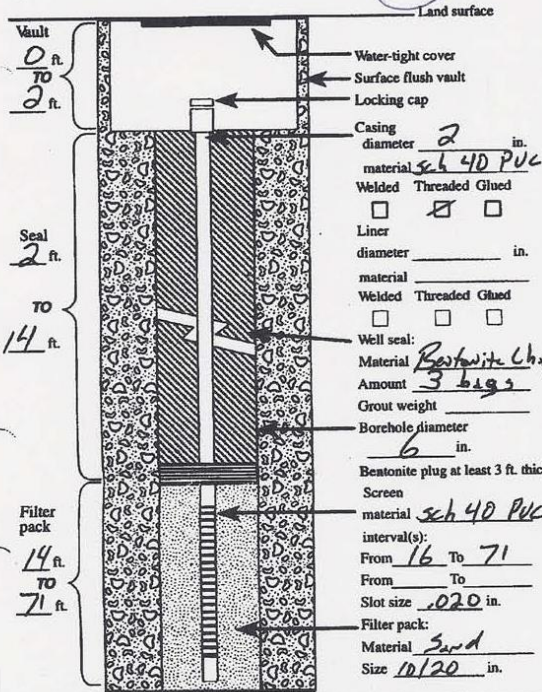

| From | To | Est. Flow Rate | SWL |
|------|----|----------------|-----|
|      |    |                |     |
|      |    |                |     |
|      |    |                |     |
|      |    |                |     |

(9) WELL LOG:  
Ground Elevation \_\_\_\_\_

| Material            | From | To | SWL |
|---------------------|------|----|-----|
| Sand silt w/ gravel | 0    | 2  |     |
| Gravel w/ some sand | 2    | 22 |     |
| Silty Gravel        | 22   | 40 |     |
| Gravel w/ sand      | 40   | 62 | 49  |
| Silty sand          | 62   | 71 | 49  |
|                     |      |    |     |
|                     |      |    |     |
|                     |      |    |     |
|                     |      |    |     |
|                     |      |    |     |

RECEIVED APR 12 2004 WATER RESOURCES DEPT SALEM, OREGON  
RECEIVED MAY 03 2004 WATER RESOURCES DEPT SALEM, OREGON

(5) WELL TESTS:  
 Pump  Bailer  Air  Flowing Artesian  
Permeability \_\_\_\_\_ Yield \_\_\_\_\_ GPM  
Conductivity \_\_\_\_\_ PH \_\_\_\_\_  
Temperature of water 54 °C Depth artesian flow found \_\_\_\_\_ ft.  
Was water analysis done?  Yes  No  
By whom? \_\_\_\_\_  
Depth of strata to be analyzed. From \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
Remarks: \_\_\_\_\_  
Name of supervising Geologist/Engineer Kevin Lindsey

Date started 3/9/04 Completed 3/10/04  
(unbonded) Monitor Well Constructor Certification:  
I certify that the work I performed on the construction, alteration, or abandonment of this well is in compliance with Oregon water supply well construction standards. Materials used and information reported above are true to the best of my knowledge and belief.  
Signed Kevin Lindsey MWC Number 104130 Date 4/13/04  
(bonded) Monitor Well Constructor Certification:  
I accept responsibility for the construction, alteration, or abandonment work performed on this well during the construction dates reported above. All work performed during this time is in compliance with Oregon water supply well construction standards. This report is true to the best of my knowledge and belief.  
Signed Kevin Lindsey MWC Number 10054 Date 4/16/04

UMAT 55114  
UMAT 55114

OBS 1

STATE OF OREGON  
**MONITORING WELL REPORT**

(as required by ORS 537.765 & OAR 690-240-093)  
Instructions for completing this report are on the last page of this form.

Well ID# L63869  
Start Card # 163227

(1) OWNER/PROJECT WELL NO. MW-1  
Name HULENE JOHNSON  
Address 52833 Sunquist Rd.  
City Mt. Hood Firewater State Or. Zip 97862

(6) LOCATION OF WELL By legal description:  
County Umatilla Latitude \_\_\_\_\_ Longitude \_\_\_\_\_  
Township 6 (N or S) Range 350 (E or W) Section 33  
SW 1/4 of NE 1/4 of above section.  
Street address of well location New Hudson Bay Canal  
approx 1200' West of road bordering East  
Tax lot number of well location edge of Sec 33 Mt. Hood  
ATTACH MAP WITH LOCATION IDENTIFIED. Map shall include Free water  
approximate scale and north arrow.

(2) TYPE OF WORK  
 New construction     Alteration (Repair/Recondition)  
 Conversion     Deepening     Abandonment


(3) DRILLING METHOD  
 Rotary Air     Rotary Mud     Cable  
 Hollow Stem Auger     Other \_\_\_\_\_

(7) STATIC WATER LEVEL:  
59 Ft. below land surface.    Date 3/19/04  
Artesian Pressure \_\_\_\_\_ lb/sq. in.    Date \_\_\_\_\_

(4) BORE HOLE CONSTRUCTION:  
Special Standards  Yes  No    Depth of Completed Well 67 ft.

(8) WATER BEARING ZONES:  
Depth at which water was first found 59'

| From | To | Est. Flow Rate | SWL |
|------|----|----------------|-----|
|      |    |                |     |
|      |    |                |     |
|      |    |                |     |
|      |    |                |     |

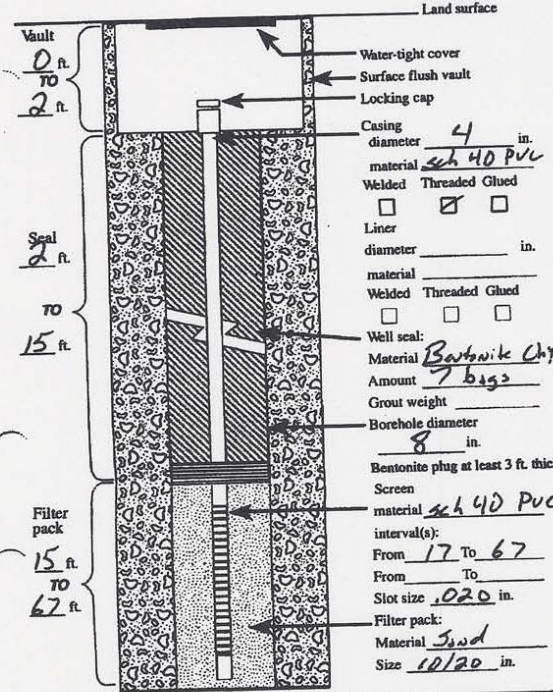

(9) WELL LOG:  
Ground Elevation \_\_\_\_\_

| Material                   | From      | To        | SWL       |
|----------------------------|-----------|-----------|-----------|
| <u>Gravel w/some sand</u>  | <u>0</u>  | <u>24</u> |           |
| <u>Silty Gravel</u>        | <u>24</u> | <u>50</u> |           |
| <u>Gravel w/silty sand</u> | <u>50</u> | <u>67</u> | <u>59</u> |
|                            |           |           |           |
|                            |           |           |           |
|                            |           |           |           |
|                            |           |           |           |
|                            |           |           |           |
|                            |           |           |           |
|                            |           |           |           |

RECEIVED APR 12 2004 WATER RESOURCES DEPT SALEM, OREGON

RECEIVED MAY 03 2004 WATER RESOURCES DEPT SALEM, OREGON

(5) WELL TESTS:  
 Pump     Bailer     Air     Flowing Artesian  
Permeability \_\_\_\_\_ Yield \_\_\_\_\_ GPM  
Conductivity \_\_\_\_\_ PH \_\_\_\_\_  
Temperature of water 54.0 °C    Depth artesian flow found \_\_\_\_\_ ft.  
By whom? \_\_\_\_\_  
Depth of strata to be analyzed. From \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
Remarks: \_\_\_\_\_  
Name of supervising Geologist/Engineer Kerwin Lindsay

Date started 3/19/04    Completed 3/19/04  
(unbonded) Monitor Well Constructor Certification:  
I certify that the work I performed on the construction, alteration, or abandonment of this well is in compliance with Oregon water supply well construction standards. Materials used and information reported above are true to the best of my knowledge and belief.  
Signed [Signature]    MWC Number 10430    Date 4/3/04

(bonded) Monitor Well Constructor Certification:  
I accept responsibility for the construction, alteration, or abandonment work performed on this well during the construction dates reported above. All work performed during this time is in compliance with Oregon water supply well construction standards. This report is true to the best of my knowledge and belief.  
Signed [Signature]    MWC Number 10054    Date 4/16/04

UBS2

STATE OF OREGON  
**MONITORING WELL REPORT**  
 (as required by ORS 537.765 & OAR 690-240-095)

UMAT 55116  
 UMAT 55116

Well ID# L63870  
 Start Card # 163228

Instructions for completing this report are on the last page of this form.

(1) OWNER/PROJECT Name: Hillette Johnson WELL NO. MW-2  
 Address: 52833 SUNQUIST RD.  
 City: Milton Freewater State: Or. Zip: 97862

(6) LOCATION OF WELL By legal description:  
 County: Wasilla Latitude: \_\_\_\_\_ Longitude: \_\_\_\_\_  
 Township: 6 (N or S) Range: 35 (E or W) Section: 33  
 SW 1/4 of NE 1/4 of above section.

(2) TYPE OF WORK  
 New construction     Alteration (Repair/Recondition)  
 Conversion     Deepening     Abandonment


Street address of well location: New Hudson Bay Canal Approx. 1100' West of Rd. bordering east edge of  
 Tax lot number of well location: section 33 Milton Freewater  
 ATTACH MAP WITH LOCATION IDENTIFIED. Map shall include approximate scale and north arrow.

(3) DRILLING METHOD  
 Rotary Air     Rotary Mud     Cable  
 Hollow Stem Auger     Other \_\_\_\_\_

(7) STATIC WATER LEVEL:  
50 Ft. below land surface. Date: 3/19/04  
 Artesian Pressure \_\_\_\_\_ lb/sq. in. Date \_\_\_\_\_

(4) BORE HOLE CONSTRUCTION:  
 Yes No  
 Special Standards   Depth of Completed Well 60 ft.

(8) WATER BEARING ZONES:  
 Depth at which water was first found 50'

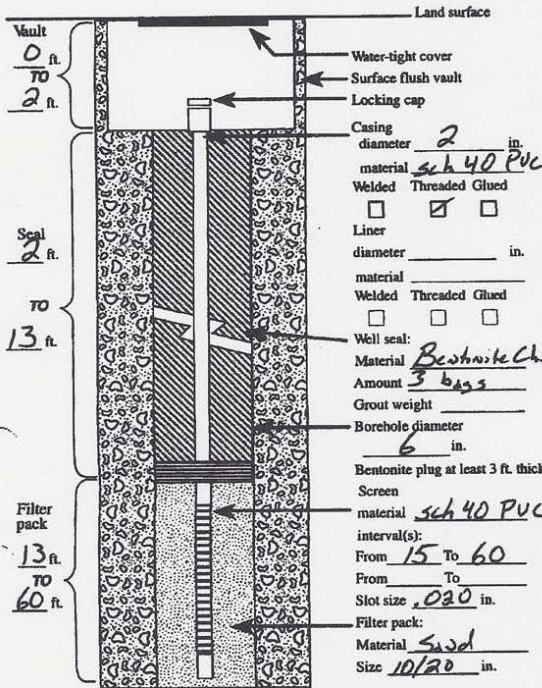

| From | To | Est. Flow Rate | SWL |
|------|----|----------------|-----|
|      |    |                |     |
|      |    |                |     |
|      |    |                |     |
|      |    |                |     |

(9) WELL LOG:  
 Ground Elevation \_\_\_\_\_

| Material            | From | To | SWL |
|---------------------|------|----|-----|
| Gravel w/ some sand | 0    | 22 |     |
| Silty Gravel        | 22   | 44 |     |
| Gravel w/ sands     | 44   | 60 | 50  |
|                     |      |    |     |
|                     |      |    |     |
|                     |      |    |     |
|                     |      |    |     |
|                     |      |    |     |
|                     |      |    |     |
|                     |      |    |     |
|                     |      |    |     |

RECEIVED

RECEIVED

APR 12 2004

MAY 03 2004

WATER RESOURCES DEPT  
 SALEM, OREGON

WATER RESOURCES DEPT  
 SALEM, OREGON

Date started 3/19/04 Completed 3/19/04

(5) WELL TESTS:  
 Pump     Bailor     Air     Flowing Artesian  
 Permeability \_\_\_\_\_ Yield \_\_\_\_\_ GPM  
 Conductivity \_\_\_\_\_ PH \_\_\_\_\_  
 Temperature of water 54 °C Depth artesian flow found \_\_\_\_\_ ft.  
 Was water analysis done?  Yes  No  
 By whom? \_\_\_\_\_  
 Depth of strata to be analyzed. From \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
 Remarks: \_\_\_\_\_

(unbonded) Monitor Well Constructor Certification:  
 I certify that the work I performed on the construction, alteration, or abandonment of this well is in compliance with Oregon water supply well construction standards. Materials used and information reported above are true to the best of my knowledge and belief.  
 Signed: [Signature] MWC Number: 10430 Date: 4/13/04

(bonded) Monitor Well Constructor Certification:  
 I accept responsibility for the construction, alteration, or abandonment work performed on this well during the construction dates reported above. All work performed during this time is in compliance with Oregon water supply well construction standards. This report is true to the best of my knowledge and belief.  
 Signed: [Signature] MWC Number: 10054 Date: 4/16/04

Name of supervising Geologist/Engineer: Kevin Lindsey

ORIGINAL COPY - WATER RESOURCES DEPARTMENT    FIRST COPY - CONSTRUCTOR    SECOND COPY - CUSTOMER

UMAT 55117  
UMAT 55117

OBS4

**STATE OF OREGON**  
**MONITORING WELL REPORT**  
(as required by ORS 537.765 & OAR 690-240-095)

Well ID# L63872  
Start Card # 163230

Instructions for completing this report are on the last page of this form.

(1) **OWNER/PROJECT** WFI I. NO. MW-4  
Name MUSSETTE JOHNSON  
Address 52833 SUNQUIST RD.  
City Milton Freewater State OR Zip 97862

(6) **LOCATION OF WELL By legal description:**  
County Umatilla Latitude \_\_\_\_\_ Longitude \_\_\_\_\_  
Township 6 (N or S) Range 35 (E or W) Section 33  
SW 1/4 of NE 1/4 of above section.

(2) **TYPE OF WORK**  
 New construction  Alteration (Repair/Recondition)  
 Conversion  Deepening  Abandonment


Street address of well location Approx 1100 West of Rd bordering east edge  
Tax lot number of well location of sec 33 Milton Freewater  
ATTACH MAP WITH LOCATION IDENTIFIED. Map shall include approximate scale and north arrow.

(3) **DRILLING METHOD**  
 Rotary Air  Rotary Mud  Cable  
 Hollow Stem Auger  Other \_\_\_\_\_

(7) **STATIC WATER LEVEL:**  
49 Ft. below land surface. Date 3/10/04  
Artesian Pressure \_\_\_\_\_ lb/sq. in. Date \_\_\_\_\_

(4) **BORE HOLE CONSTRUCTION:**  
Yes No  
Special Standards   Depth of Completed Well 61 ft.

(8) **WATER BEARING ZONES:**  
Depth at which water was first found 49

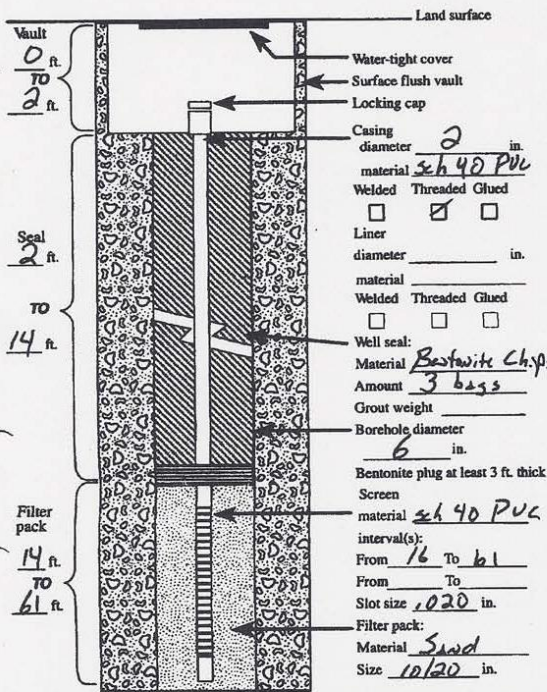

| From | To | Est. Flow Rate | SWL |
|------|----|----------------|-----|
|      |    |                |     |
|      |    |                |     |
|      |    |                |     |
|      |    |                |     |

(9) **WELL LOG:**  
Ground Elevation \_\_\_\_\_

| Material     | From | To | SWL |
|--------------|------|----|-----|
| Sandy Silt   | 0    | 3  |     |
| Sandy Gravel | 3    | 18 |     |
| Silty Gravel | 18   | 38 |     |
| Sandy Gravel | 38   | 47 |     |
| Silty Gravel | 47   | 61 | 49  |
|              |      |    |     |
|              |      |    |     |
|              |      |    |     |
|              |      |    |     |
|              |      |    |     |

**RECEIVED**  
APR 12 2004  
WATER RESOURCES DEPT  
SALEM, OREGON

**RECEIVED**  
MAY 03 2004  
WATER RESOURCES DEPT  
SALEM, OREGON

(5) **WELL TESTS:**  
 Pump  Bailor  Air  Flowing Artesian  
Permeability \_\_\_\_\_ Yield \_\_\_\_\_ GPM  
Conductivity \_\_\_\_\_ PH \_\_\_\_\_  
Temperature of water 54 °C Depth artesian flow found \_\_\_\_\_ ft.  
Was water analysis done?  Yes  No  
By whom? \_\_\_\_\_  
Depth of strata to be analyzed. From \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
Remarks: \_\_\_\_\_

Date started 3/10/04 Completed 3/10/04  
(unbonded) Monitor Well Constructor Certification:  
I certify that the work I performed on the construction, alteration, or abandonment of this well is in compliance with Oregon water supply well construction standards. Materials used and information reported above are true to the best of my knowledge and belief.  
Signed [Signature] MWC Number 10430 Date 4/3/04

(bonded) Monitor Well Constructor Certification:  
I accept responsibility for the construction, alteration, or abandonment work performed on this well during the construction dates reported above. All work performed during this time is in compliance with Oregon water supply well construction standards. This report is true to the best of my knowledge and belief.  
Signed [Signature] MWC Number 10054 Date 4/16/04

Name of supervising Geologist/Engineer Kevin Lindsey  
ORIGINAL COPY - WATER RESOURCES DEPARTMENT FIRST COPY - CONSTRUCTOR SECOND COPY - CUSTOMER

**GW\_62**

No well log

**GW\_63**

No well log

GW\_117

**UMAT 56444**

STATE OF OREGON  
 MONITORING WELL REPORT  
 (as required by ORS 517.745 & OAR 690-240-0395)

WELL LABEL # 91062  
 START CARD # 1007459

(1) LAND OWNER  
 Owner Well ID: MW-10  
 First Name: Dennis Last Name: Banks  
 Company:  
 Address: 84452 Hwy 33N  
 City: Albino-Fremont, OR Zip: 97862

(6) LOCATION OF WELL (legal description)  
 County: Washello Range: 35 W 1/4  
 Sec: 27 1/4 of the 5E T4N  
 Tax Map Number: \_\_\_\_\_ Lot:  
 Type: \_\_\_\_\_ (RMS or (R))  
 \_\_\_\_\_ (RMS or (R))  
 Street address of well:  Nearest address:

(2) TYPE OF WORK  New  Deepening  Conversion  
 Alteration (repair/replacement)  Abandonment

Sunny Side Rd. Orchard

(3) DRILL METHOD  
 Rotary Air  Rotary Mud  Cable  Hollow Stem Auger  Cable Mud  
 Reverse Rotary  Other

(7) STATIC WATER LEVEL  
 Existing Well / Nondeepening: \_\_\_\_\_ Date: 8/17/09 + SWL (ft): \_\_\_\_\_  
 Completed Well: \_\_\_\_\_ Date: \_\_\_\_\_ + SWL (ft): \_\_\_\_\_  
 Flowing Artesian?  Dry Hole?   
 Depth water was first found: 39'

(4) CONSTRUCTION  
 Depth of Completed Well: 70 ft. Special Standard?  Perimeter Well?

WATER BEARING ZONES

| DATE           | From      | To        | Flow | SWL (ft) | SWL (ft)  |
|----------------|-----------|-----------|------|----------|-----------|
| <u>7/17/09</u> | <u>39</u> | <u>70</u> |      |          | <u>39</u> |



MONUMENT/Vault Below Ground  
 From: 0 To: 1.5

BORE HOLE  
 Diameter: 6" From: 0 To: 70'

CASING  
 Dia: 2" From: 0.5 To: 35  
 Gauge: sch 40 Wt. Tied: \_\_\_\_\_  
 Material:  Steel  Plastic  Other

LINER  
 Dia: \_\_\_\_\_ To: \_\_\_\_\_  
 Gauge: N/A Wt. Tied: \_\_\_\_\_  
 Material:  Steel  Plastic  Other

SEAL  
 From: 1.5' To: 3.5'  
 Material: Butterfly clips  
 Amount: 6 bags Gross weight: \_\_\_\_\_

SCREEN  
 Diameter: 2" From: 35' To: 70'  
 Mesh Size: 10/20

FILTER  
 From: 33' To: 70' Material: Sand Size of pack: 10/20

(8) WELL LOG

| Material                         | From      | To        |
|----------------------------------|-----------|-----------|
| <u>split gravel</u>              | <u>9</u>  | <u>9</u>  |
| <u>Silty fine sand w/ gravel</u> | <u>9</u>  | <u>46</u> |
| <u>gravel</u>                    | <u>46</u> | <u>48</u> |
| <u>Silty fine sand w/ gravel</u> | <u>48</u> | <u>70</u> |

RECEIVED  
 SEP 24 2009  
 WATER RESOURCES DEPT  
 BUREAU OF WELL LOGGING

(5) WELL TESTS  
 Pump  Block  Air  Flowing Artesian  
 Yield (gpm): \_\_\_\_\_ (Drawdown): \_\_\_\_\_ (Drift (gpm/ft depth): \_\_\_\_\_ (Duration (hr): \_\_\_\_\_

Date Started: 7/16/09 Completed: 7/17/09

Temperature: 54 °F Lab analysis:  Yes  No  
 Supervising Geologist/Engineer: Jew Lewis  
 Water quality concern?  Yes (describe below) \_\_\_\_\_

(Unsealed) Monitor Well Contractor Certification  
 I certify that the work performed on the construction, deepening, alteration, or abandonment of this well is in compliance with Oregon monitoring well construction standards. Materials used and information reported above are true to the best of my knowledge and belief.  
 License Number: 10430 Date: 9/1/09  
 Signature: \_\_\_\_\_

| From | To | Description | Amount | Units |
|------|----|-------------|--------|-------|
|      |    |             |        |       |

(Sealed) Monitor Well Contractor Certification  
 I accept responsibility for the construction, deepening, alteration, or abandonment work performed on this well during the construction dates reported above. All work performed during this time is in compliance with Oregon monitoring well construction standards. This report was to the best of my knowledge and belief.  
 License Number: 10054 Date: 9/21/09  
 Signature: \_\_\_\_\_  
 Contact Info (optional): Environmental Water Exploration



GW\_118

UMAT 56445

STATE OF OREGON  
MONITORING WELL REPORT  
(as required by ORS 517.765 & OAR 690-240-0295)

WELL LABEL # 91064  
START CARD # 1007461

(1) LAND OWNER (Owner Well ID) MW-12  
First Name Dave Last Name Hanson  
Company Northwest Well  
Address RR3 Box 2106  
City Multnomah County OR Zip 97122

(6) LOCATION OF WELL (legal description)  
County Multnomah Twp 6 N Rng 35 E 1/4 SW 24  
Sec 28 SW 1/4 of the SW 1/4 Tax Lot 1801  
Tax Map Number 1st  
Lat 46' 0" of 100' (100' or 100')  
Long 8' 0" of 100' (100' or 100')  
Street address of well  Meters address

(2) TYPE OF WORK  New  Deepening  Conversion  
 Alteration (top/condition)  Abandonment

(3) DRILL METHOD  
 Rotary Air  Rotary Mud  Cable  Hollow Stem Auger  Cable Mud  
 Reverse Rotary  Other

(7) STATIC WATER LEVEL  
Date 7/20/09 SWL (psf) + SWL (ft)  
Existing Well / Piezometer 7/20/09 or  
Completed Well 7/20/09 - 40'  
Flowing Artesian?  Day Head?   
WATER BEARING ZONES Depth water was first found 40'

(4) CONSTRUCTION (Packer Well)   
Depth of Completed Well 70' ft. Special Standard

MONUMENT/VAULT Above Ground  
From 2.5' To 2.5'

BORE HOLE  
Diameter 6" from 0' to 70'

CASING  
Dia 2" from 2.5' to 30'  
Gauge 2x4 40' Wd 1/2"  
Material Steel  Plastic

LINER  
Dia 0 1/4" To  
Gauge 0 1/4" Wd 1/2"  
Material Steel  Plastic

SEAL  
From 1.5' To 28'  
Material Butyrate Chgs  
Amount 5 bags Gravel weight

SCREEN  
Casing liner Material 2x4 40 PM  
Diameter 2" from 30' to 70'  
Wd Size .020

FILTER  
From 28' To 70' Material Sand Size of pack 10/20

| SWL Date | From | To  | Est. Flow | SWL (psf) | + SWL (ft) |
|----------|------|-----|-----------|-----------|------------|
| 7/20/09  | 40'  | 70' |           |           | 40'        |

(8) WELL LOG Ground Elevation

| Material                       | From | To |
|--------------------------------|------|----|
| Silt                           | 0    | 8  |
| Gravelly Silt                  | 8    | 11 |
| Silty Gravel                   | 11   | 42 |
| Gravelly Sand                  | 42   | 50 |
| Silty fine sand / silty gravel | 50   | 70 |

RECEIVED  
SEP 24 2009  
WATER RESOURCES DEPT  
SALEM, OREGON

(5) WELL TESTS  
 Pump  Dike  Air  Flowing Artesian  
Yield (gpm) Direction Drill stem/Temp depth Diameter (in)

Temperature 54 °F Lab analysis  Yes  No  
Supervising Geologist/Engineer JON TRAVIS  
Water quality concerns?  Yes (describe below)  
From To Description Amount (ft)

Date Started 7/20/09 Completed 7/20/09

(Unbonded) Monitor Well Constructor Certification  
I certify that the work I performed on the construction, deepening, alteration, or abandonment of this well is in compliance with Oregon monitoring well construction standards. Material used and information reported above are true to the best of my knowledge and belief.  
License Number 10430 Date 7/1/09  
Printed (if Non-electronically)  
Signed [Signature]

(Bonded) Monitor Well Constructor Certification  
I accept responsibility for the construction, deepening, alteration, or abandonment work performed on this well during the construction dates reported above. All work performed during this time is in compliance with Oregon monitoring well construction standards. This report is to the best of my knowledge and belief.  
License Number 10054 Date 9/21/09  
Printed (if Non-electronically)  
Signed [Signature]  
Contact Info: Jon Travis, Environmental West Exploration

GW\_119

UMAT 56447

STATE OF OREGON  
MONITORING WELL REPORT  
(as required by ORS 517.95 & OAR 690-006-0295)

**DRAFT**

WELL LABEL # 91065  
START CARD # 201096

(1) LAND OWNER  
Owner Well ID: MW-13  
First Name Jan Last Name Brough  
Company \_\_\_\_\_  
Address 51396 Phillips Rd  
City Albion-Fresno State OR Zip 97862

(2) TYPE OF WORK  New  Deepening  Conversion  
 Abandon (repair/consolidate)  Abandonment

(3) DRILL METHOD  
 Rotary Air  Rotary Mud  Cable  Hollow Stem Auger  Cable Mud  
 Reverse Rotary  Other

(4) CONSTRUCTION Passive Well   
Depth of Completed Well 40 ft. Spec of Standard



MONUMENT/VALVE Borehole Closed  
From 2.5 To 2.5

BORE HOLE  
Diameter 6" from 0 To 40

CASING  
Dia 2" from 2.5 To 10  
Gauge sch 40 Wtd Thd \_\_\_\_\_  
Material Steel  Plastic

LINER  
Dia N/A To \_\_\_\_\_  
Gauge N/A Wtd Thd \_\_\_\_\_  
Material Steel  Plastic

SEAL  
From 1.5' To 8'  
Material Bestcrete Chips  
Amount 12 bags Gravel weight \_\_\_\_\_

SCREEN  
 Comp. Case Material 40 PVC  
Diameter 2" From 10' To 40'  
Mat Size .020

FILTER  
From 8' To 40' Material Sand Size of pack 10/20

(5) WELL TESTS  
 Pump  Meter  All  Flowing Artesian  
Yield (gpm) \_\_\_\_\_ Drawdown \_\_\_\_\_ Drill stem/Flow (gpm) \_\_\_\_\_ Duration (hr) \_\_\_\_\_

Temperature 54°F Lab analysis  Yes  No  
Supervising Geologist/Engineer Jan Travis  
Water quality concerns?  Yes (describe below)  No  
From \_\_\_\_\_ To \_\_\_\_\_ Description \_\_\_\_\_ Amount \_\_\_\_\_ Unit \_\_\_\_\_

(6) LOCATION OF WELL (legal description)  
County Washita Twp 6 N Range 35 E 1/4 NW  
Sec 30 NW 1/4 of the NE 1/4 Sec 500  
Sec. 500 Number \_\_\_\_\_ 1/4  
1/4 \_\_\_\_\_ (NW or SE)  
1/4 \_\_\_\_\_ (NE or SW)  
Street address of well \_\_\_\_\_ / Home address \_\_\_\_\_

Brough Ranch - Dugger Creek

(7) STATIC WATER LEVEL

| Test                       | SWL (psf)     | + SWL (ft) |
|----------------------------|---------------|------------|
| Flowing Well / Perforating |               |            |
| Completed Well             | <u>7.8109</u> | <u>-12</u> |

Water Bearing Units: Flowing Artesian?  Dry Hole?   
Depth water was first found 12'

| SWL Date       | Flow       | To         | Sec. 500 | SWL (psf) | + SWL (ft) |
|----------------|------------|------------|----------|-----------|------------|
| <u>7/29/09</u> | <u>12'</u> | <u>40'</u> |          |           | <u>-12</u> |

(8) WELL LOG

| Material               | From      | To        |
|------------------------|-----------|-----------|
| <u>Silt</u>            | <u>0</u>  | <u>7</u>  |
| <u>Silty fine sand</u> | <u>7</u>  | <u>30</u> |
| <u>Silty gravel</u>    | <u>30</u> | <u>40</u> |

RECEIVED

SEP 24 2009

WATER RESOURCES DEPT  
SALEEM, OREGON

Date Started 7/29/09 Completed 7/29/09

(Unofficial) Monitor Well Constructor Certification  
I certify that the work performed on the construction, deepening, alteration, or abandonment of this well is in compliance with Oregon monitoring well construction standards. Maximum yield and information reported above are true to the best of my knowledge and belief.

License Number 10430 Date 9/10/09  
Password (if filing electronically) \_\_\_\_\_  
Signed Jan Travis

(Official) Monitor Well Constructor Certification  
I accept responsibility for the construction, deepening, alteration, or abandonment work performed on this well during the construction dates reported above. All work performed during this time is in compliance with Oregon monitoring well construction standards. This certification is to the best of my knowledge and belief.

License Number 10054 Date 9/21/09  
Password (if filing electronically) \_\_\_\_\_  
Signed Jan Travis  
Contact info (optional) Environmental Well Exploration

**GW\_135**

No well log

GW\_141

UMAT 57169

UMAT 57169

STATE OF OREGON  
MONITORING WELL REPORT

(as required by ORS 537.205 & OAR 690-240-055)  
Instructions for completing this report are on the first page of this form.

WELL ID #: 97758  
Site Code #: 1017462

(1) OWNER/PROJECT: WELL NO. 97758  
Name: Walla Walla Basin watershed council  
Address: 810 S. Main St  
City: MULTON, OR Zip: 97602

(6) LOCATION OF WELL By legal description  
Well Location: County Umatilla  
Township 5 N Range 35 E Section 2  
NW 1/4 of NW 1/4 of above section  
Street address of well location: 83757 Winsap Rd  
City or town: MULTON, OR 97602  
Tax parcel number of well location: 500  
ATTACH MAP WITH LOCATION IDENTIFIED. Map shall include approximate north and north arrow.


(2) TYPE OF WORK:  
 New installation  Alteration (Repair/Reconstruction)  
 Cleanout  Deepening  Abandonment

(3) DRILLING METHOD:  
 Rotary Air  Rotary Mud  Cased  
 Shallow Stair Auger  Other

(7) STATIC WATER LEVEL:  
38 ft. below land surface Date: 4/16/13  
Artesian Pressure: \_\_\_\_\_ Day is \_\_\_\_\_ Date: \_\_\_\_\_

(4) BORE HOLE CONSTRUCTION:  
Special Situations   Depth of completed well: 55 ft.

(8) WATER BEARING ZONES:  
Depth at which water was first found: 38

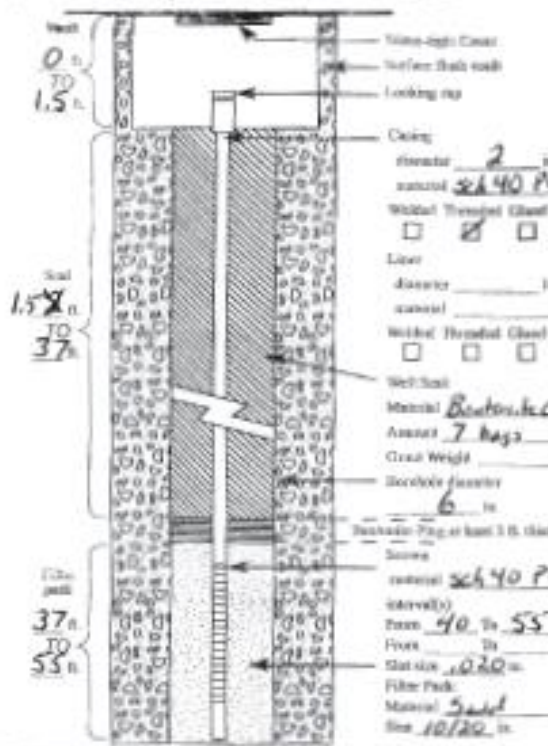

(9) WELL LOG: Ground elevation \_\_\_\_\_

| Interval             | From | To | DWL |
|----------------------|------|----|-----|
| Sand gravel w/ silt  | 0    | 5  |     |
| Silty sandy gravel   | 5    | 25 |     |
| Sandy gravel w/ silt | 25   | 55 | 38  |

RECEIVED BY OWRD  
APR 22 2013  
SALEM, OR  
RECEIVED BY OWRD  
JUN 13 2013  
SALEM, OR  
Date started: 4/16/13 Completed: 4/16/13

(5) WELL TEST:  
Pump: \_\_\_\_\_ Meter: \_\_\_\_\_ Air: \_\_\_\_\_ Flowing Artesian: \_\_\_\_\_  
Permeability: \_\_\_\_\_ Yield: \_\_\_\_\_ GPM  
Conductivity: \_\_\_\_\_ (d)  
Temperature of Water: 54 °F Depth to water below ground: \_\_\_\_\_ ft.  
Was water analyzed from? Yes  No   
By whom? \_\_\_\_\_  
Depth of water to be analyzed: From \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
Remarks: \_\_\_\_\_  
Name of supervising Geologist/Engineer: Robert Fisher

(a) (b) (c) Monitor Well Construction or Certification:  
I certify that the work performed on the construction, alteration, or abandonment of this well is in compliance with Oregon well construction standards. Materials used and information reported above are true to the best knowledge and belief.  
MWC Number: 10430  
Date: 4/16/13  
Signature: [Signature]

(d) (e) Monitor Well Construction or Certification:  
I accept responsibility for the construction, alteration, or abandonment work performed on this well being in compliance with Oregon well construction standards. This report is made to the best of my knowledge and belief.  
MWC Number: 10054  
Date: 4-2-13  
Signature: [Signature]

UMAT 57171

UMAT 57171

STATE OF OREGON  
MONITORING WELL REPORT

(as required by ORS 517.765 & OAR 696-248-095)  
Instructions for completing this report are on the last page of this form.

Well ID #: 47760  
Site Code #: 1019463

(1) OWNER/PROJECT: WELL NO. Trumbull  
Name: Walla Walla Basin Watershed Council  
Address: 810 S. Main  
City: Multon Forewade, OR State: OR Zip: 97862

(6) LOCATION OF WELL: By legal description

Well Location: County Washita  
Township 6 N Range 35 E Section 27  
SW of SW of above section  
Elevation of well location: 5344 ft approximate sluwy  
Municipality: Multon Forewade, OR 97862  
Tax lot number of well location: 900

(2) TYPE OF WORK:

- New construction  Alteration (Repair/Remediation)  
 Conversion  Deepening  Abandonment

(3) DRILLING METHOD:

- Rotary Air  Rotary Mud  Cables  
 Hollow Stem Auger  Other \_\_\_\_\_

(7) STATIC WATER LEVEL:


26 ft. below land surface Date 4/17/13  
Atmospheric Pressure \_\_\_\_\_ lb/sq in Date \_\_\_\_\_

(4) BORE HOLE CONSTRUCTION:

Special Standards   Depth of completed well: 36 ft

(8) WATER BEARING ZONES:

Depth at which water was first found: 26

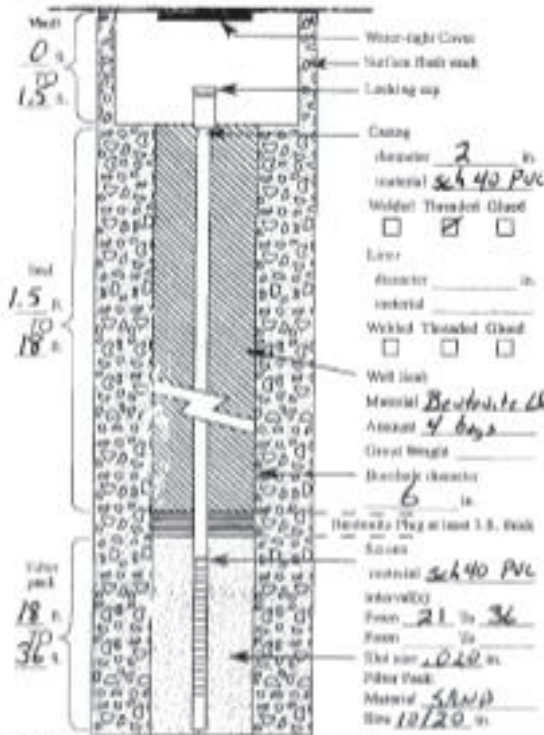

(9) WELL LOG: Ground elevation \_\_\_\_\_

| From | To | Est. Flow Rate | SWL |
|------|----|----------------|-----|
| 26   | 36 |                | 26  |
|      |    |                |     |
|      |    |                |     |
|      |    |                |     |

| Material           | From | To | SWL |
|--------------------|------|----|-----|
| Silty Sand         | 0    | 5  |     |
| Sand Gravel        | 5    | 12 |     |
| Silty Sandy Gravel | 12   | 36 | 26  |
|                    |      |    |     |
|                    |      |    |     |
|                    |      |    |     |
|                    |      |    |     |
|                    |      |    |     |

RECEIVED BY OWRD

APR 22 2013

RECEIVED BY OWRD

SALEM, OR

JUN 14 2013

SALEM, OR

Date started: 4/17/13 Completed: 4/17/13

(5) WELL TEST:

Flowing Artesian: \_\_\_\_\_  
Permeability: \_\_\_\_\_ Yield: \_\_\_\_\_ GPM  
Coarseness: \_\_\_\_\_ gtl  
Temperature of Water: 54 °F Depth sensor bore hole: \_\_\_\_\_ ft  
Was water analyzed done? Yes  No   
By whom? \_\_\_\_\_  
Depth of water to be analyzed: From \_\_\_\_\_ ft to \_\_\_\_\_ ft  
Remarks: \_\_\_\_\_

Name of supervising Geologist/Engineer: Roger Fredis

(Optional) Monitor Well Construction Certification:

I certify that the work I performed on the construction, alteration, or abandonment of this well is in compliance with Oregon well construction standards. Materials used and information reported above are true to the best knowledge and belief.

Signed: [Signature] MWC Number: 10430  
Date: 4/17/13

(Optional) Monitor Well Construction Certification:

I accept responsibility for the construction, alteration, or abandonment work performed on this well during the construction dates reported above. All work performed during this time is in compliance with Oregon well construction standards. This report is true to the best of my knowledge and belief.

Signed: [Signature] MWC Number: 10054  
Date: 4-19-13

GW\_143

UMAT 57170

UMAT 57170

STATE OF OREGON  
MONITORING WELL REPORT

(as required by ORS 516.065 & OAR 800-001-0000)

(1) OWNER/PROJECT: WILL NO. Abund Creek  
Name: Walla Walla Basin watershed council  
Address: 810 S main  
City: Milton, Washington OR Zip: 97862

Well ID #: 97759  
Well Code: 1019464

(2) TYPE OF WORK:

- New construction  Alteration (Repair/Replacement)  
 Cleanout  Deepening  Abandonment

(6) LOCATION OF WELL: By legal description

Well Location: County Washello  
Township 6 N Range 35 E Section 28  
SW 1/4 of NE 1/4 of above section  
Street address of well location: Preston Lane  
Milton, Washington OR 97862  
Tax lot number of well location: 1900

ATTACH MAP WITH LOCATION IDENTIFIED. Map shall include approximately north and south acres.

(3) DRILLING METHOD:

- Rotary Air  Rotary Mud  Casing  
 Hollow Stem Auger  Other \_\_\_\_\_

(7) STATIC WATER LEVEL:


19 ft. below land surface Date: 4/16/13  
Atmos Pressure \_\_\_\_\_ Bar in Date \_\_\_\_\_

(4) BORE HOLE CONSTRUCTION:

Special Standards   Depth of completed well: 25 ft.

(8) WATER BEARING ZONES:

Depth at which water was first found: 19

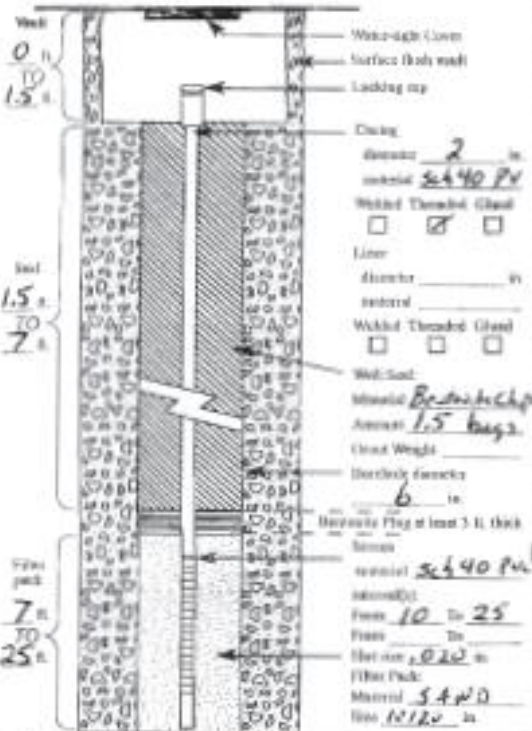

| From | To | Est. Flow Rate | SWL |
|------|----|----------------|-----|
| 19   | 25 |                | 19  |
|      |    |                |     |
|      |    |                |     |

(9) WELL LOG:

| Material            | From | To | SWL |
|---------------------|------|----|-----|
| Silty Sand          | 0    | 5  |     |
| Silt                | 5    | 10 |     |
| Sandy Silt          | 10   | 17 |     |
| Silty sand (yellow) | 17   | 25 | 19  |
|                     |      |    |     |
|                     |      |    |     |

(5) WELL TEST:

Flow Rate \_\_\_\_\_ GPM  
Permeability \_\_\_\_\_  
Conductivity \_\_\_\_\_ gT  
Temperature of Water 54 °F Depth above flow level \_\_\_\_\_ ft.  
Was water analyzed? Yes  No   
By whom? \_\_\_\_\_  
Depth of water to be analyzed: From \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
Remarks \_\_\_\_\_  
Name of supervising Geologist/Engineer: Roder Fendler

RECEIVED BY OWRD  
APR 22 2013  
RECEIVED BY OWRD  
SALEM, OR  
JUN 14 2013  
SALEM, OR  
Date started: 4/16/13 Completed: 4/16/13

(Installer) Master Well Contractor Certification:  
I certify that the work performed on the construction, alteration, or abandonment of this well is in compliance with Oregon well construction standards. Materials used and information reported above are true to the best knowledge and belief.  
Signed: [Signature] MWC License: 10430 Date: 4/16/13

(Reader) Master Well Contractor Certification:  
I accept responsibility for the construction, alteration, or abandonment work performed on this well during the construction dates reported above. All work performed during this time is in compliance with Oregon well construction standards. This report is made to the best of my knowledge and belief.  
Signed: [Signature] MWC License: 10054 Date: 4-19-13

GW\_144

UMAT 57172

UMAT 57172

STATE OF OREGON  
MONITORING WELL REPORT  
(as required by ORS 512.205 & ORS 512.210)

WELL ID: 97761  
Well Code: 1019965

(1) OWNER/PROJECT: WELL NO. 97761  
Walla Walla Basin watershed Council  
Address: 810 S Main  
Milton, Oregon, OR 97132

(6) LOCATION OF WELL: By legal description  
Well Location: County Walla Walla  
Township 6 N Range 34 E Section 24  
S2, N of SE N of above section  
Section address of well location: 50901 Umpqua Rd  
Milton, Oregon, OR 97132  
Tax lot number of well location: \_\_\_\_\_  
ATTACH MAP WITH LOCATION IDENTIFIED. Map shall include approximate scale and north arrow.

(2) TYPE OF WORK:  
 New construction  
 Alteration (Repair/Reconstruction)  
 Correction  
 Deepening  
 Abandonment


(3) DRILLING METHOD:  
 Rotary Air  
 Rotary Mud  
 Cable  
 Shallow Drive Auger  
 Other \_\_\_\_\_

(7) STATIC WATER LEVEL:  
24 ft below land surface Date 4/17/13  
Artesian Pressure \_\_\_\_\_ ftq in Date \_\_\_\_\_

(4) BORE HOLE CONSTRUCTION:  
Special Standards   Depth of casing head well 36 ft

(8) WATER BEARING ZONES:  
Depth at which water was first found 24

| From      | To        | Est. Flow Rate | SWL       |
|-----------|-----------|----------------|-----------|
| <u>24</u> | <u>36</u> |                | <u>24</u> |
|           |           |                |           |
|           |           |                |           |

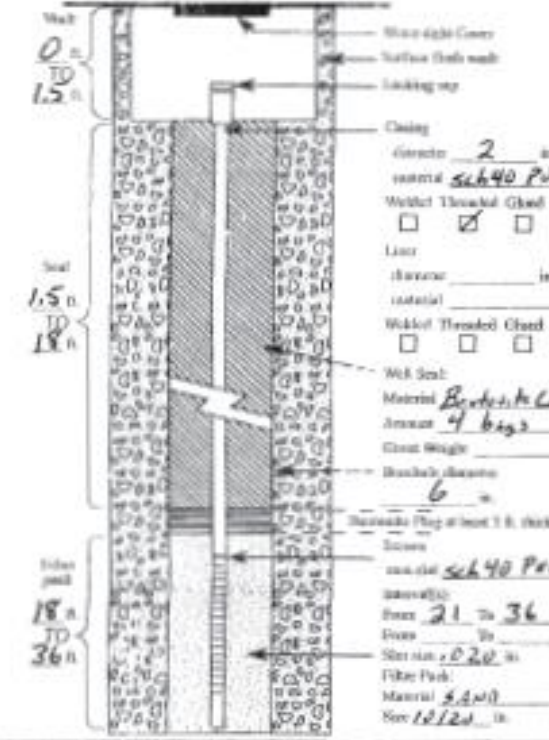

(9) WELL LOG: Ground elevation \_\_\_\_\_

| Material                  | From     | To        | SWL       |
|---------------------------|----------|-----------|-----------|
| <u>Silty Sand</u>         | <u>0</u> | <u>5</u>  |           |
| <u>Silty Sandy Gravel</u> | <u>5</u> | <u>36</u> | <u>24</u> |
|                           |          |           |           |
|                           |          |           |           |

RECEIVED BY OWRD  
APR 22 2013  
SALEM, OR  
RECEIVED BY OWRD  
JUN 14 2013  
SALEM, OR

Date started 4/17/13 Completed 4/17/13

(5) WELL TEST:  
Pump (Variable) \_\_\_\_\_ GPM  
Flowing Artesian (Yield) \_\_\_\_\_ GPM  
Conductivity \_\_\_\_\_ gpd  
Temperature of Water 54 F Depth of test line fixed \_\_\_\_\_ ft.  
Was water tested on site? Yes CSO  
By whom? \_\_\_\_\_  
Depth of strata to be analyzed: From \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
Remarks \_\_\_\_\_  
Name of supervising Geologist/Engineer Rene Foster

(Unneeded) Monitor Well Contractor Certification:  
I certify that the work I performed on the construction, alteration, or abandonment of this well is in compliance with Oregon well construction standards. Material used and information reported above are true to the best knowledge and belief.  
Signed [Signature] MWC Number 10930  
Date 4/18/13

(Unneeded) Monitor Well Contractor Certification:  
I accept responsibility for the construction, alteration, or abandonment work performed on this well during the construction phase reported above. All work performed during this work is in compliance with Oregon well construction standards. This report is true to the best of my knowledge and belief.  
Signed [Signature] MWC Number 10054  
Date 4-19-13